



The PANDA Detector @ FAIR




Anastasios Tassos Belias / GSI

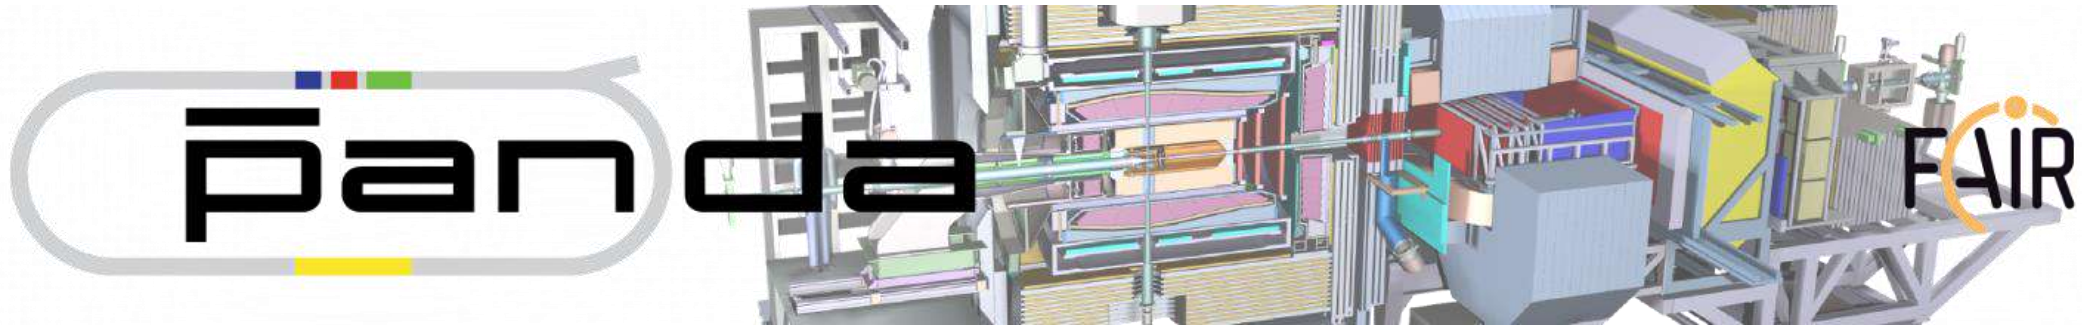

International Centre
for Theoretical Physics
South American Institute
for Fundamental Research

**ICTP-SAIFR/FAIR
WORKSHOP ON MASS
GENERATION IN QCD**

February 25 – March 1, 2019.
at Instituto de Física Teórica - UNESP, São Paulo, Brazil

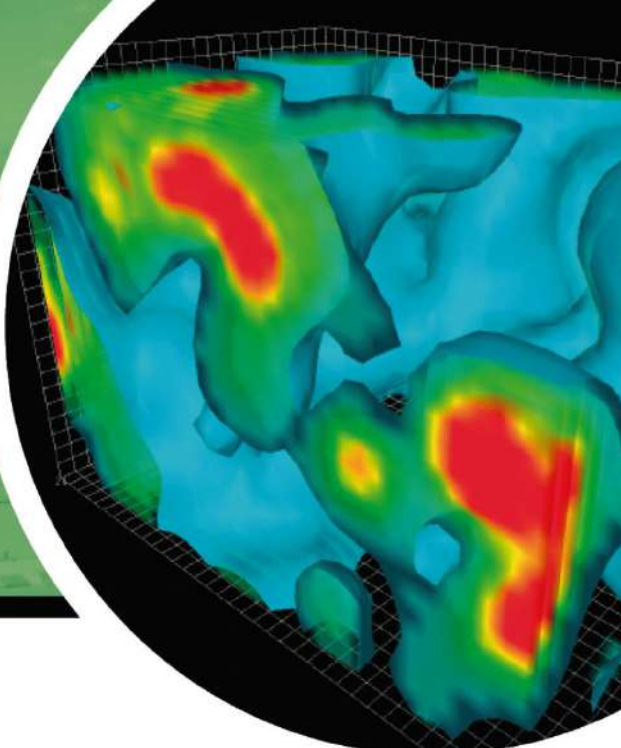


The PANDA Detector @ FAIR

Antiprotons @ FAIR

PANDA Detector

Schedule & Opportunities

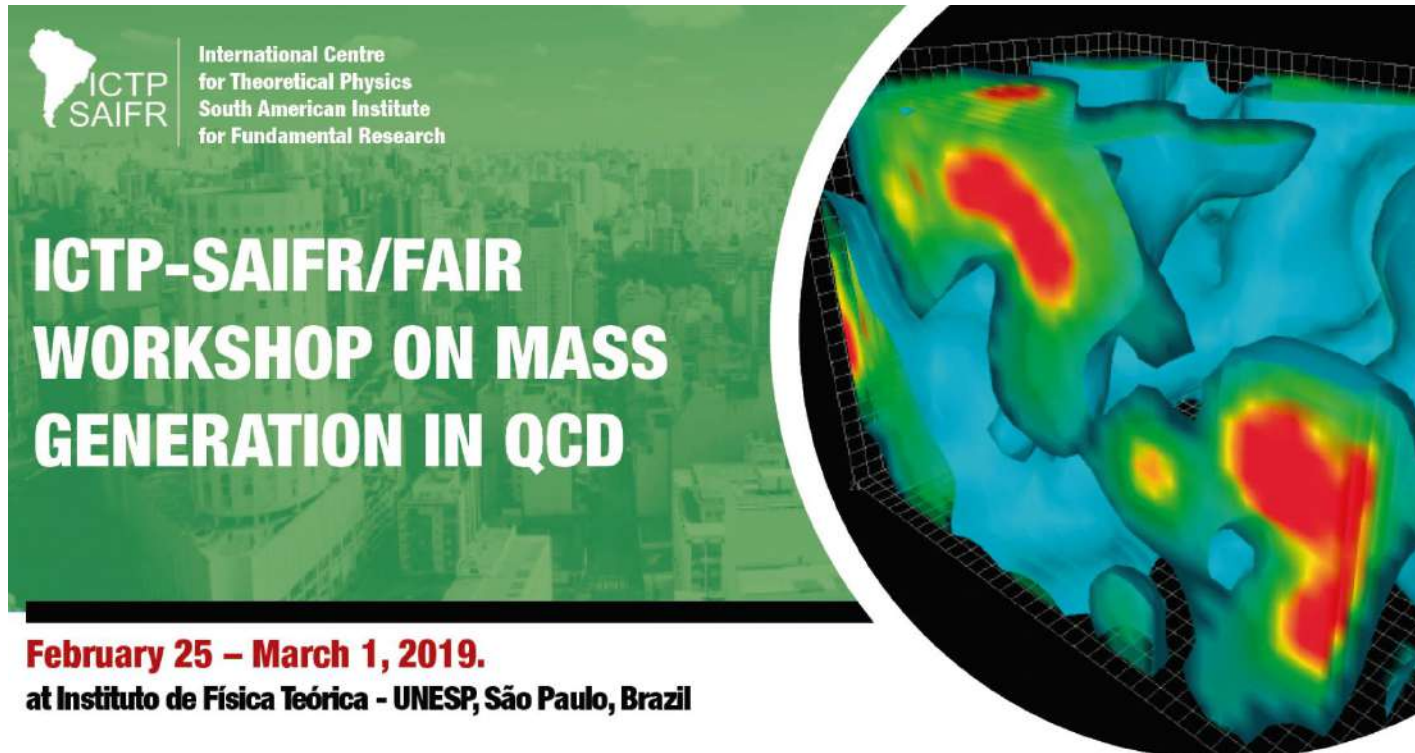

The poster features a green background on the left with the ICTP-SAIFR logo and text. On the right, a circular inset shows a 3D visualization of a complex, multi-colored surface, likely representing a physical phenomenon in QCD. The text is in white and red, providing details about the workshop.

ICTP
SAIFR


International Centre
for Theoretical Physics
South American Institute
for Fundamental Research

**ICTP-SAIFR/FAIR
WORKSHOP ON MASS
GENERATION IN QCD**

February 25 – March 1, 2019.
at Instituto de Física Teórica - UNESP, São Paulo, Brazil


Facility for Antiproton and Ion Research FAIR GSI

@ GSI, near Darmstadt, Germany

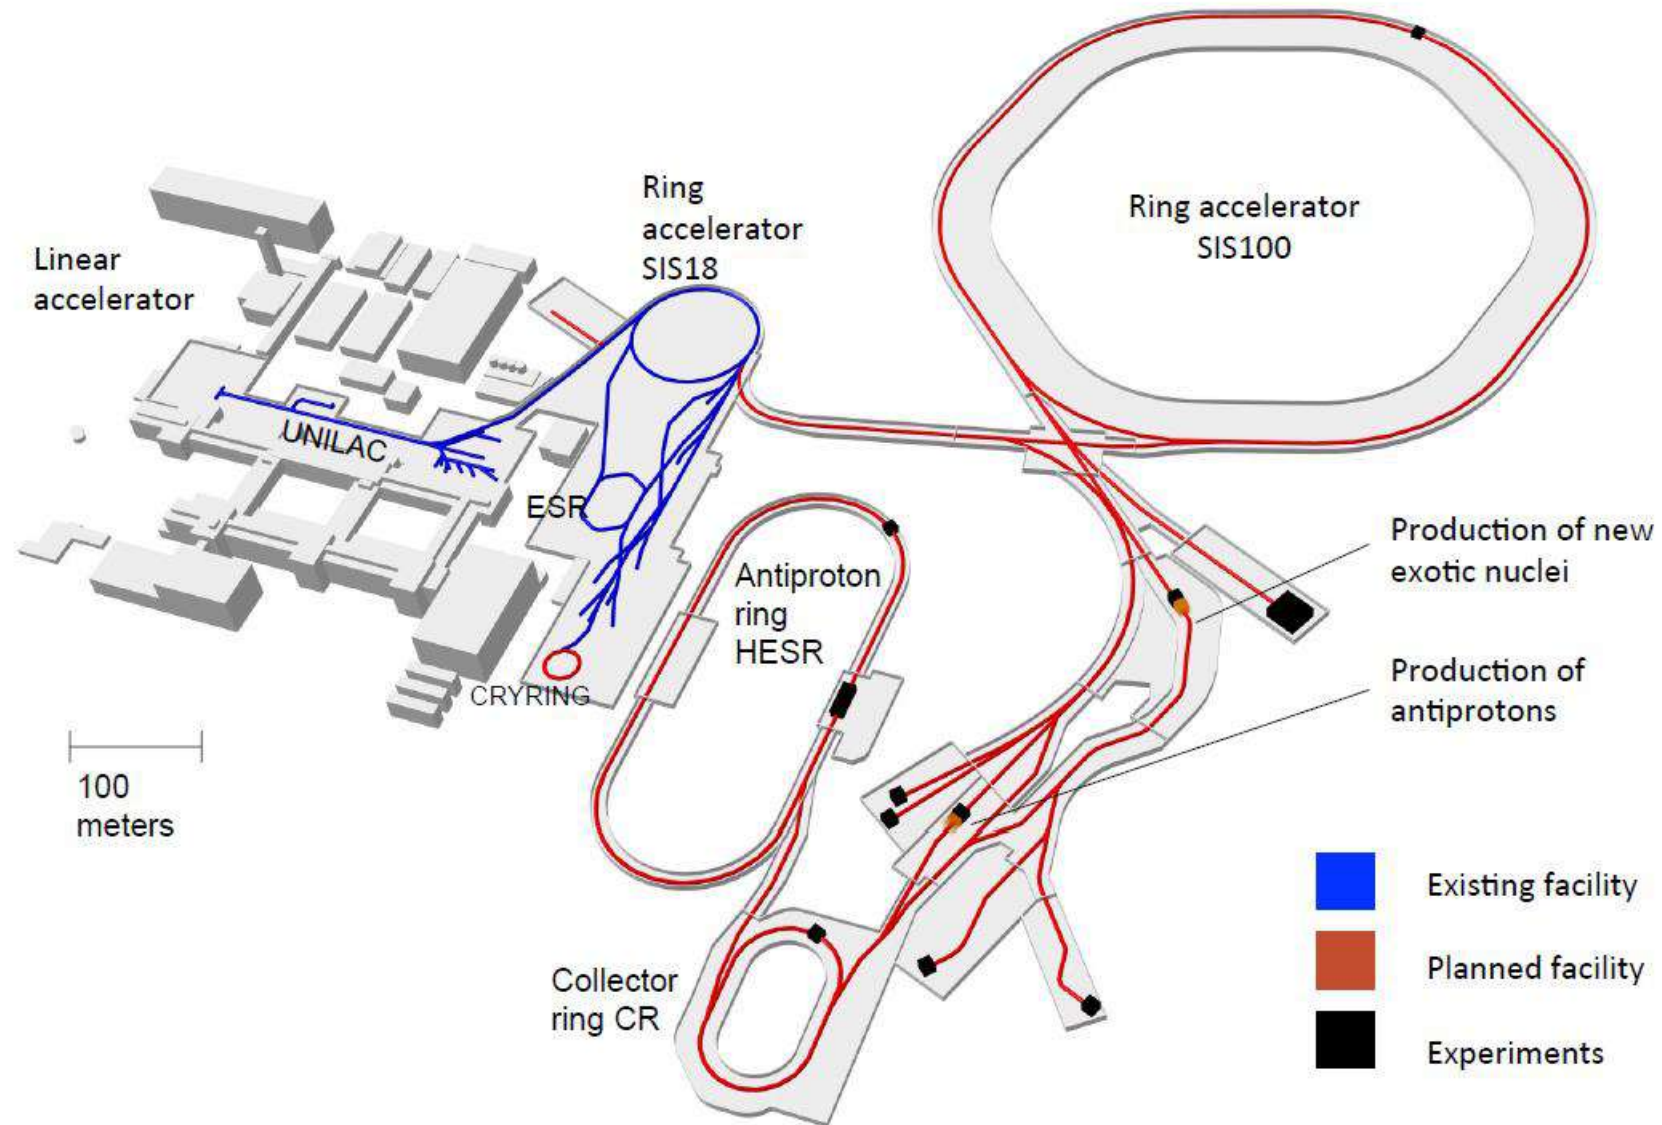

Facility for Antiproton and Ion Research FAIR GSI

@ GSI, near Darmstadt, Germany

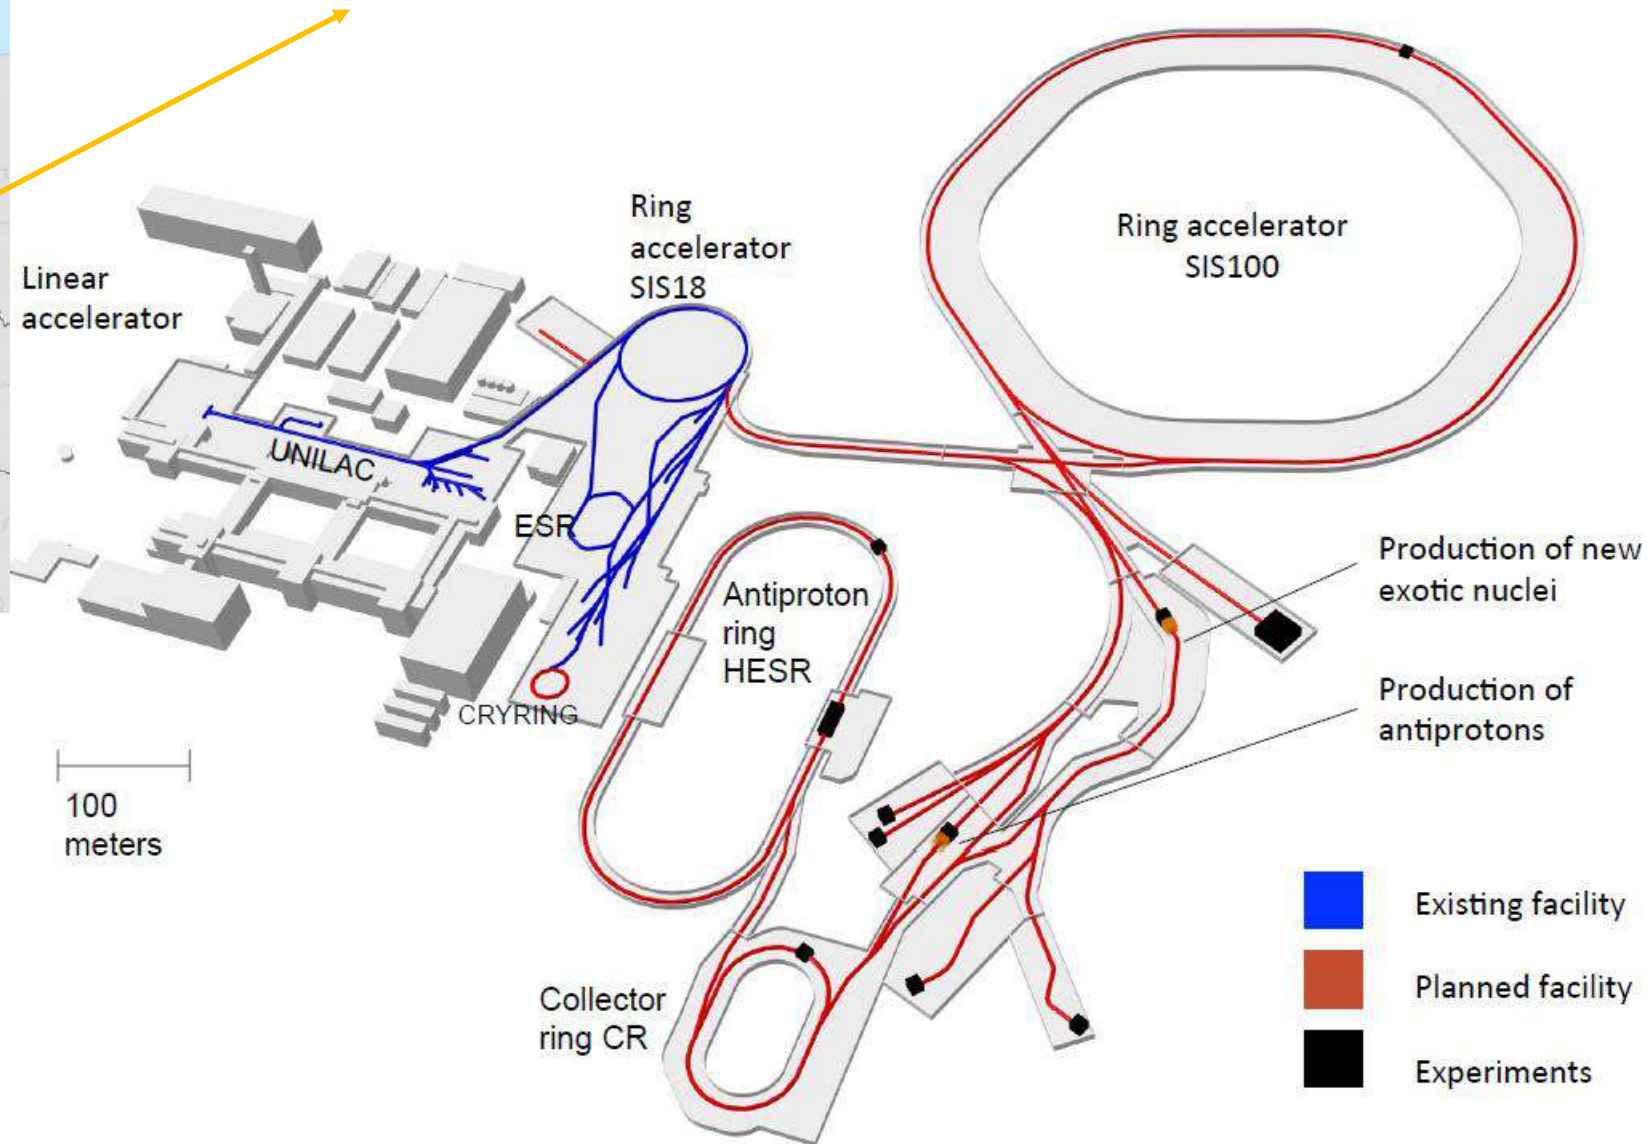

FAIR


... accelerates particle beams from (anti)protons up to uranium ions with

- very high intensities
 - up to a factor of ~ 100 increase for primary Uranium beams ($\sim 5 \times 10^{11}$ U^{28+} ions /s),
 - up to a factor of ~ 10.000 increase for secondary rare isotope beams
- high pulse power (up to ~ 50 kJ / 50 ns)
- suite of storage cooler rings equipped with stochastic and electron cooling for brilliant beam quality


... develops and exploits innovative particle separation and detection methods, as well as novel computing techniques

... to perform forefront experiments towards the production and investigation of

New Extreme States of Matter.

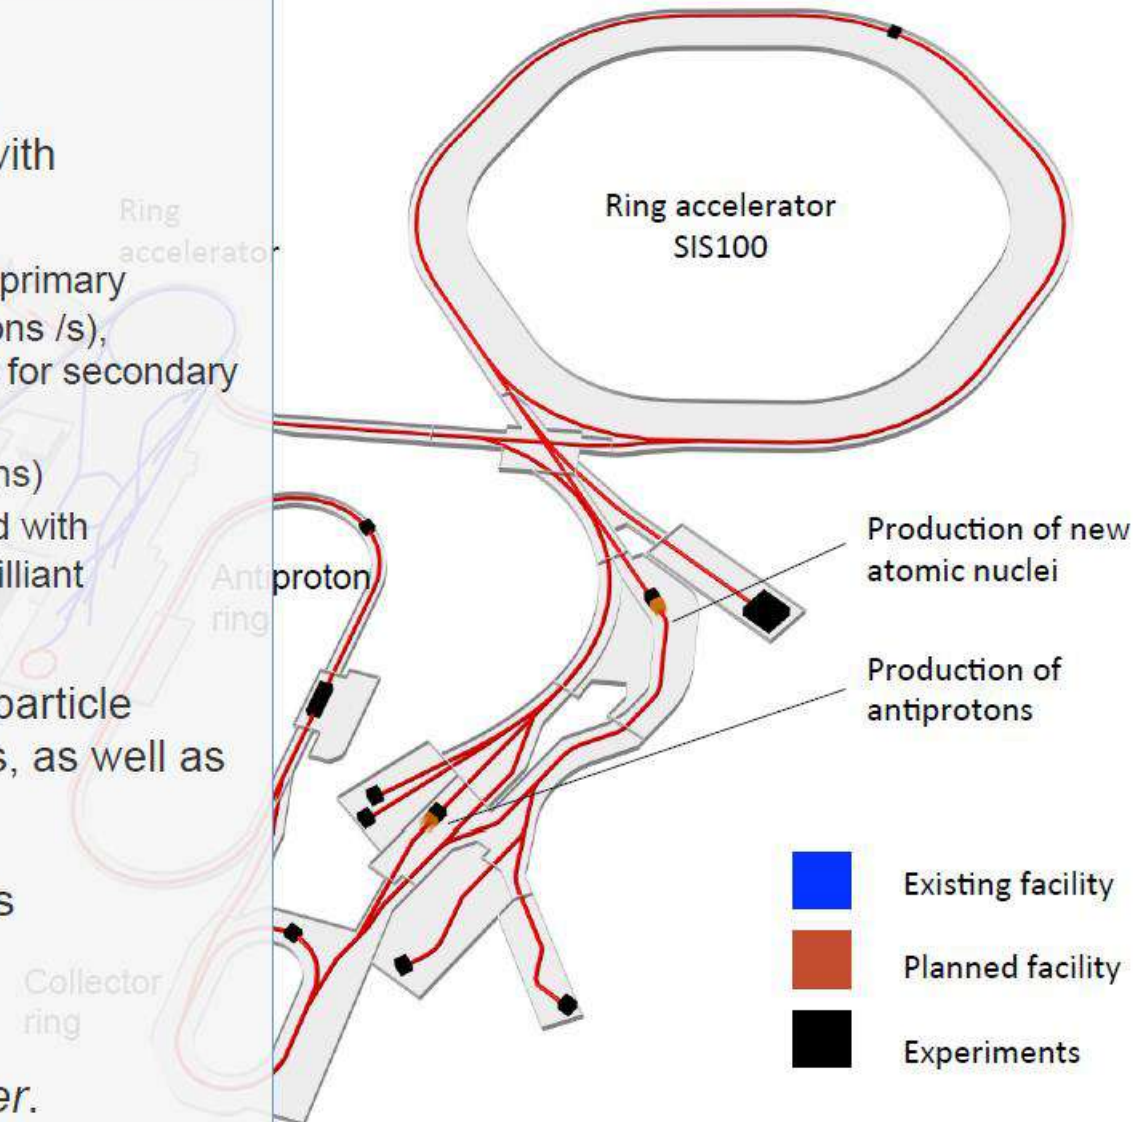

FAIR – four research pillars

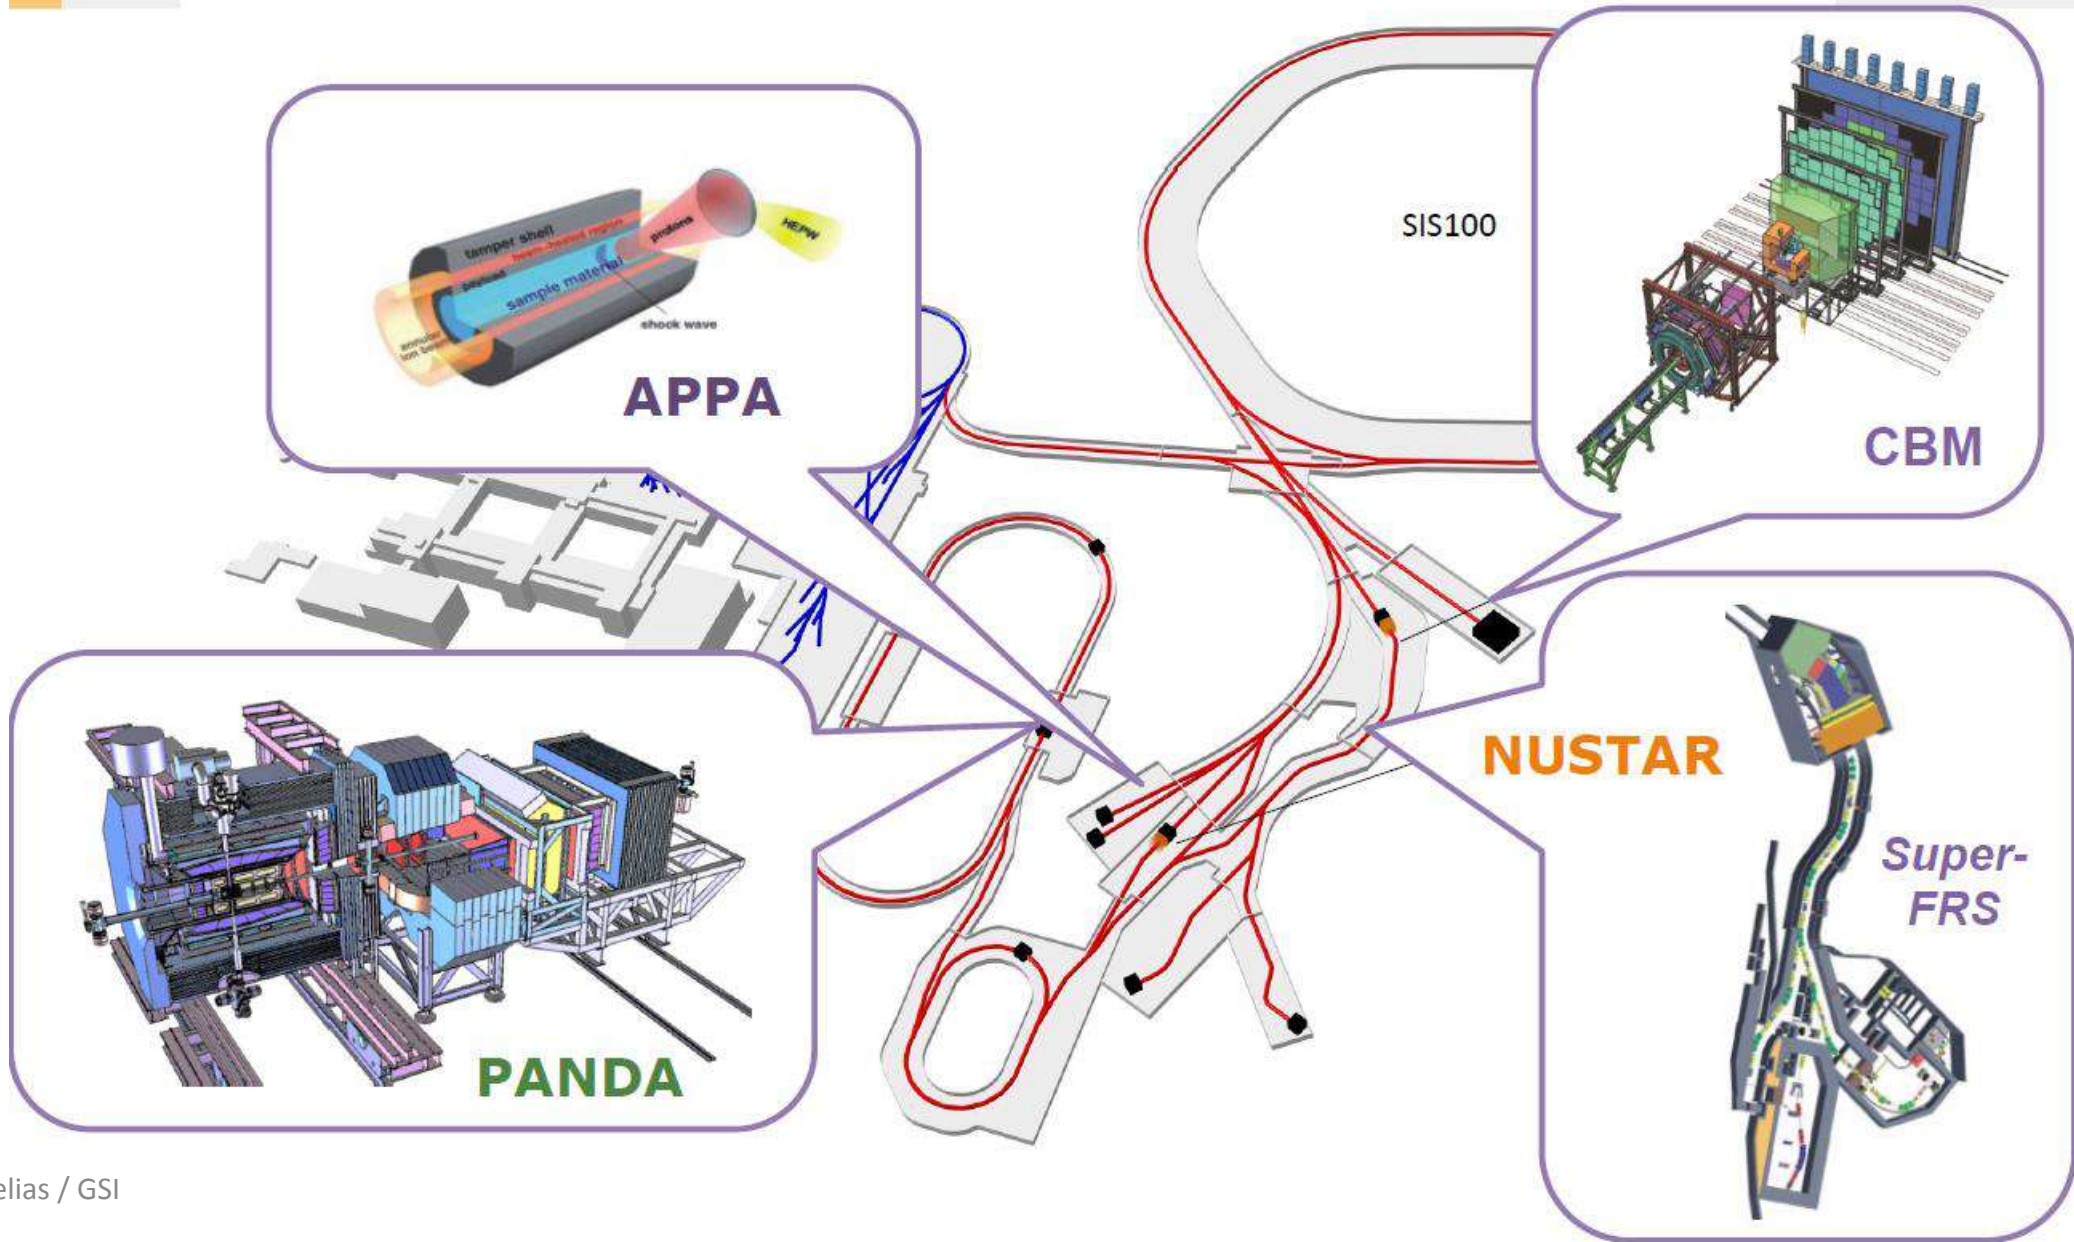


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

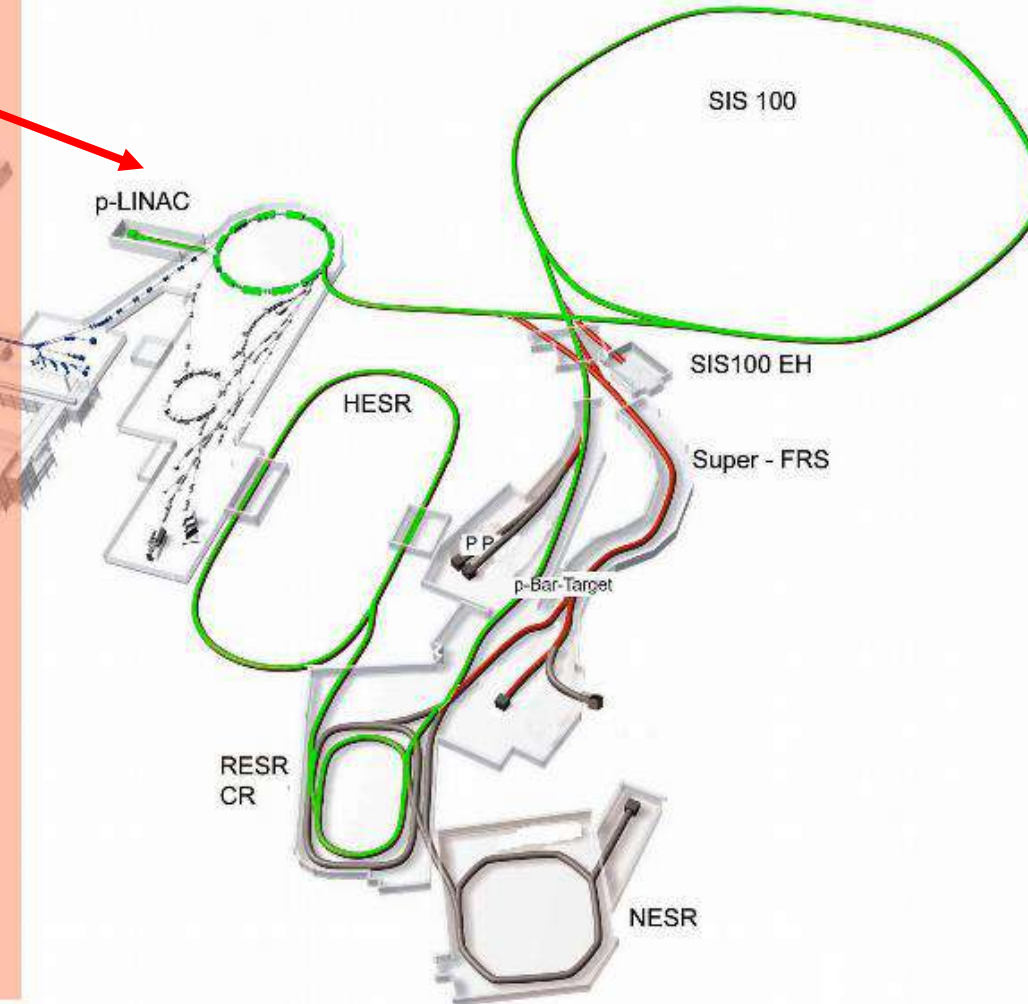


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

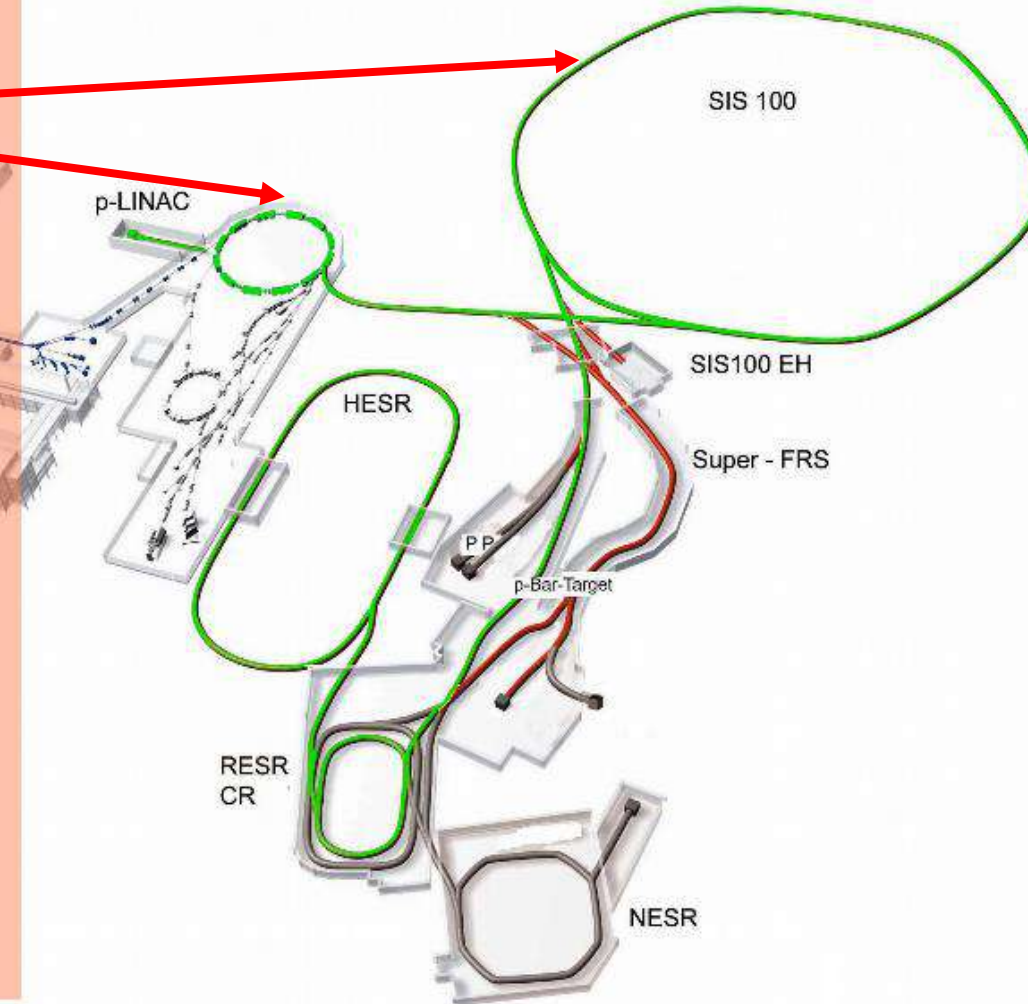


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

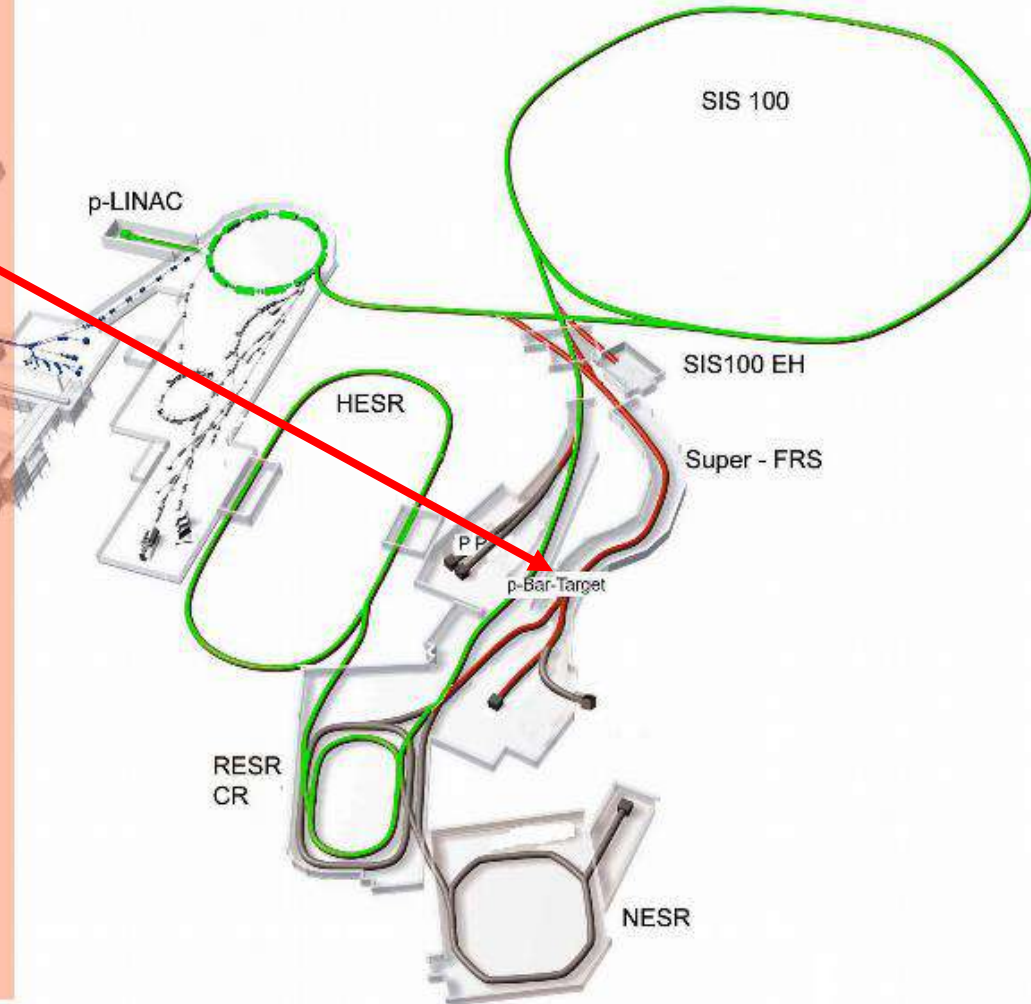


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

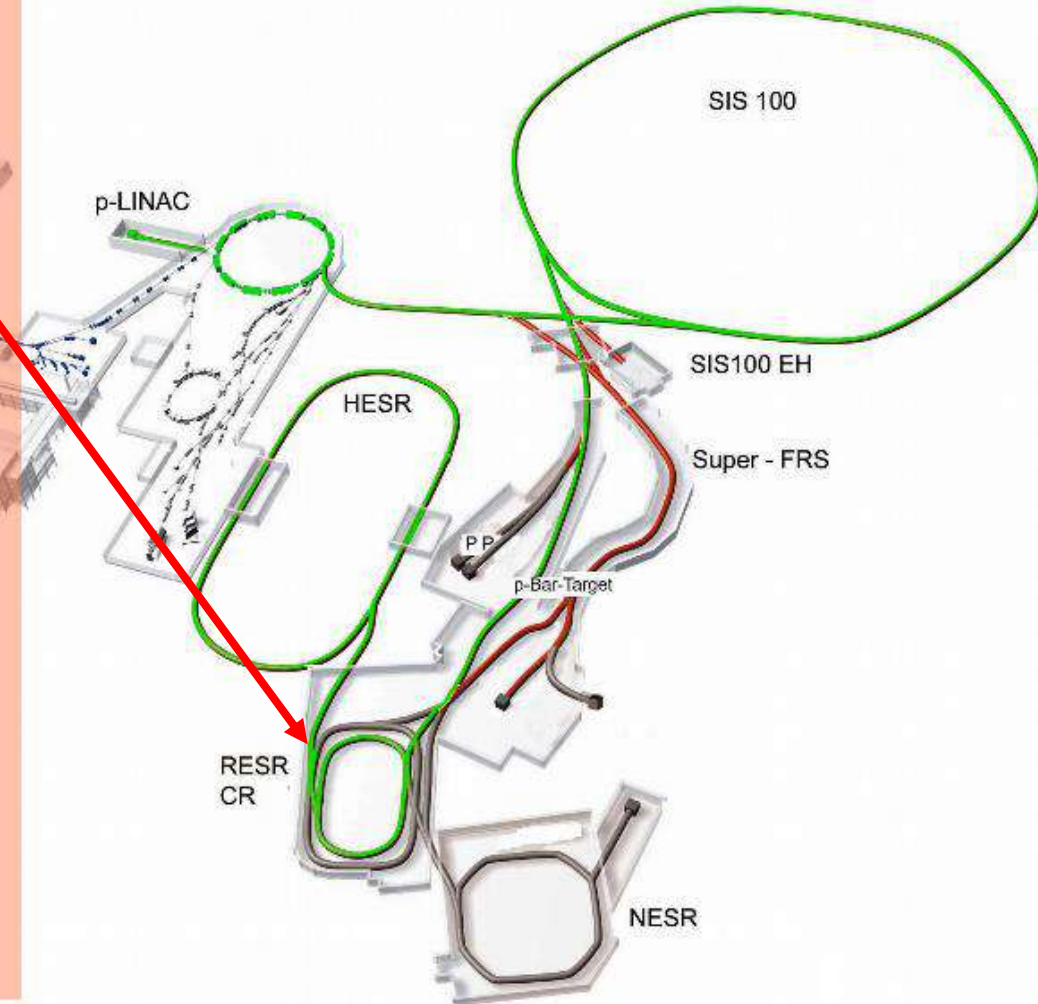


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

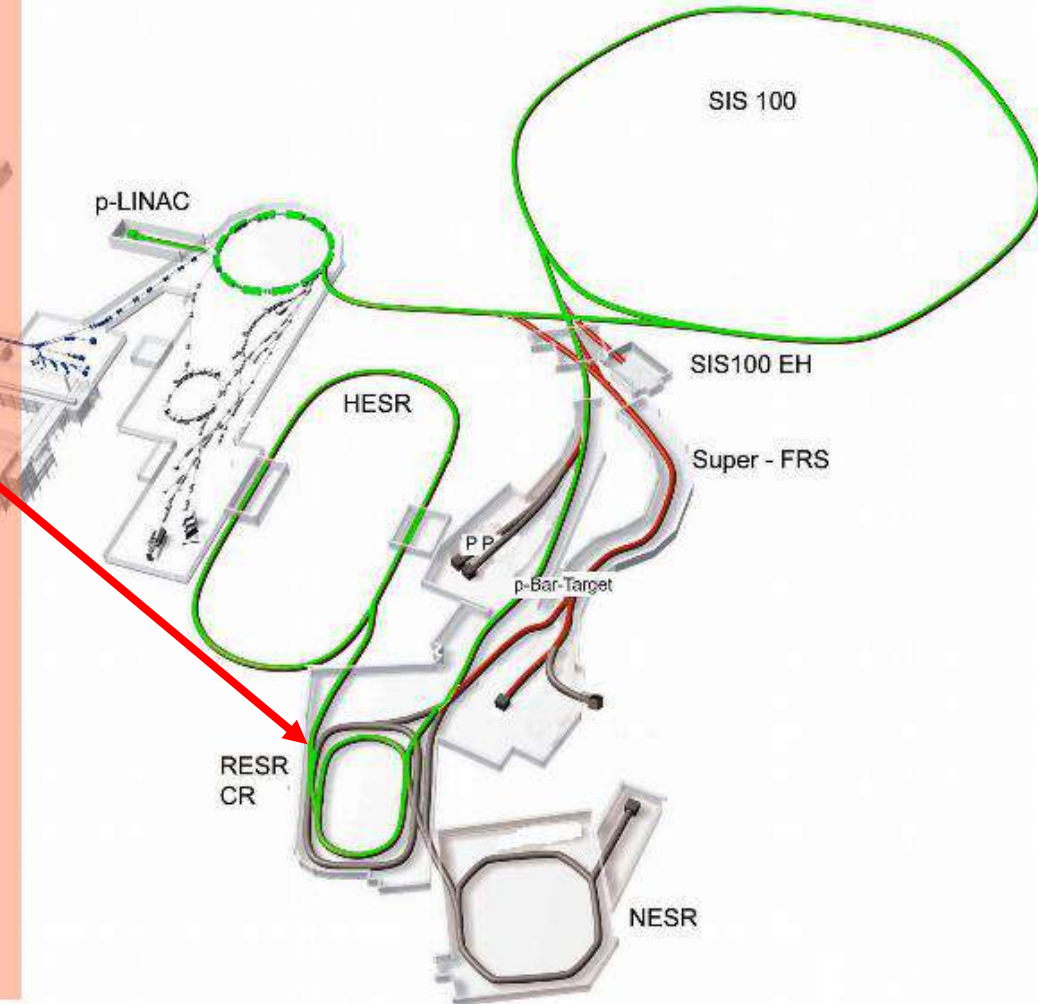


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Cu target
- Collection in CR, fast cooling
- Accumulation in RESR, slow cooling
- Storage in HESR and usage in PANDA

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity

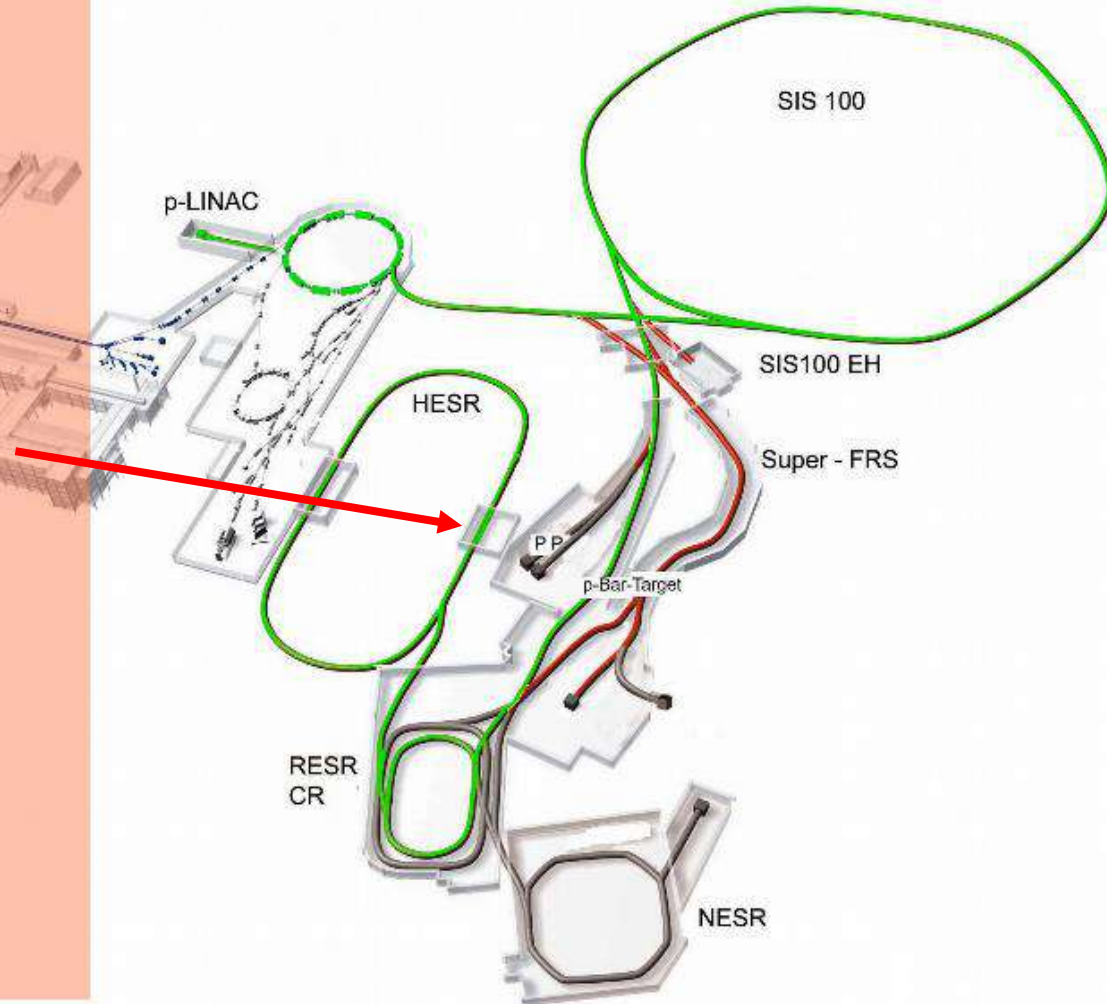


Antiproton production

- Proton Linac 70 MeV
- Accelerate p in SIS18 / 100
- Produce \bar{p} on Ni/Cu target
- Collection in CR, fast cooling
- *Full FAIR*: Accumulation in RESR, slow cooling
- Storage in HESR and usage in \bar{P} ANDA at $< 2 \times 10^{32} \text{ cm}^{-2} \text{ s}^{-1}$

Modularised Start Version

- RESR is postponed (Mod. 4)
- Accumulation in HESR
- 10x lower luminosity: $10^{31} \text{ cm}^{-2} \text{ s}^{-1}$

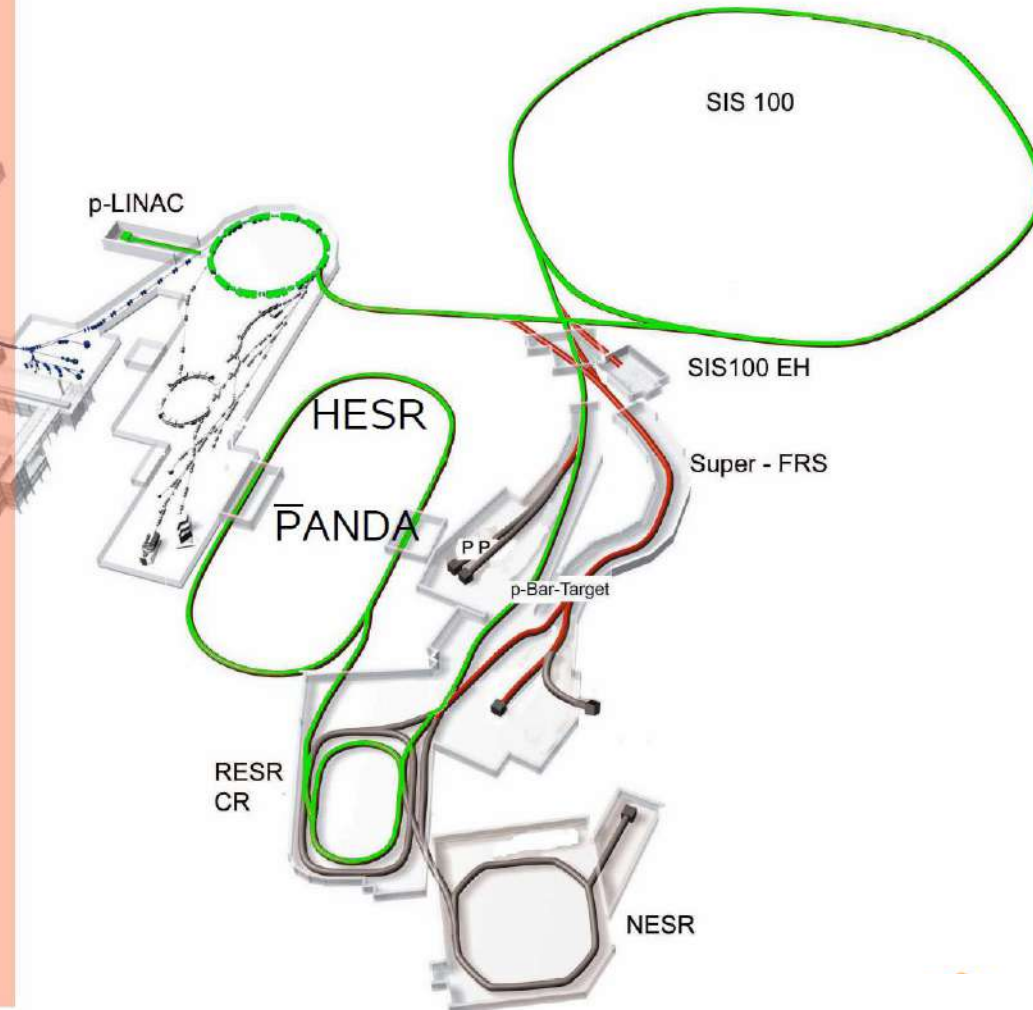


Antiprotons Unique Probes

Antiprotons are unique:

- New dimension at FAIR wrt GSI
- Hadron physics bridges nuclear and HI physics to basic QCD
- No other \bar{p} facility worldwide
- Successful predecessors have demonstrated the large potential

Unique precision at HESR:


- Stochastic beam cooling
 - ➔ $\Delta E \sim 50$ keV
 - ➔ Tune E_{CM} to scan resonances
- Annihilation at threshold

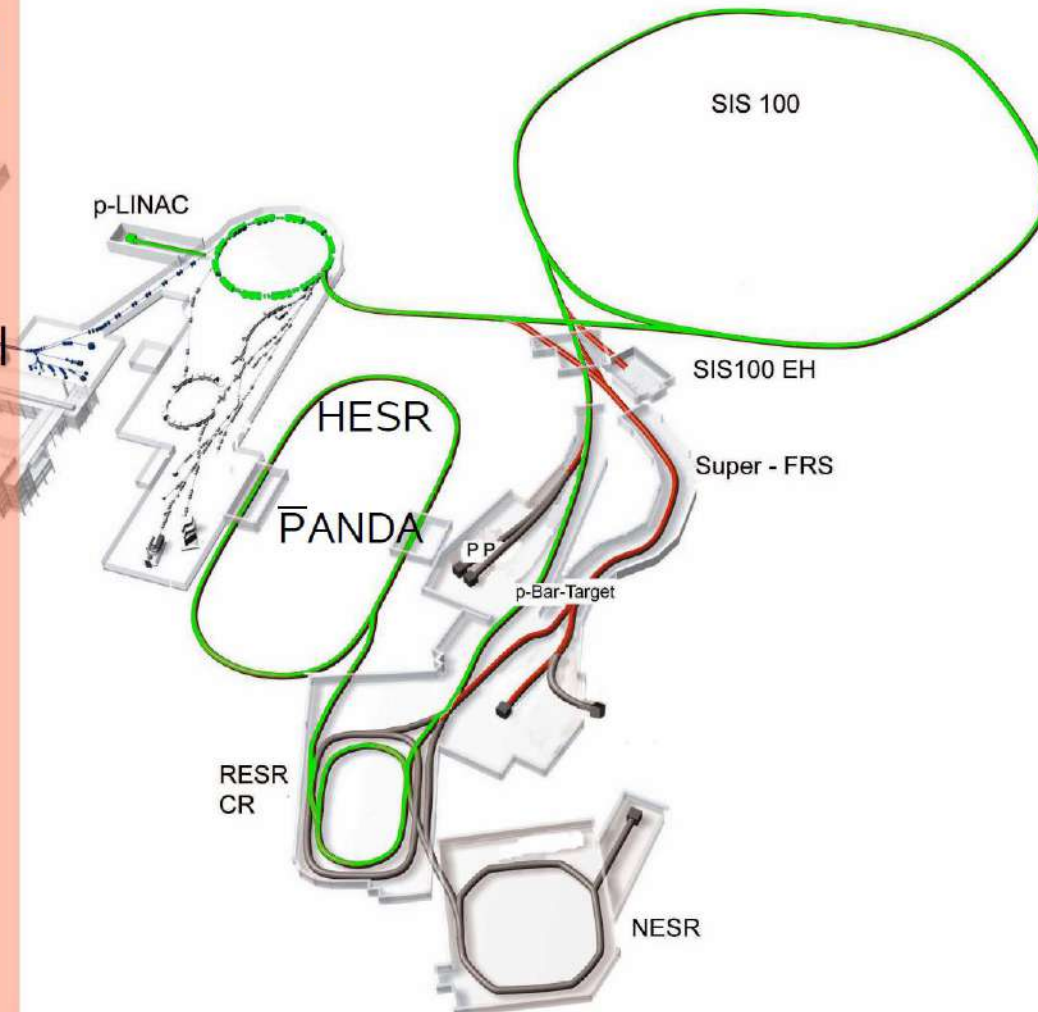

HESR - High Energy Storage Ring


Circumference	575 m
Momentum	1.5 – 15 GeV/c
Electron Cooling	up to 9 GeV/c
Stochastic Cooling	Full range

Mode	High luminosity (HL)	High resolution (HR)
$\Delta p/p$	$\sim 10^{-4}$	$\sim 4 \times 10^{-5}$
$L(\text{cm}^{-2}\text{s}^{-1})$	2×10^{32}	2×10^{31}
Stored \bar{p}	10^{11}	10^{10}

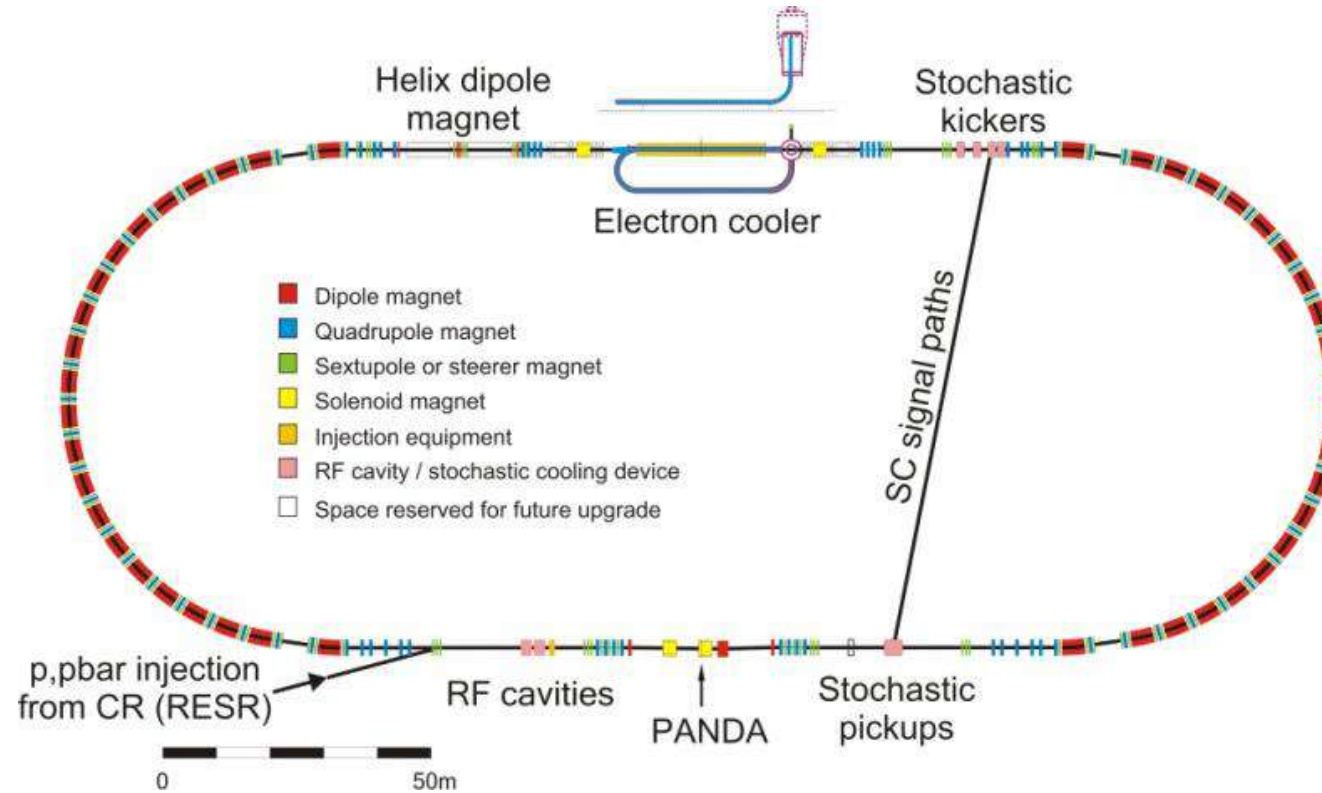


HESR - High Energy Storage Ring

Mode	High luminosity (HL)	High resolution (HR)
$\Delta p/p$	$\sim 10^{-4}$	$\sim 4 \times 10^{-5}$
$L(\text{cm}^{-2}\text{s}^{-1})$	2×10^{32}	2×10^{31}
Stored \bar{p}	10^{11}	10^{10}

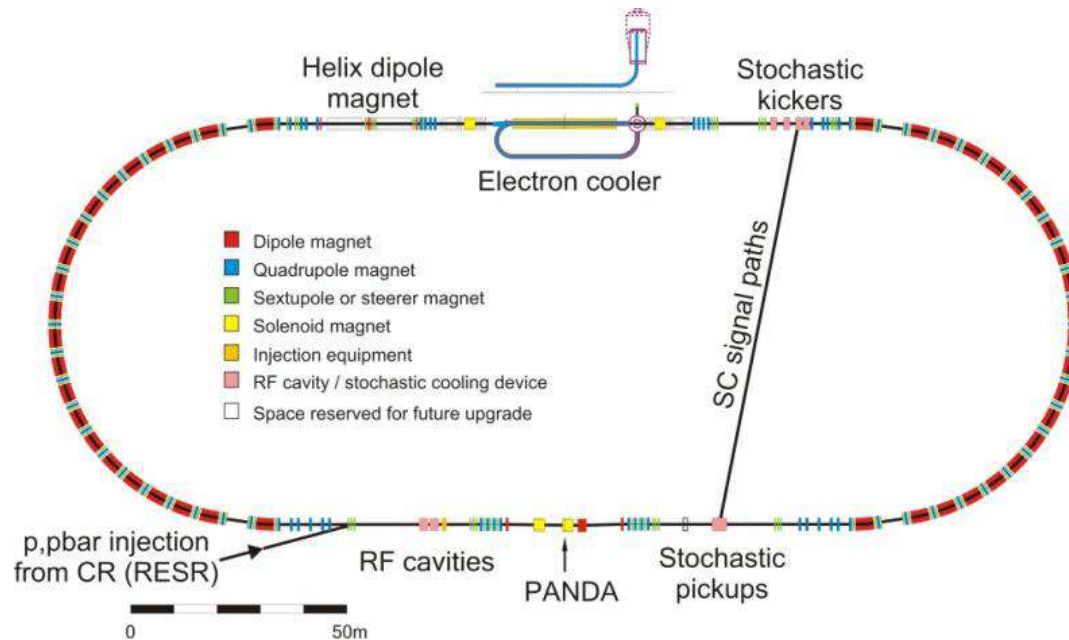

$e^+ e^-$	$p \bar{p}$
Low hadronic background	High hadronic background
Direct production restricted to 1^{--} states	Direct production of various states


Production experiments

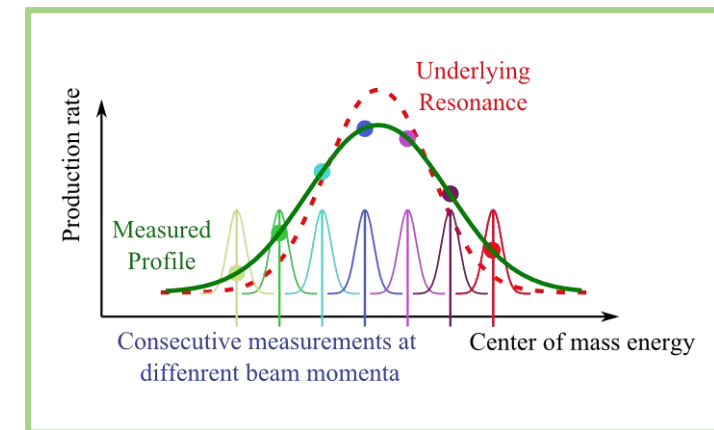



Antiproton annihilation in Darmstadt

Physics Objectives

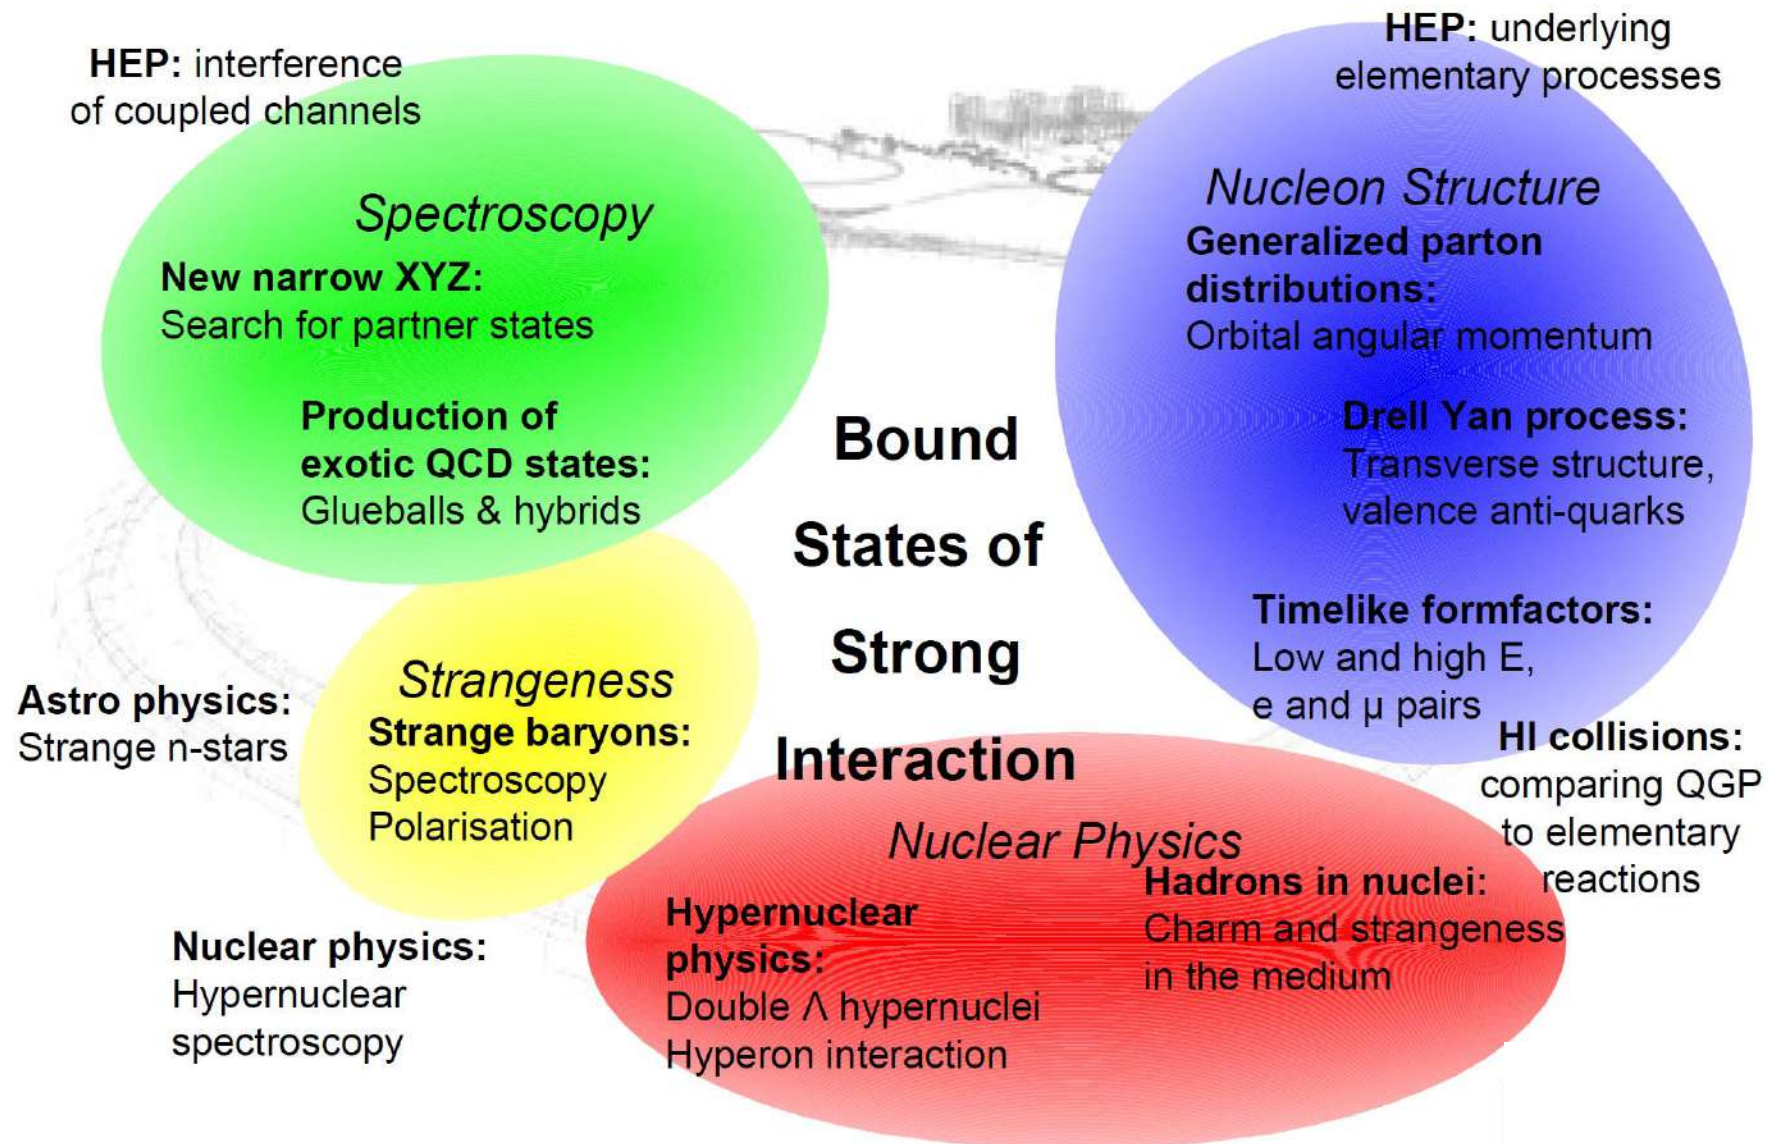

Hadron Spectroscopy

Experimental Goals: mass, width & quantum numbers J^{PC} of resonances

Charm Hadrons: charmonia, D-mesons, charm baryons


→ Understand new XYZ states, $D_s(2317)$ and others

Exotic QCD States: glueballs, hybrids, multi-quarks

Spectroscopy with Antiprotons:

Production of states of all quantum numbers

Resonance scanning with high resolution




Hadron Structure

Time-like Nucleon Formfactors

→ Measurable in annihilation, discrepancy with space-like

Generalized Parton Distributions

Drell-Yan Process




Nuclear Physics


Hypernuclei: Production of double Λ -hypernuclei

→ γ -spectroscopy of hypernuclei, YY interaction

Hadrons in Nuclear Medium



Detector Requirements

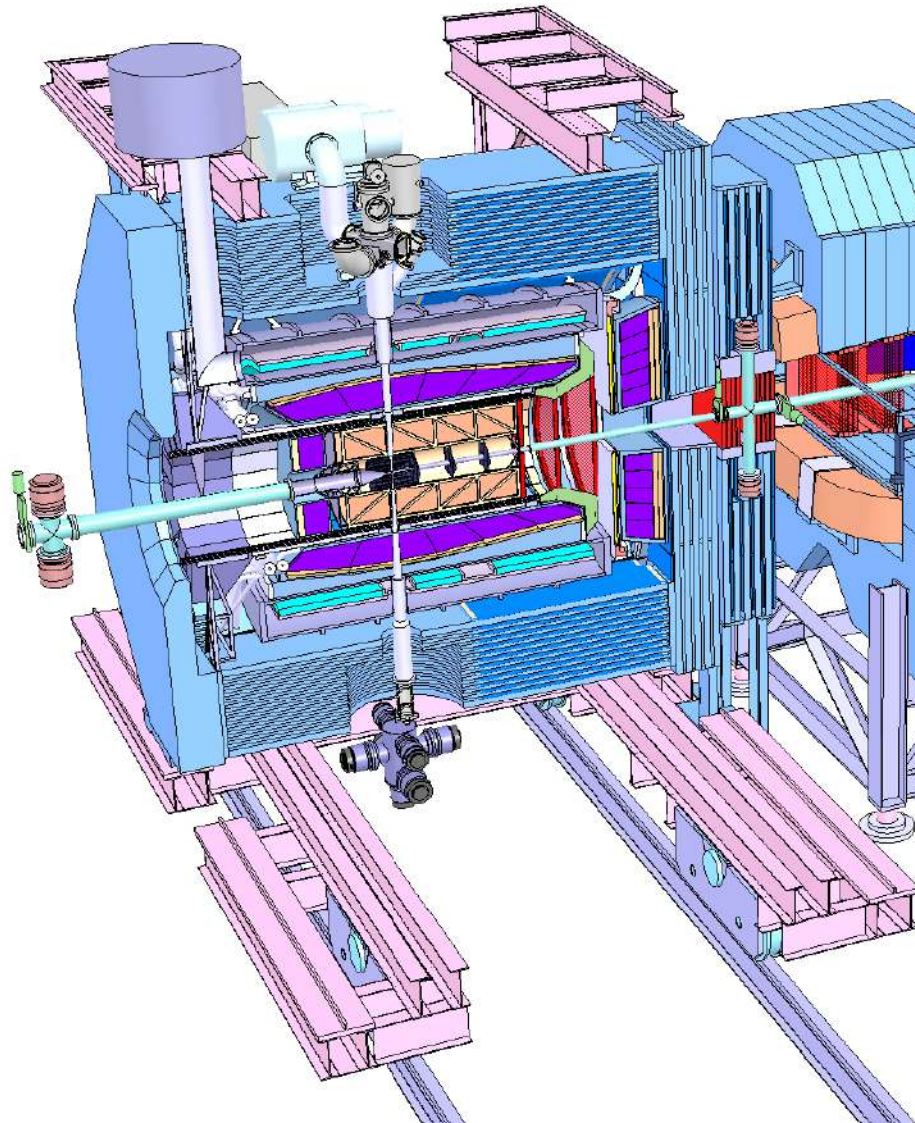

Detector requirements:


- 4π acceptance
- High rate capability:
 $2 \times 10^7 \text{ s}^{-1}$ interactions
- Efficient event selection
- *Continuous acquisition*
- Momentum resolution $\sim 1\%$
- Vertex info for D, K_S^0 , Υ
($c\tau = 317 \text{ }\mu\text{m}$ for D^\pm)
- *Good tracking*
- Good PID (γ , e, μ , π , K, p)
- *Cherenkov, ToF, dE/dx*
- γ -detection 1 MeV – 10 GeV
- *Crystal Calorimeter*

PANDA Detector ...


What we need




The PANDA Detector

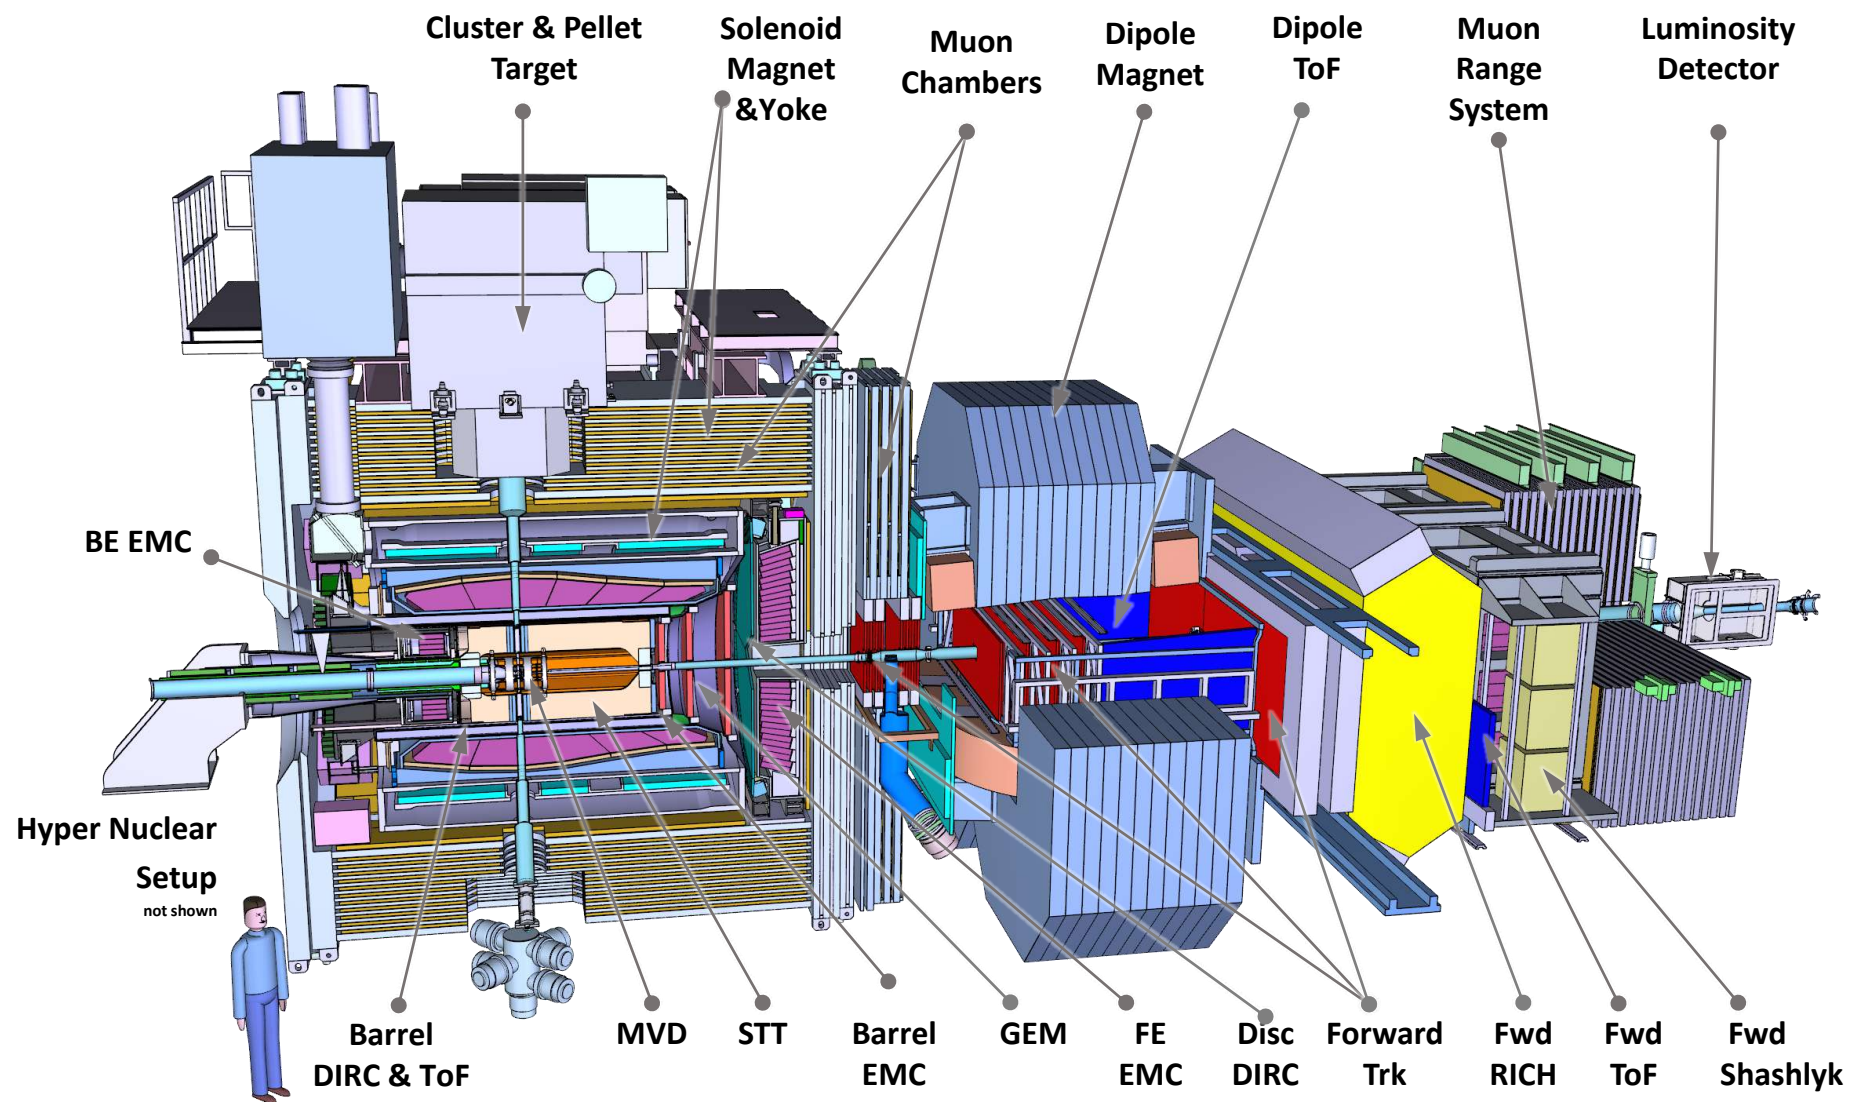

The PANDA Detector

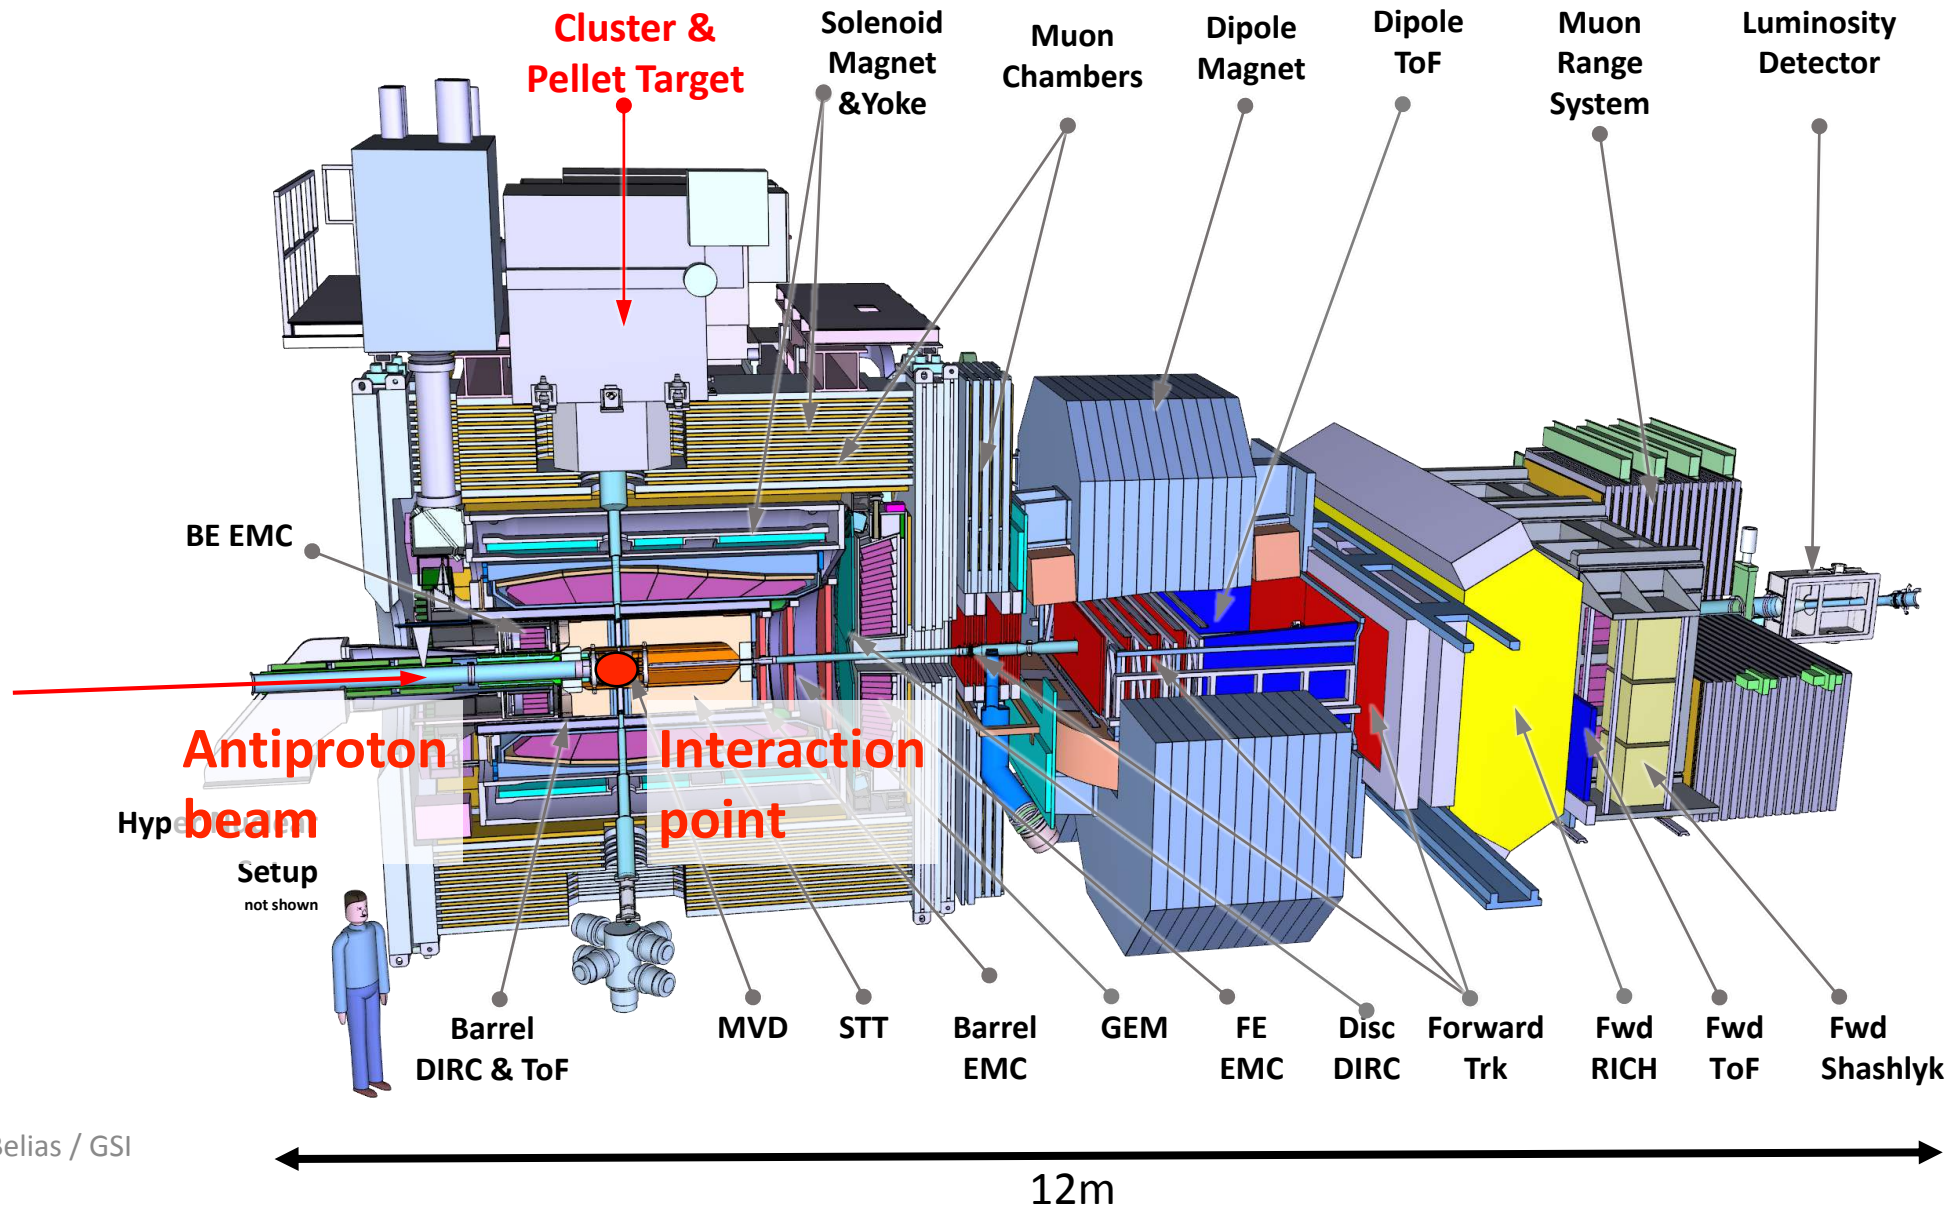

The PANDA Detector

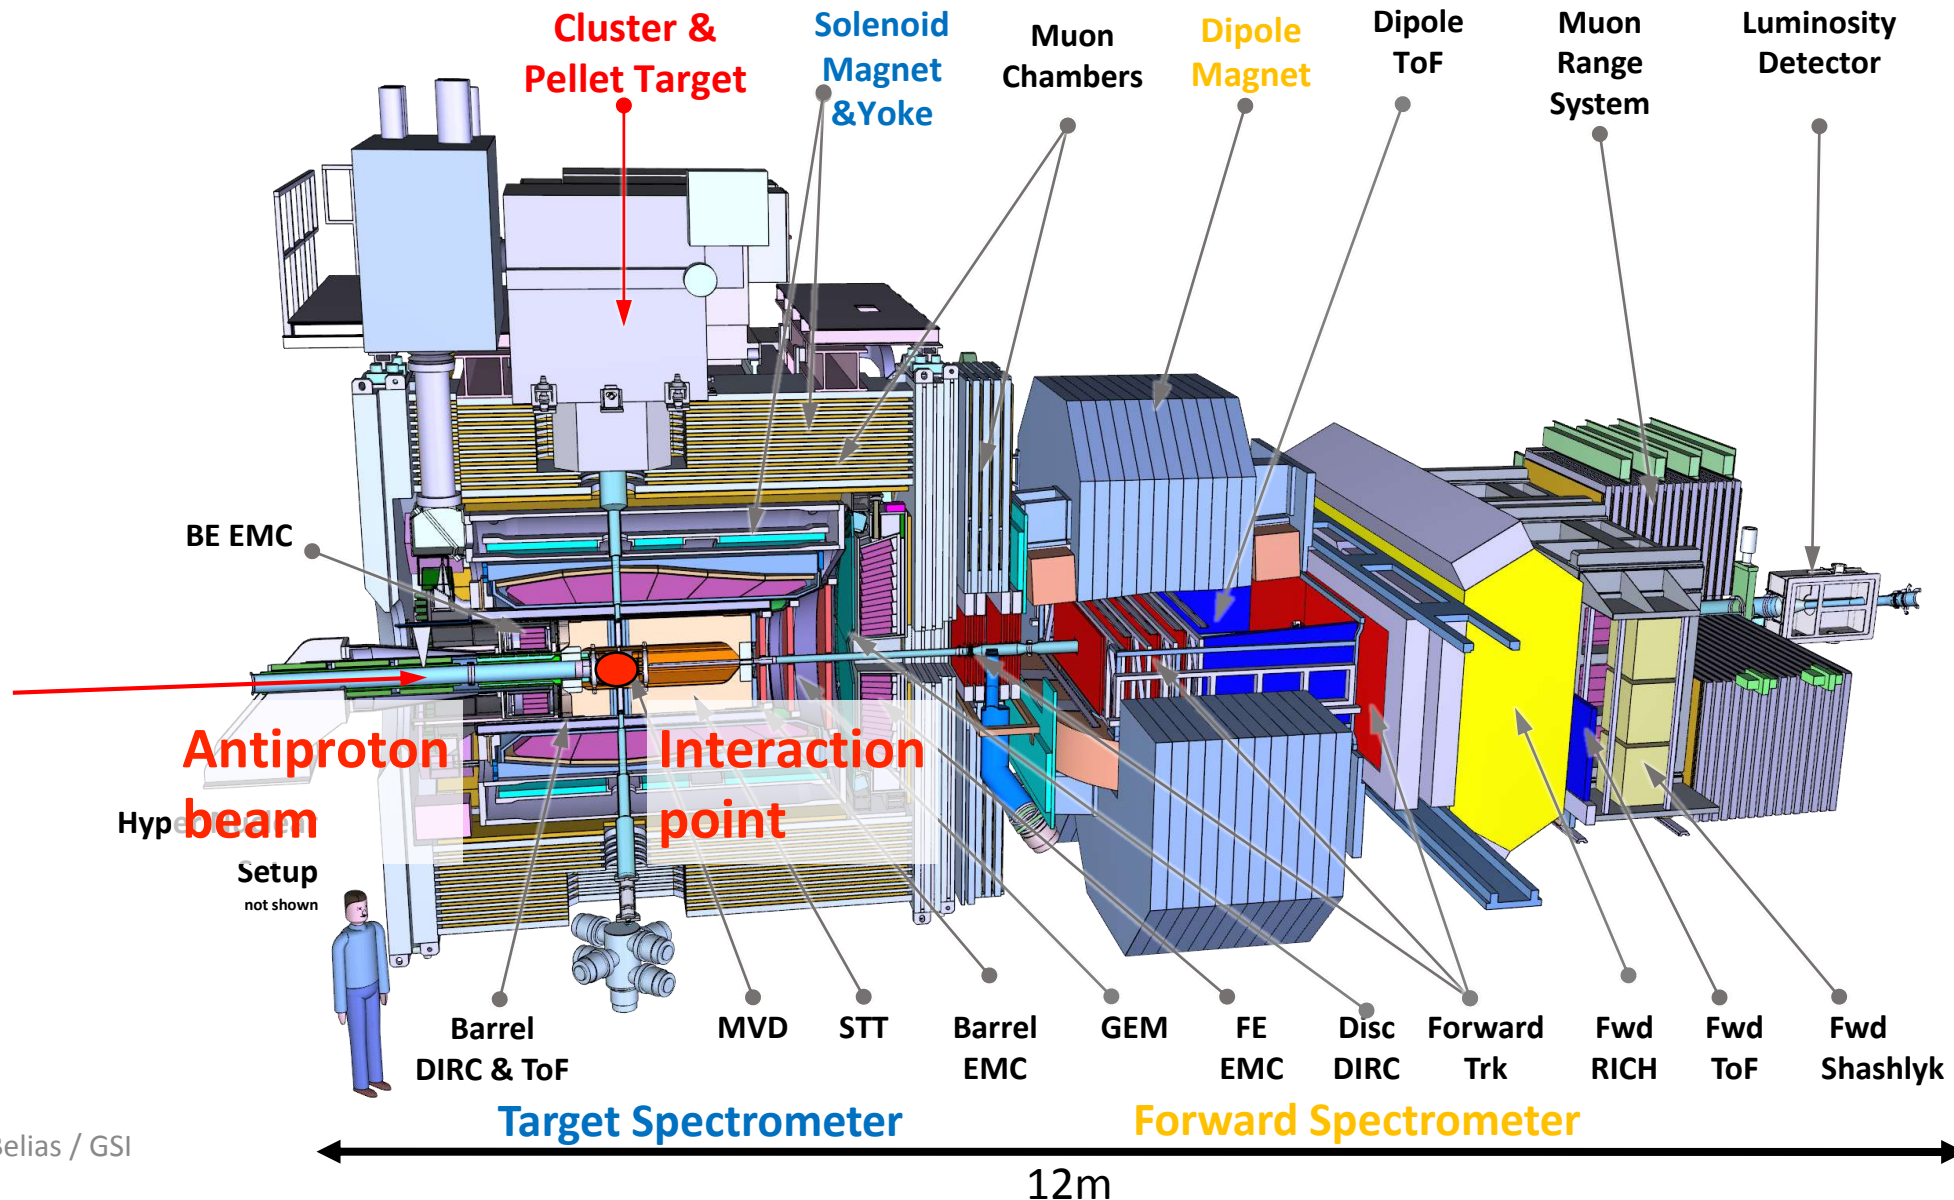

Magnets

Solenoid Magnet

- Super conducting coil, 2 T central field (B_z)
- Segmented coil for target
- Instrumented iron yoke
- Doors laminated, instrumented, retractable

Status


- Design and production contract with BINP started
- Cooperation with CERN for cold mass
- Conductor production development
 - joint venture, BINP and Russian Inst.
- Yoke production started

Dipole Magnet


- Normal conducting racetrack design, 2 Tm
 - Forward tracking detectors partly integrated
 - Dipole also bends the beam
- ➔ HESR component

Status

- Design contract with BINP started

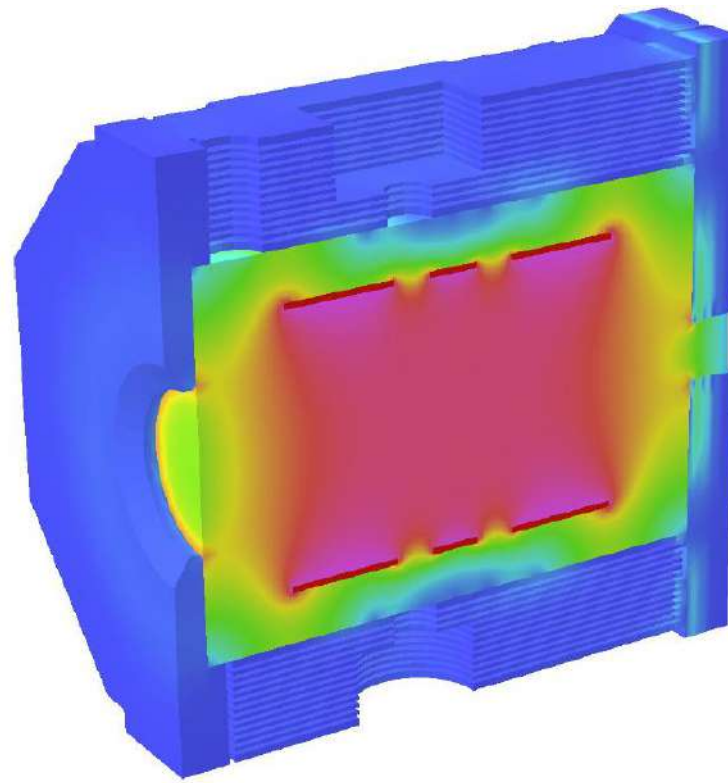

- Inner bore: \varnothing 1.9 m /L: 2.7 m
- Outer yoke: \varnothing 2.3 m /L: 4.9 m
- Total weight: 300 t


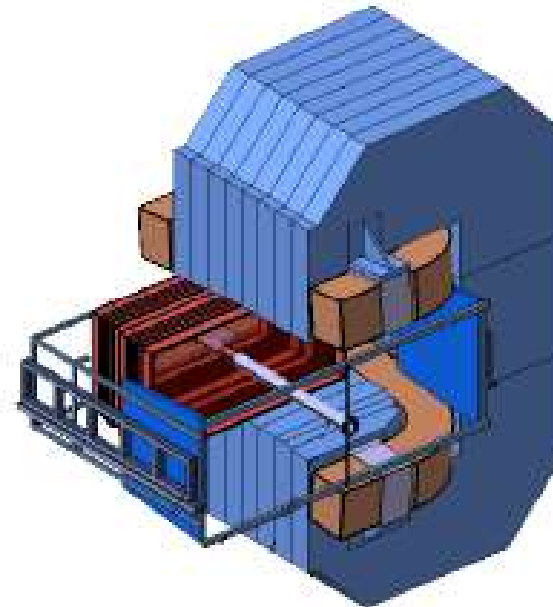


- Vertical acceptance: $\pm 5^\circ$
- Horizontal acceptance: $\pm 10^\circ$
- Total weight: 200 t

Magnet Yoke Octant Production



Interaction region

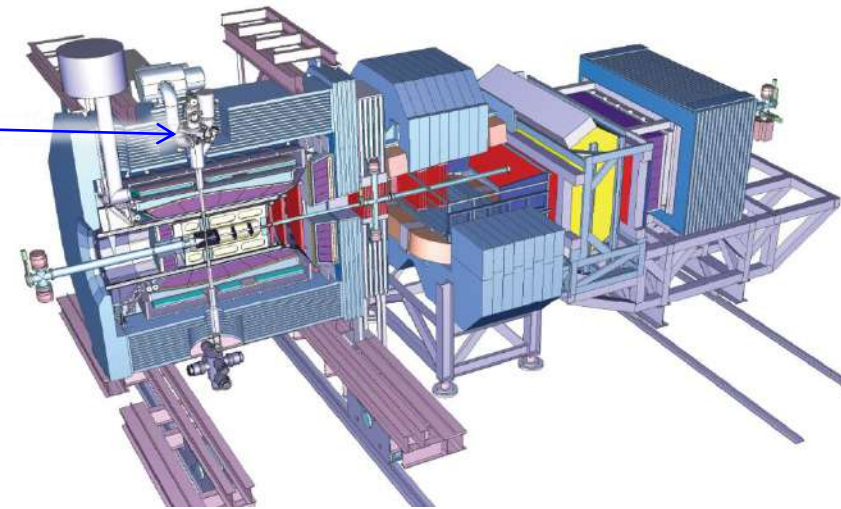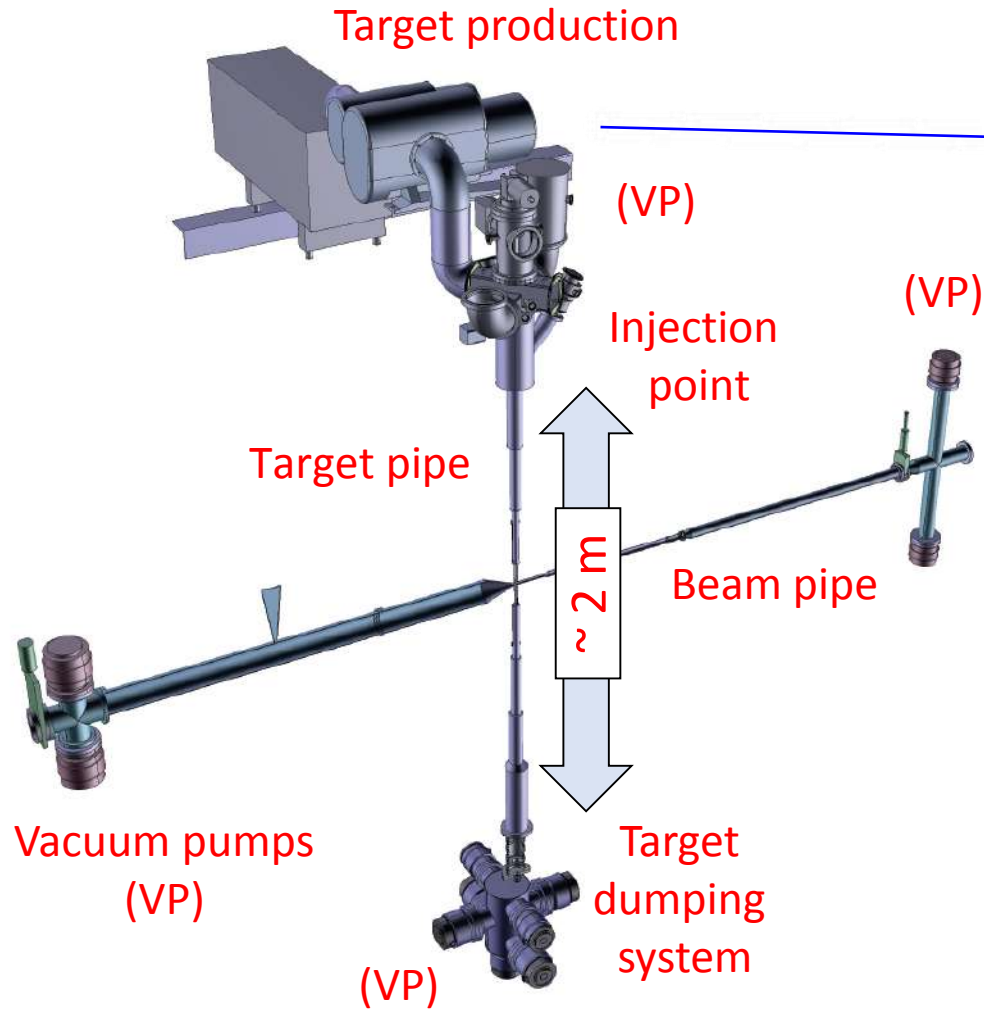

- Vacuum system, pumps, shutters
- Beam pipe, target cross, flanges
- Interfaces with detectors, target
- Support for pipe, MVD services
- Mounted on central space frame


PANDA Targets

Luminosity Considerations

- Goal: $2 \times 10^{32} \text{ cm}^{-2} \text{ s}^{-1}$ for HL mode
- With $10^{11} \bar{p}$ stored and 50 mb cross section:
→ $4 \times 10^{15} \text{ cm}^{-2}$ target density
- 1 μm gold foil has about $5.9 \times 10^{18} \text{ cm}^{-2}$



Cluster Jet Target

- TDR approved by FAIR ECE
- Record of $2 \times 10^{15} \text{ cm}^{-2}$ already achieved
- Continuous development
 - Nozzle improvement
 - Better alignment by tilting device

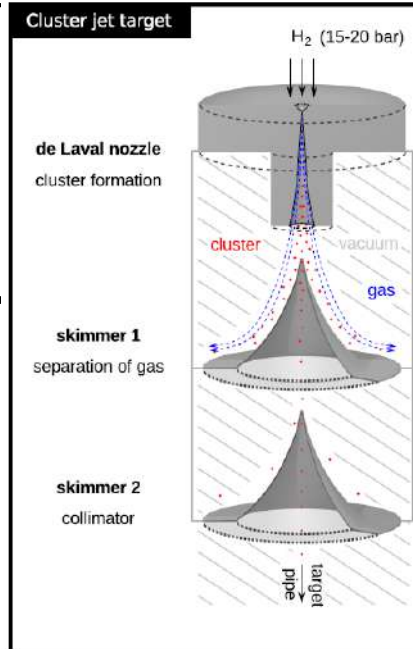


Pellet Target

- $> 4 \times 10^{15} \text{ cm}^{-2}$ feasible
- Prototype under way
- Pellet tracking prototype
- Towards TDR

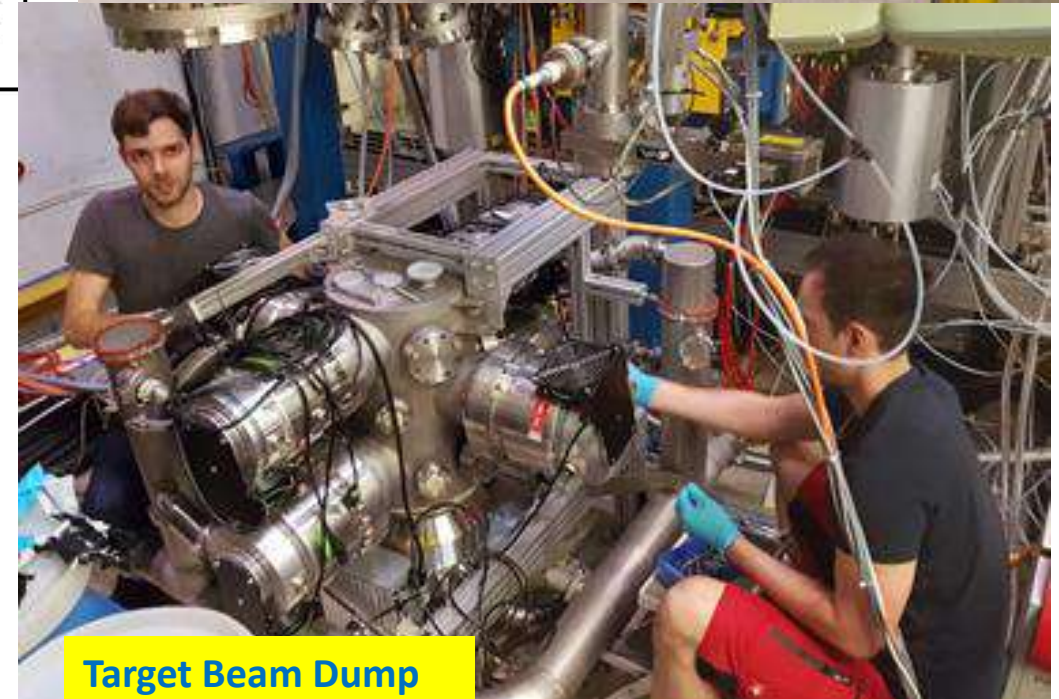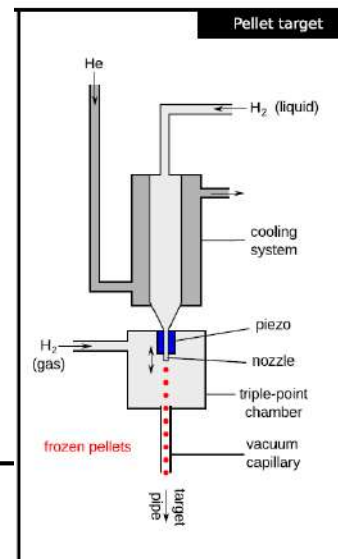

The PANDA Detector - Tracking

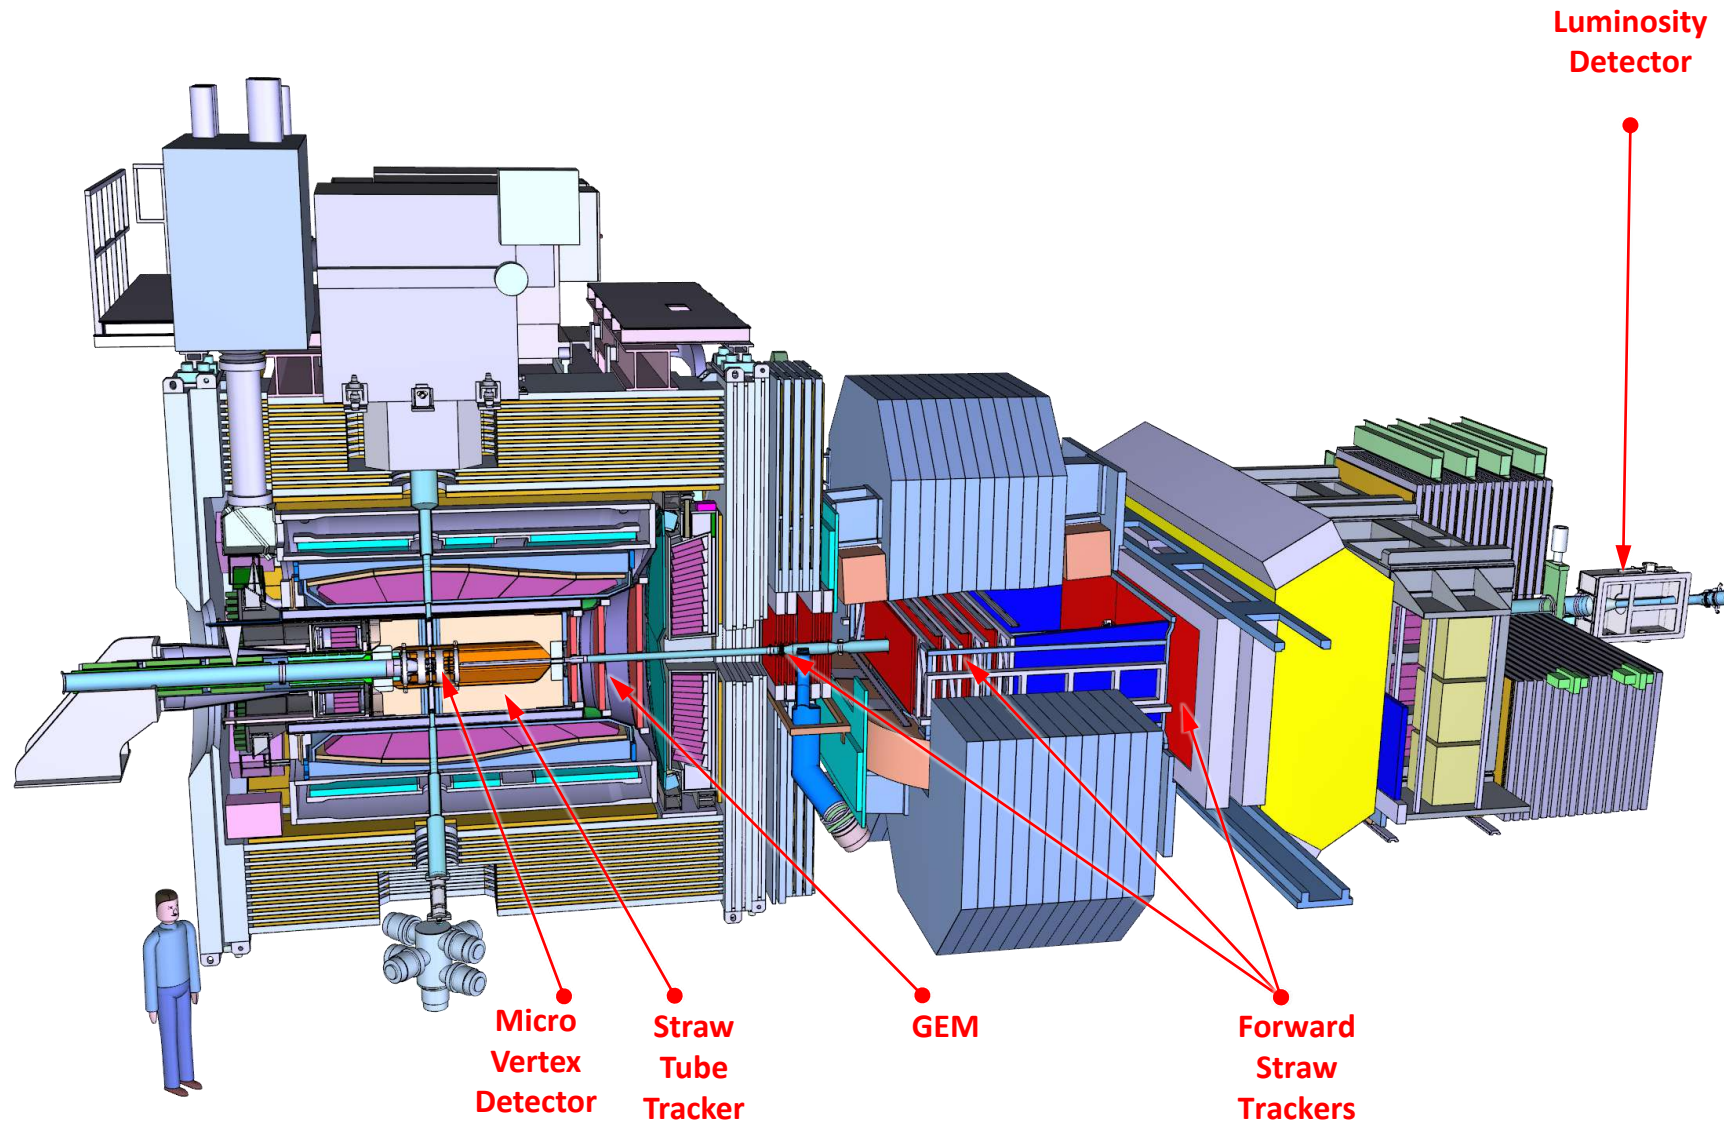

Micro Vertex Detector

Detector Layout





- Silicon Pixels and Strip detector
- 4 barrels and 6 disks
- Hybrid pixels ($100 \times 100 \mu\text{m}^2$)
 - Radout ASIC ToPiX
 - Thinned sensor wafers
- Double sided strips
 - Rectangles and trapezoids
 - Readout ASIC PASTA
- Mixed forward disks (pixels/strips)
- $50 \mu\text{m}$ vertex resolution, $\delta p/p \sim 2\%$

Challenges

- Low mass supports
- Cooling in small volume
- Radiation tolerance $\sim 10^{14} \text{ nMeV eq cm}^{-2}$

Status

- TDR approved by FAIR ECE
- ASIC prototypes tests & adaptation
- Radiation tolerant links from CERN
 - GBTx, Versatile Link and DC/DC
- Detailed service planning

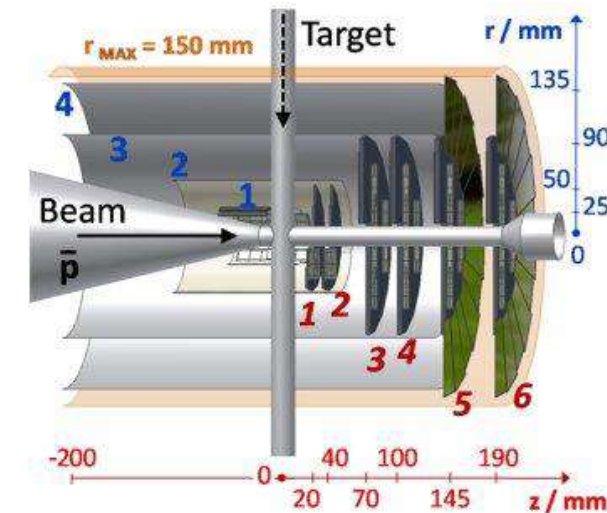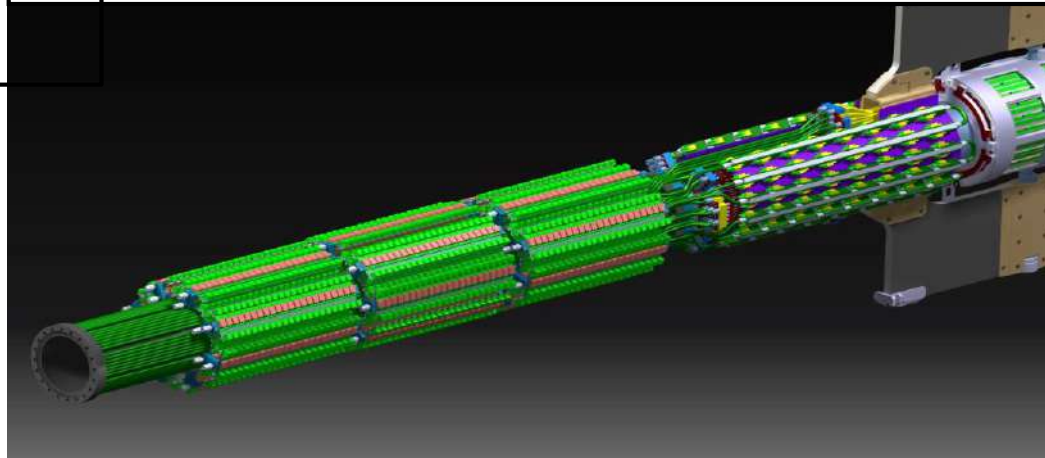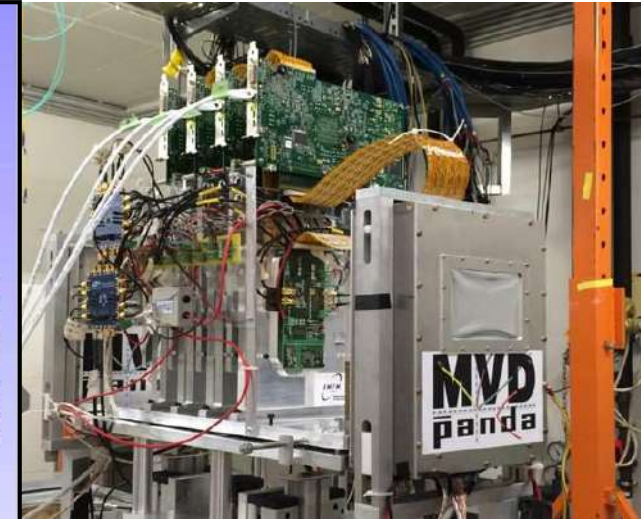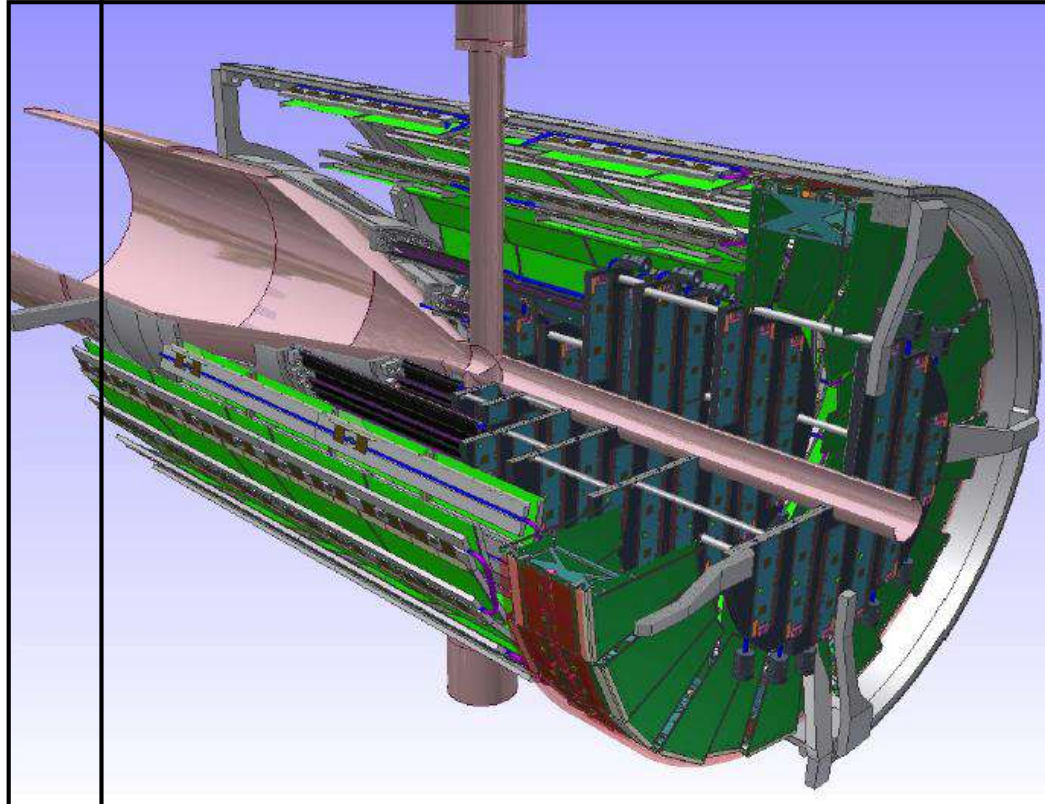

Straw Tube Tracker

Detector Layout



- Layers of drift tubes
- $R_{in} = 150 \text{ mm}$, $R_{out} = 420 \text{ mm}$, $l = 1500 \text{ mm}$
- Tube made of $27 \mu\text{m}$ thin Al-mylar, $\varnothing = 1 \text{ cm}$
- 4600 straws in 21-27 layers, of which 8 layers skewed at 3°
- **Self-supporting straw double layers at $\sim 1 \text{ bar}$ overpressure (Ar/CO₂) developed at FZ Jülich**
- Resolution: $r, \phi \sim 150 \mu\text{m}$, $z \sim 1 \text{ mm}$

Material Budget

- 0.05% X/X₀ per layer
- **Total 1.3% X/X₀**

Status

- TDR approved by FAIR ECE
- Readout prototypes & beam tests
- Ageing tests: up to 1.2 C/cm^2
- Straw series production almost completed

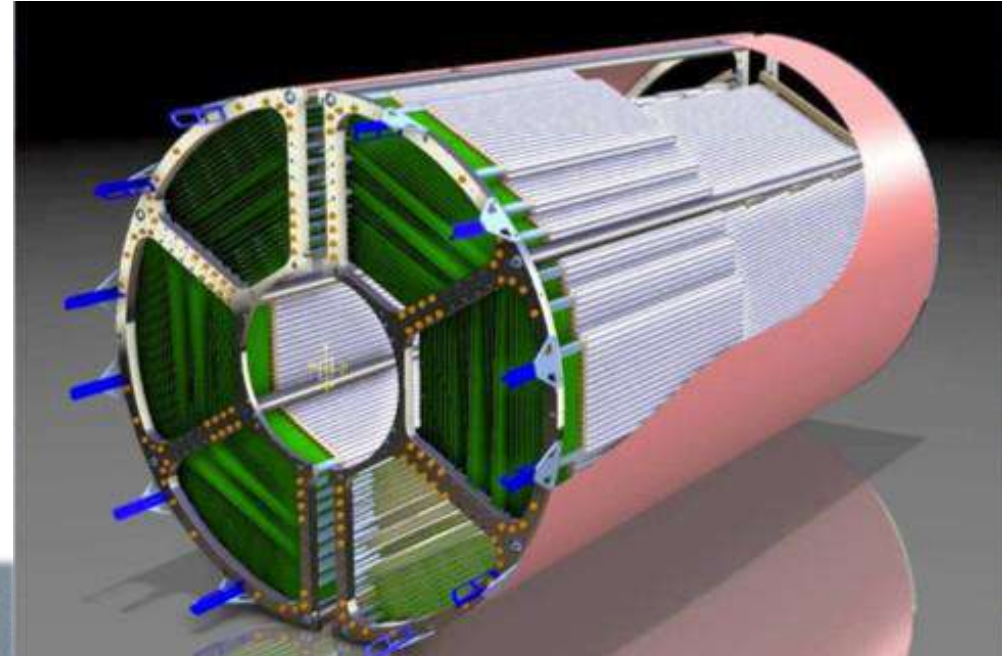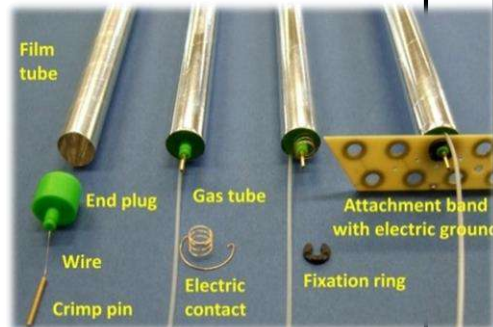

Straw Tube Tracker Developments

Mechanics status

- Modules assembly scheme
- Prototype frame installed

Electronics Candidates





- ASIC PASTTREC and TDC-FPGA
 - time and ToT
 - fully qualified, 70% PID quality
- Sampling FADC
 - time and pulse area
 - tested in beam, further cosmic tests
- Start with ASIC and TDC-FPGA
 - later upgrades for High Luminosity runs

Testbeam campaigns 2018/2019

- Characterize further readout, PID tests
- Optimize operational parameters

Full Straw Tube Prototypes in HADES at GSI
2019: Installation – 2020: Data Taking

A. Bellas / GSI

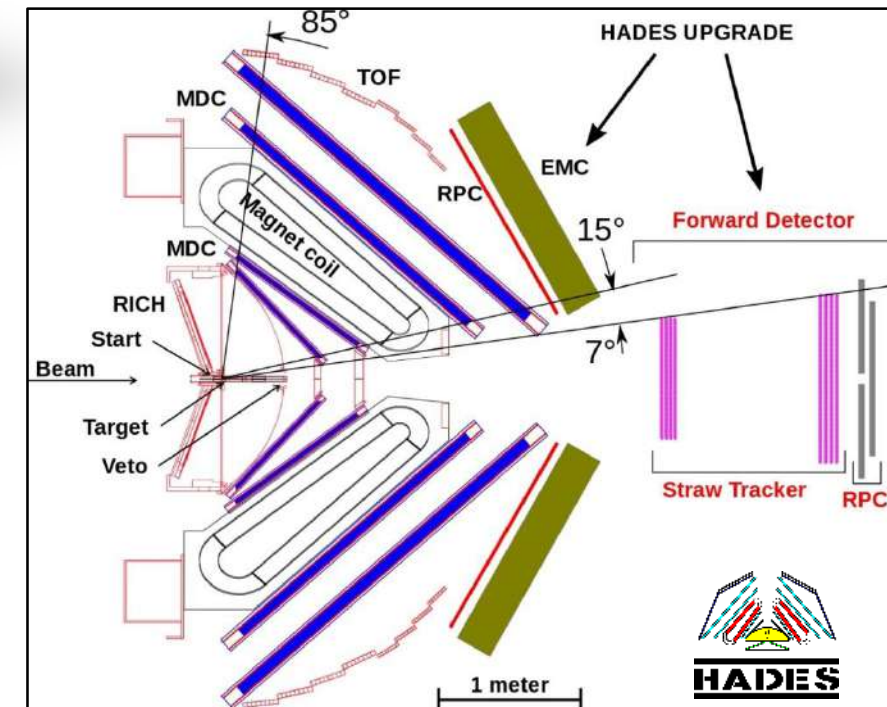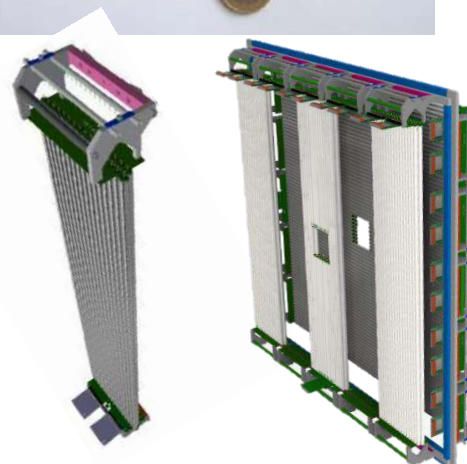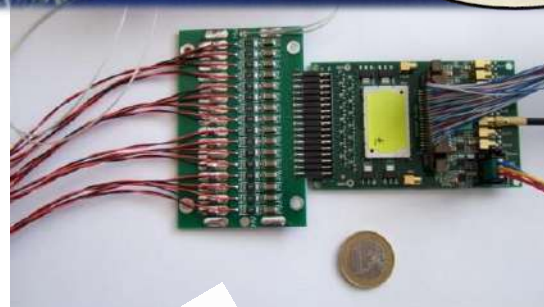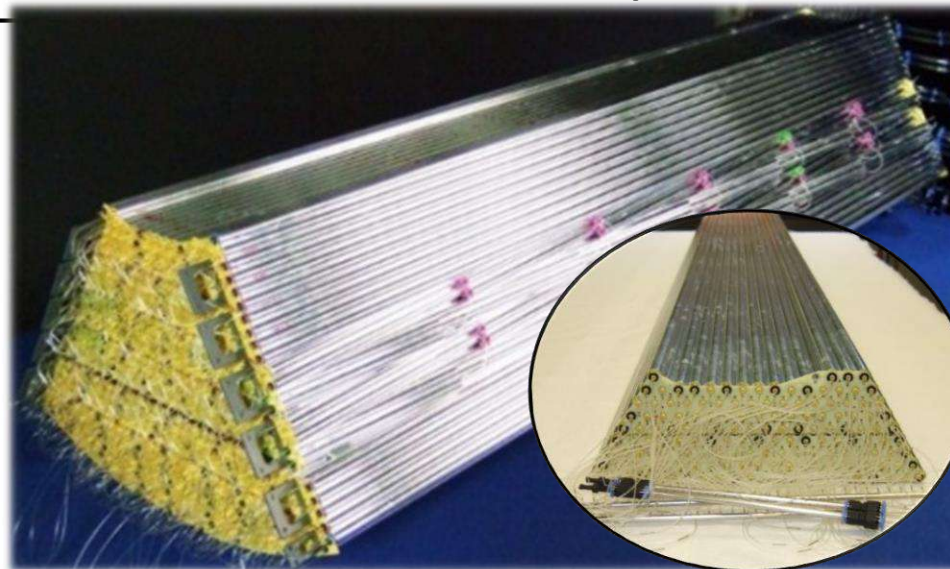

GEM Tracker

Forward Tracking inside Solenoid

- Tracking in high occupancy region
- Important for large parts of physics






Detector design

- 3 stations with 4 projections each
→ Radial, concentric, x, y
- Central readout plane for 2 GEM stacks
- Large area GEM foils developed at CERN
(50 μ m Kapton, 2-5 μ m copper coating)
- ADC readout for cluster centroids
→ Approx. 35000 channels total
- Challenge to minimize material

Status

- Advanced mechanical concept
- Demonstrator construction ongoing,
- GEM foils from TECTRA delays
- Available electronics unstable
→ **Other readout electronics required**

A. Belias / GSI

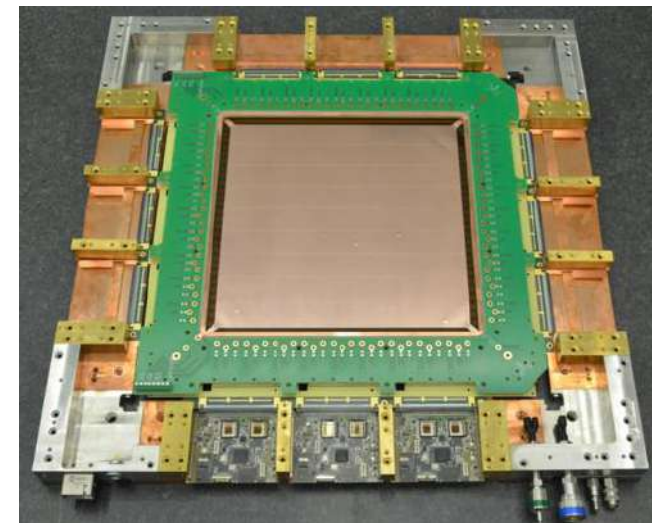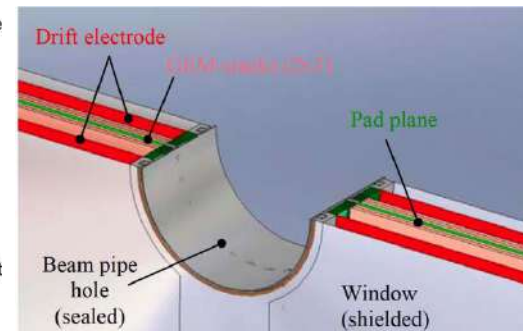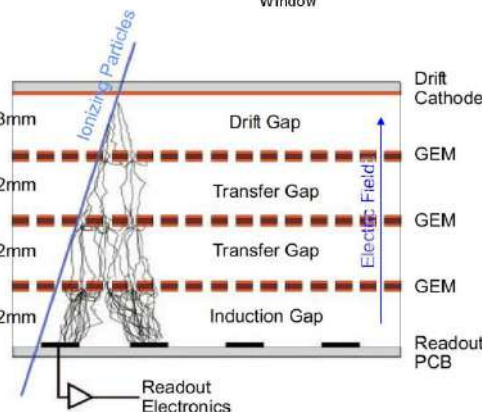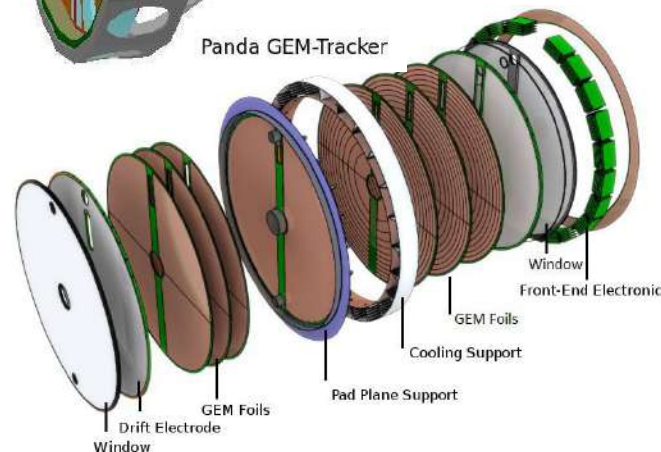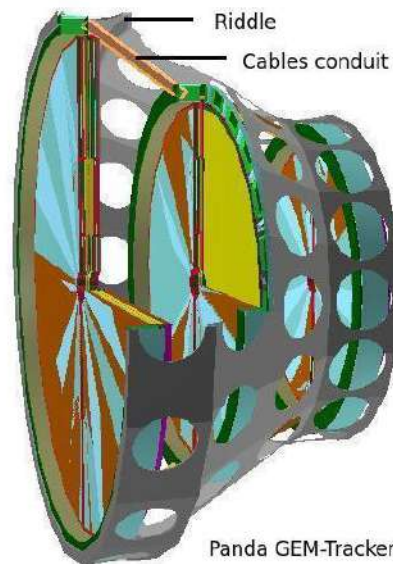

2D Demonstrator

Challenges - Opportunities:

- Completion of demonstrator
- Characterization of GEM foils
- **Readout electronics**
- Full size prototype design
- Lack of manpower
→ need expert groups

Forward Tracker




Tracking in Forward Spectrometer

- Straw tubes, same as in STT (Barrel), vertically arranged in double layers
- 3 stations with 2 chambers each
 - FT1&2 : between solenoid and dipole
 - FT3&4 : in the dipole gap
 - FT5&6 : large chambers behind dipole
- 4 projections $0^\circ / \pm 5^\circ / 0^\circ$ per chamber
- Readout ASIC PASTTREC and TDC-FPGA
 - later upgrades for High Luminosity runs

Status

- TDR approved by FAIR ECE
- Testbeam campaigns 2018/2019
- Ongoing stereoscopic scans
- Aging tests: up to 1 C/cm^2

Full Straw Tube Prototypes in HADES at GSI
2019: Installation – 2020: Data Taking

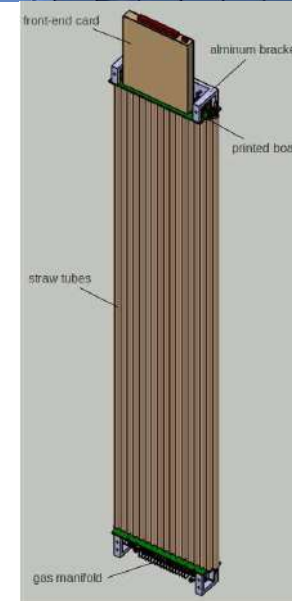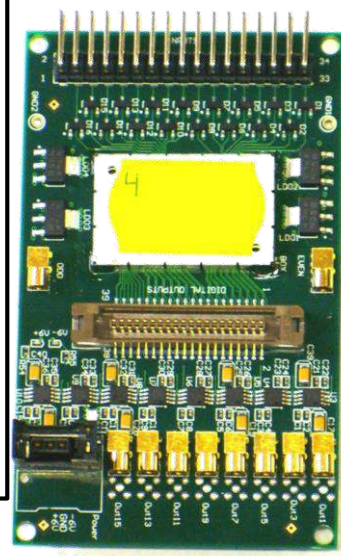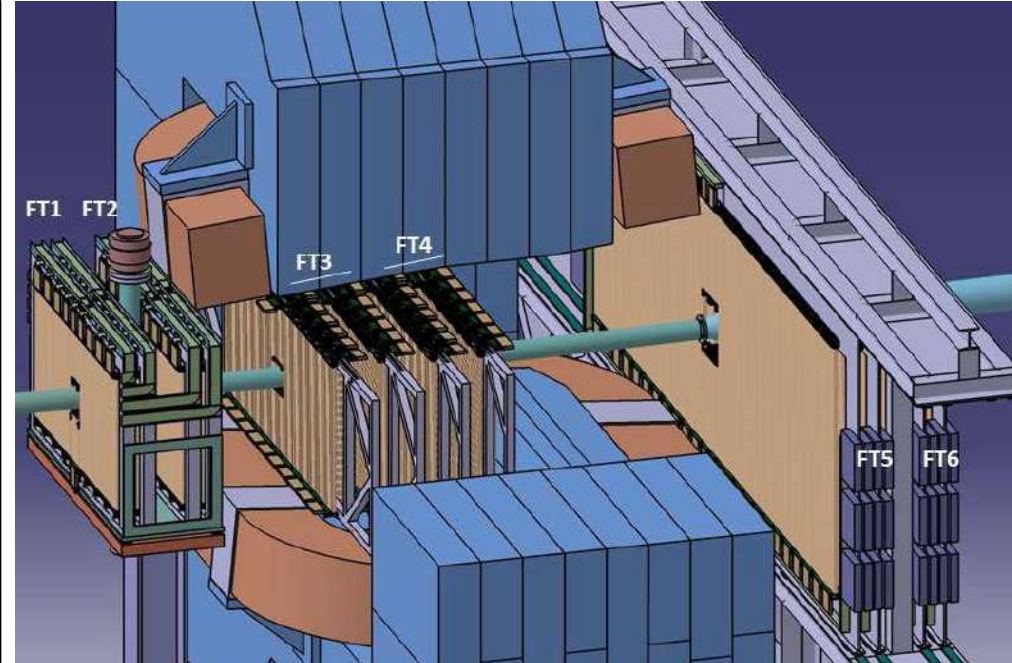

Outer Tracker of LHCb in PANDA

The proposed idea:


- LHCb replaces its outer tracker with scintillating fibres for high intensity
- Short modules 2.4m, 20% of all
PANDA could use these modules

Conceptual layout:

- Using all short modules inc. spares:
→ cover 4m with 2x4 planes
- Somewhat larger hole around beampipe
- Radiation length 2x higher than PANDA

Project assessment status:

- Spares can be delivered to GSI
- Active planes need to cool down
- Electronics: interface to TRB needed
- Mechanics: proposal for Thailand

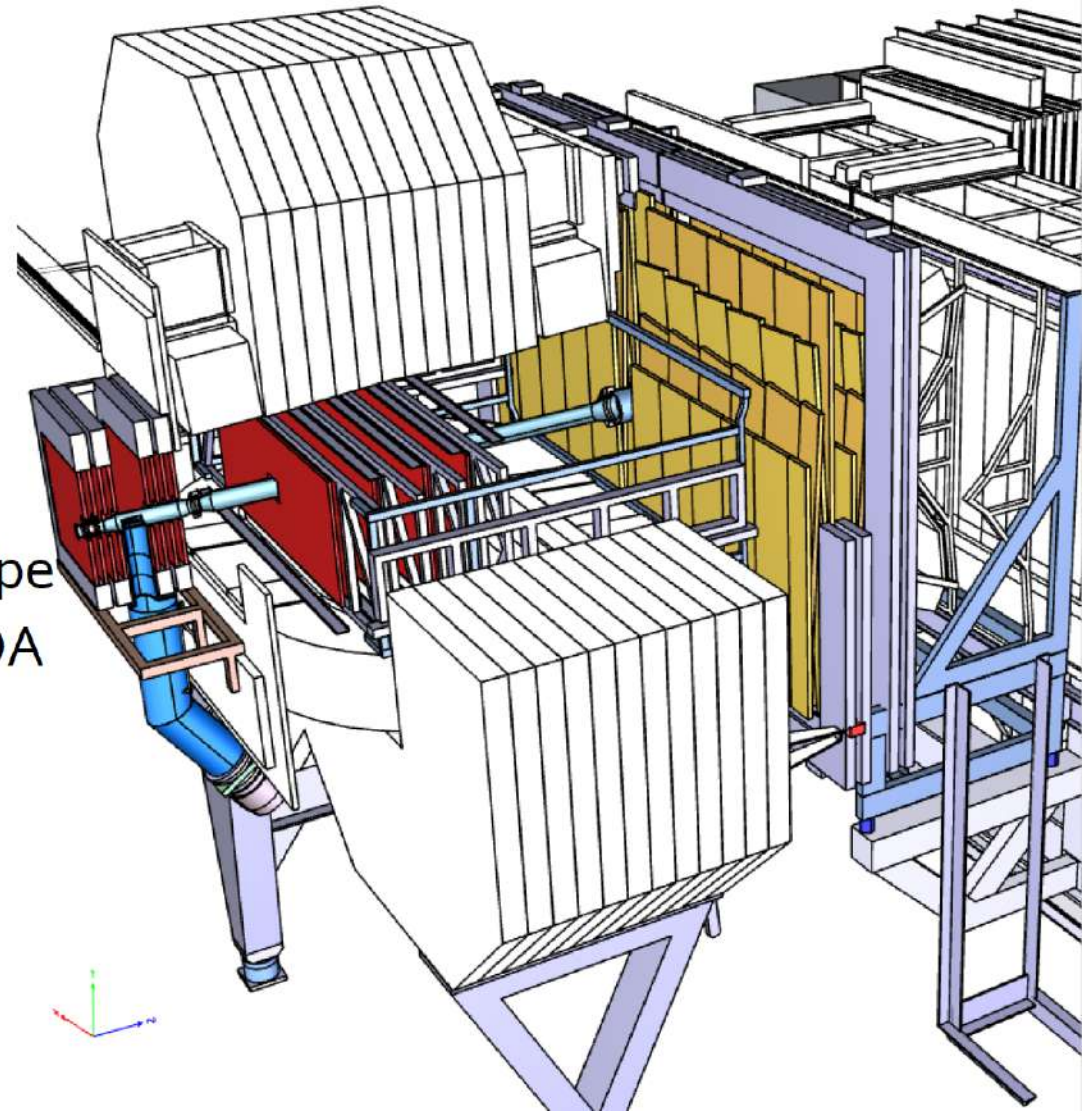

Luminosity Detector

Elastic scattering:

- Coulomb part calculable
- Scattering of \bar{p} at low t
- Precision tracking of scattered \bar{p}
- Acceptance 3-8 mrad

Detector layout:






- Roman pot system at $z=11$ m
- Silicon pixels ($80 \times 80 \mu\text{m}^2$):
 - 4 layers of HV MAPS ($50 \mu\text{m}$ thick)
- CVD diamond supports ($200 \mu\text{m}$)
- Retractable half planes in sec. vacuum

HV MAPS:


- Development for Mu3e Experiment at PSI
- Active pixel sensor in HV CMOS
 - faster and more rad. hard
- Digital processing on chip

Status:

- TDR submitted to FAIR ECE
- Mechanical vessel, cooling, vacuum, design ready
- New MuPix prototype $1 \times 2 \text{ cm}^2$ in test
- FPGA readout tests

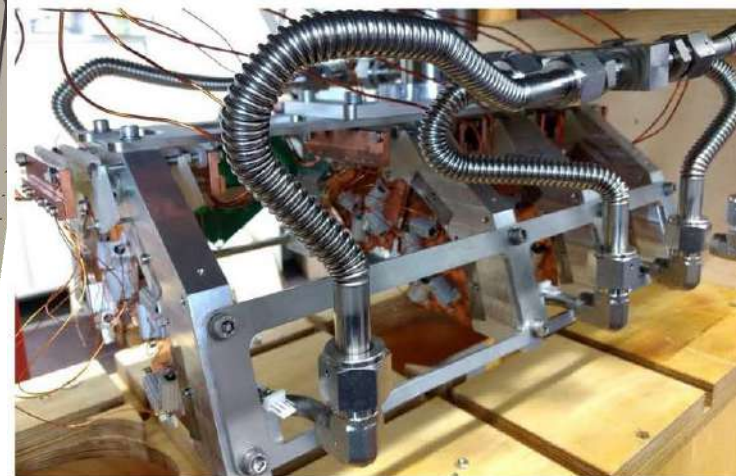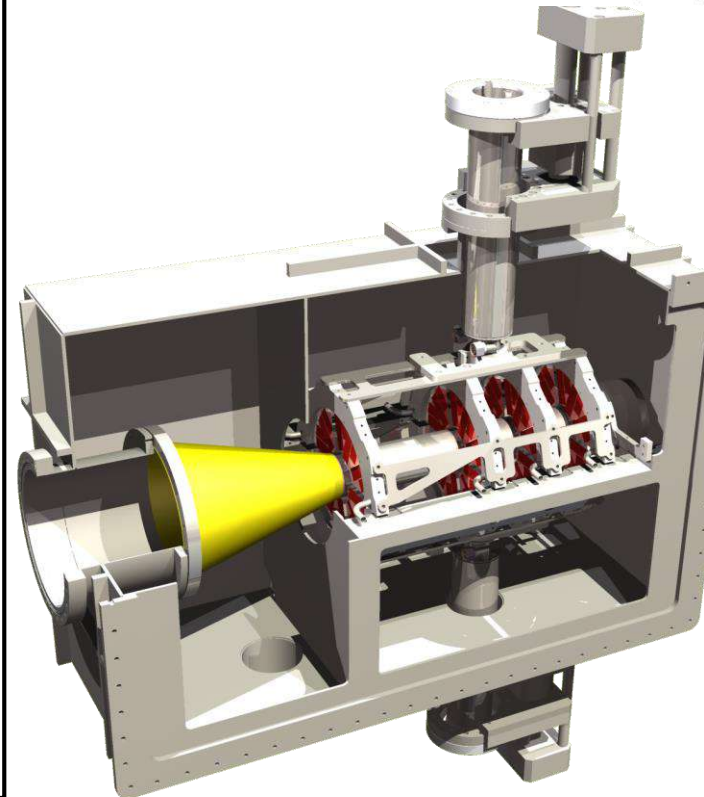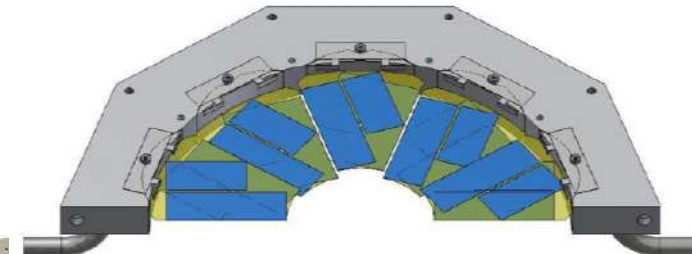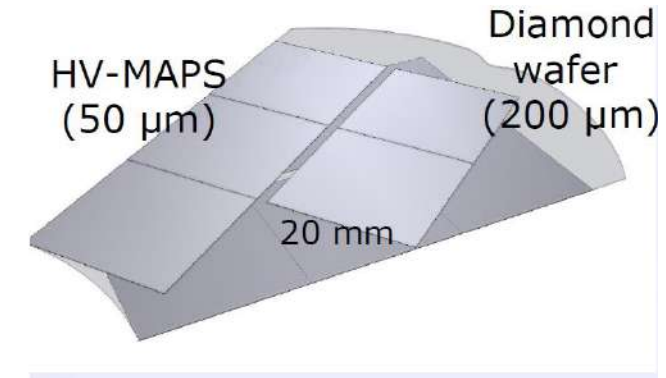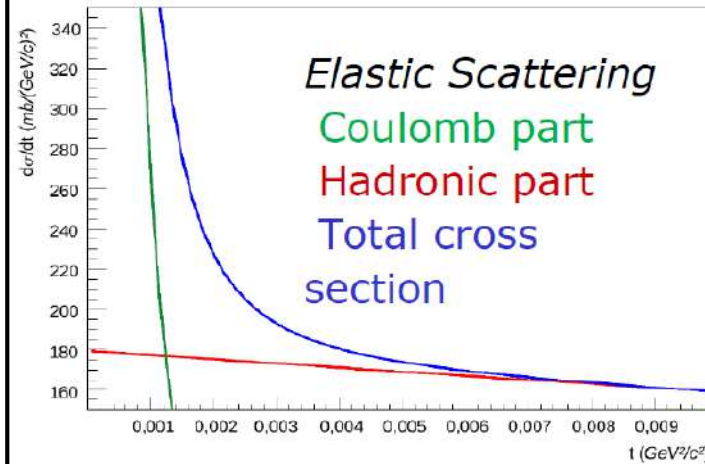

The PANDA Detector - Calorimetry

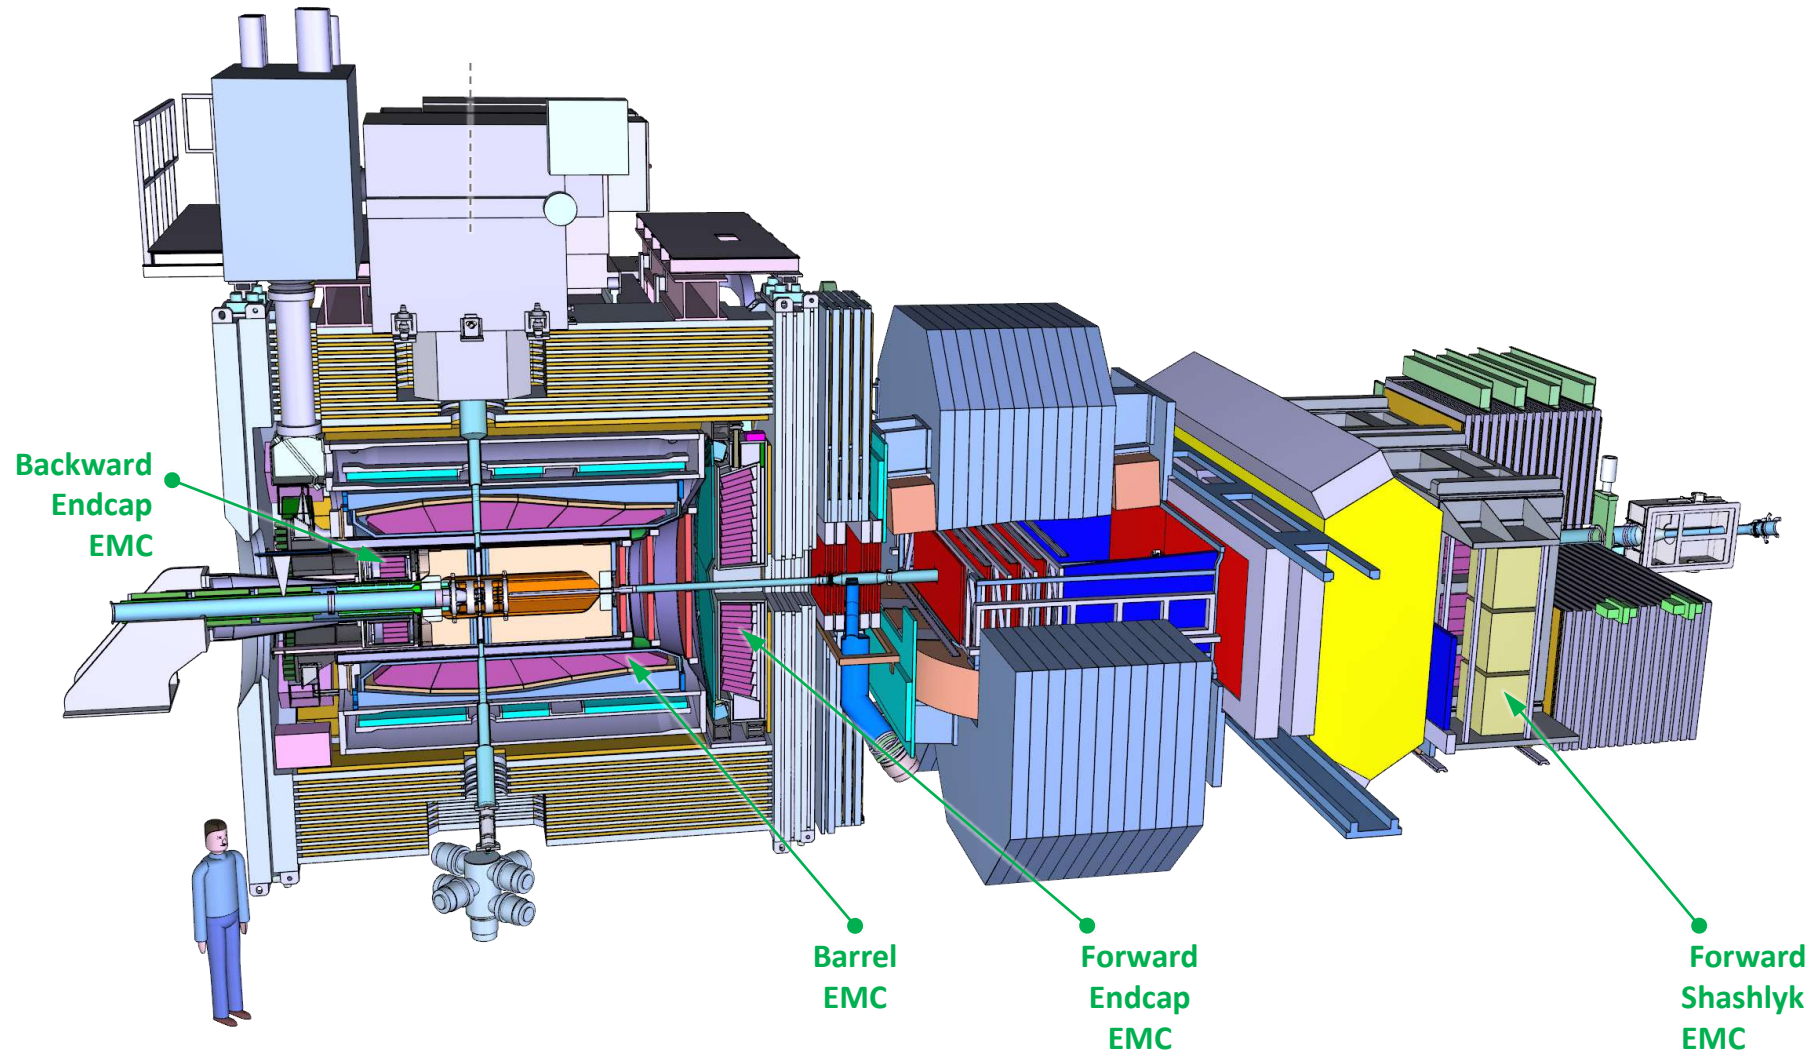

Target Spectrometer EMC

PANDA PWO Crystals

- PWO is dense and fast
- Low γ threshold is a challenge
- Increase light yield:
 - improved PWO II (2xCMS)
 - operation at -25°C (4xCMS)
- Challenges:
 - temperature stable to 0.1°C
 - control radiation damage
 - low noise electronics
- New producer CRYTUR

Large Area APDs




5x5 mm² 10x10 mm² and 7x14 mm²

Barrel Calorimeter

- 11000 PWO Crystals
- LAAPD readout, 2x1cm²
- $\sigma(E)/E \sim 1.5\%/\sqrt{E} + \text{const.}$

Forward Endcap

- 4000 PWO crystals
- High occupancy in center
- LA APD and VPTT

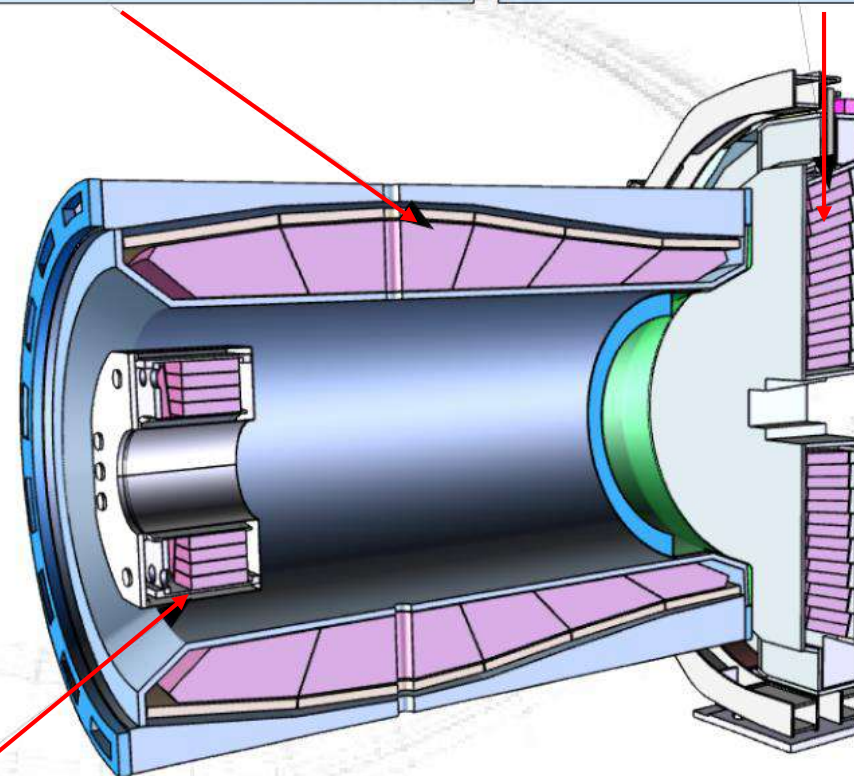

Backward Endcap for hermeticity,
530 PWO crystals


Target Spectrometer EMC – Status (1)



Barrel EMC

PWO Crystal Production

- New producer CRYTUR (CZ)
- High quality crystals received
- Eol to fund remaining crystals



APD Screening



- Screening of 30000 APDs
- Facility in full shift operation
- All alveoles produced
- APD readout APFEL ASIC produced
- **First slice (of 16) assembled**



Backward Endcap EMC

- Submodule design ready
- Prepare series production
- Readout new ASIC tests successful

Activities at MAMI - BWE EMC data taking with A1 spectrometer for high-resolution electron scattering in coincidence with hadrons


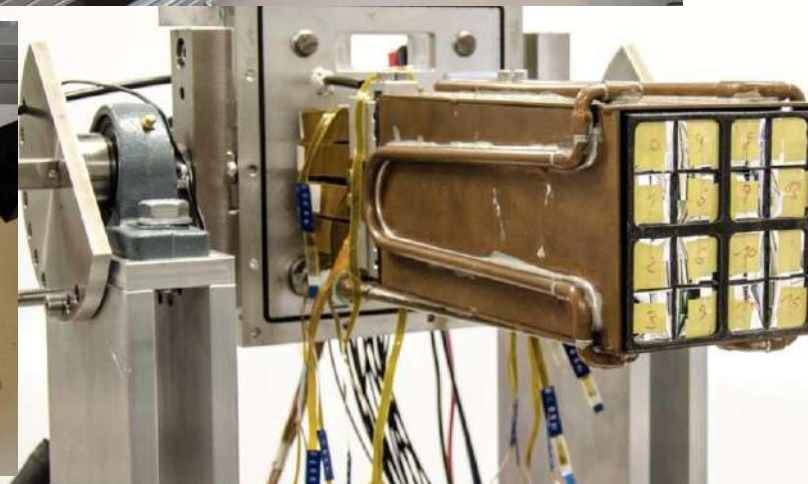
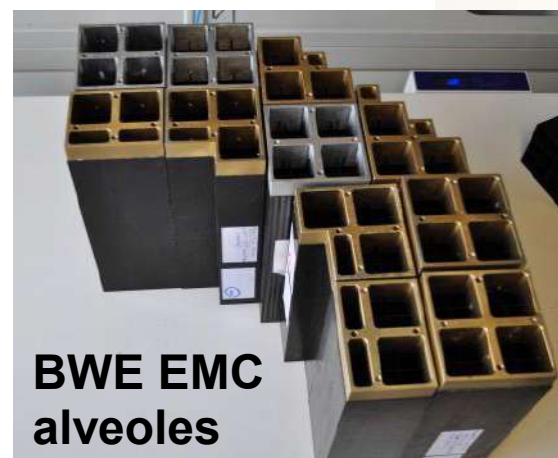


Target Spectrometer EMC – Status (2)

Forward Endcap EMC Status

- Production & Assembly well advanced
- All crystals are produced
- VPTT all characterized
 - Modules production done
- APD screening progress
 - Modules assembly started
- FADCs for digitization
 - SADC board (+Vers. Link) in production
- Test stand for Module calibration with cosmons
- Cooling system available, controls tests
- Pre-assembly support prepared
- **First detector system to be fully assembled**

A. Belias / GSI

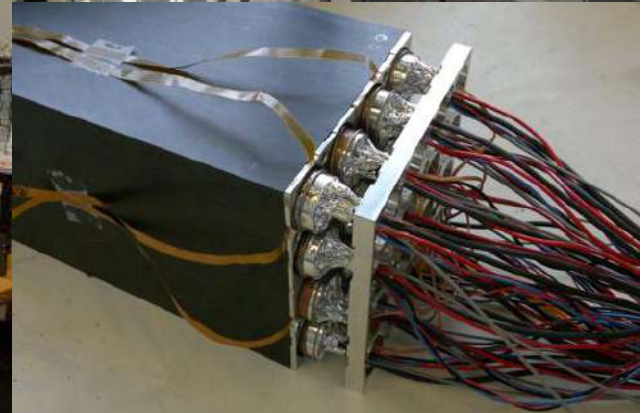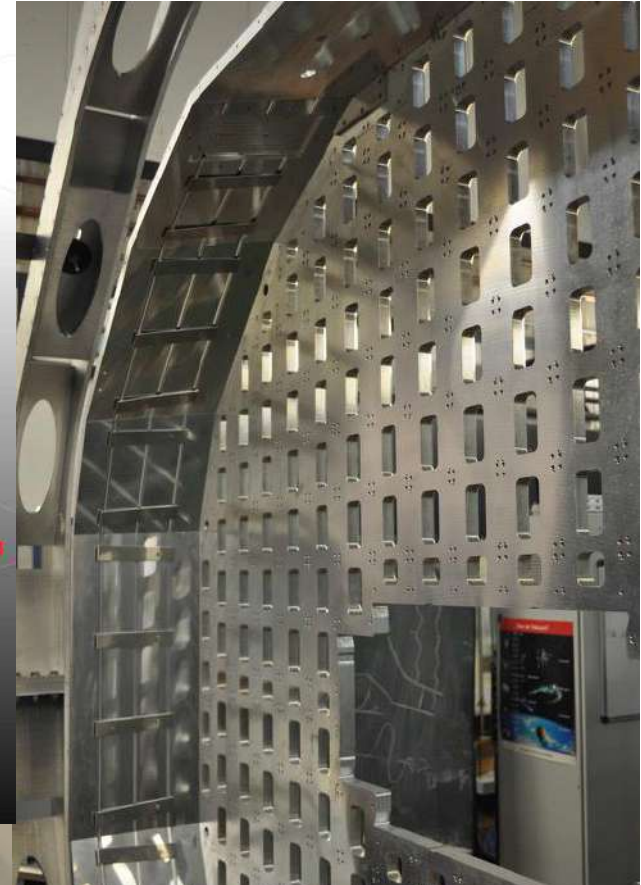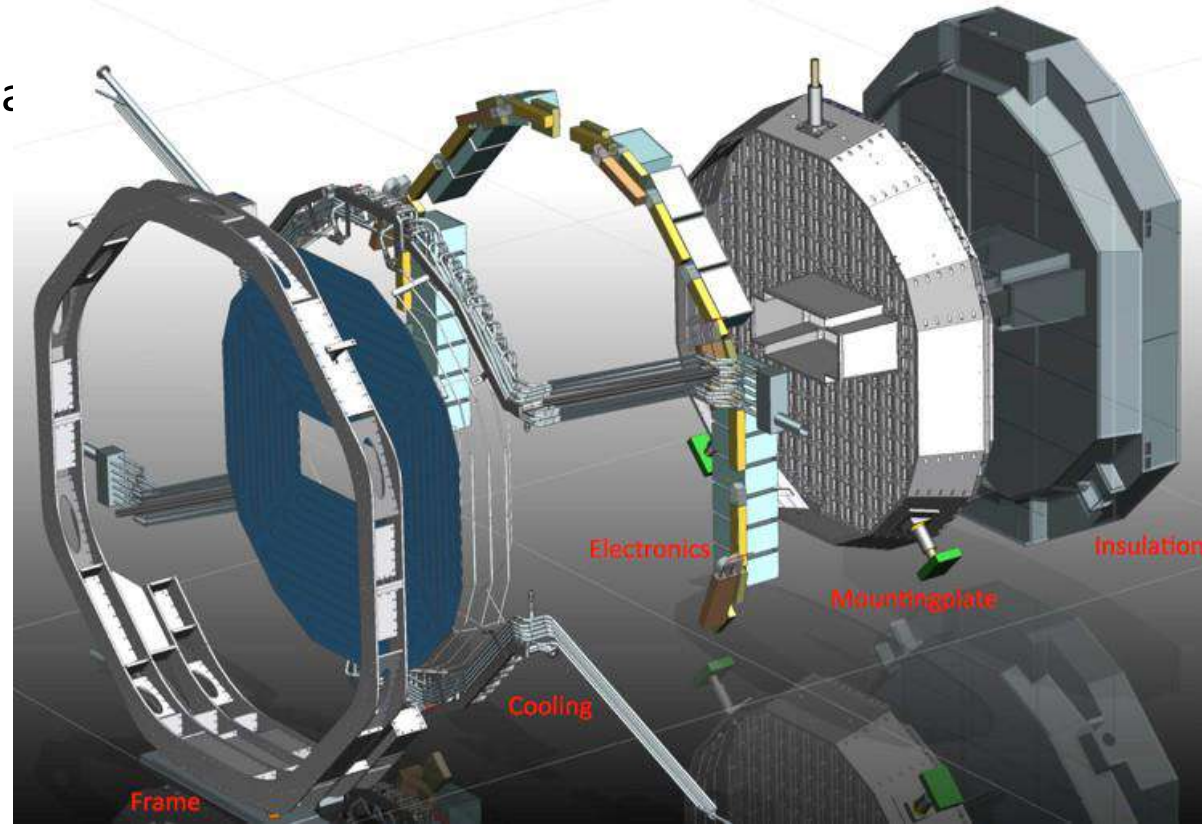

Forward Spectrometer Calorimeter

Forward electromagnetic calorimeter

- Interleaved scintillator and absorber layers
 - 0.3 mm lead and 1.5 mm scintillator
 - total depth 680 mm (380 layers)
 - transverse size 55x55 mm²
- WLS fibers for light collection
- PMTs for photon readout
- FADCs for digitization
- Active area size 297x154 cm²



Status

- TDR approved by FAIR ECE
- SADC readout board in production
- Module design 2 x 2 cells of 5.5 x 5.5 cm² verified
- Tests with electrons and tagged photons:


→ Energy resolution

- $\frac{\sigma_E}{E} = 5.6/E \oplus 2.4/\sqrt{E}[\text{GeV}] \oplus 1.3 [\%]$ (1-19 GeV e⁻)
- $\frac{\sigma_E}{E} = 3.7/\sqrt{E}[\text{GeV}] \oplus 4.3 [\%]$ (50-400 MeV γ)

→ Time resolution 100 ps/ $\sqrt{E}[\text{GeV}]$

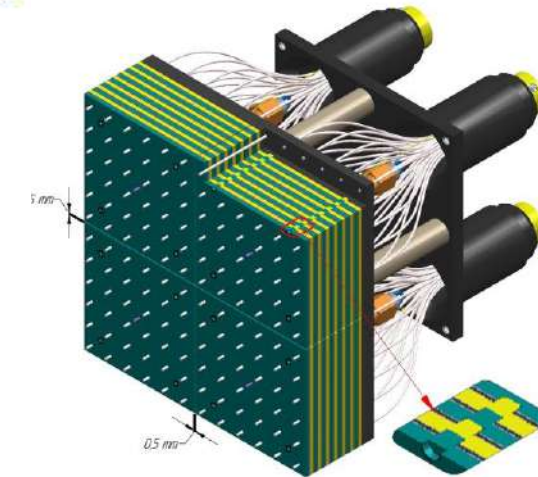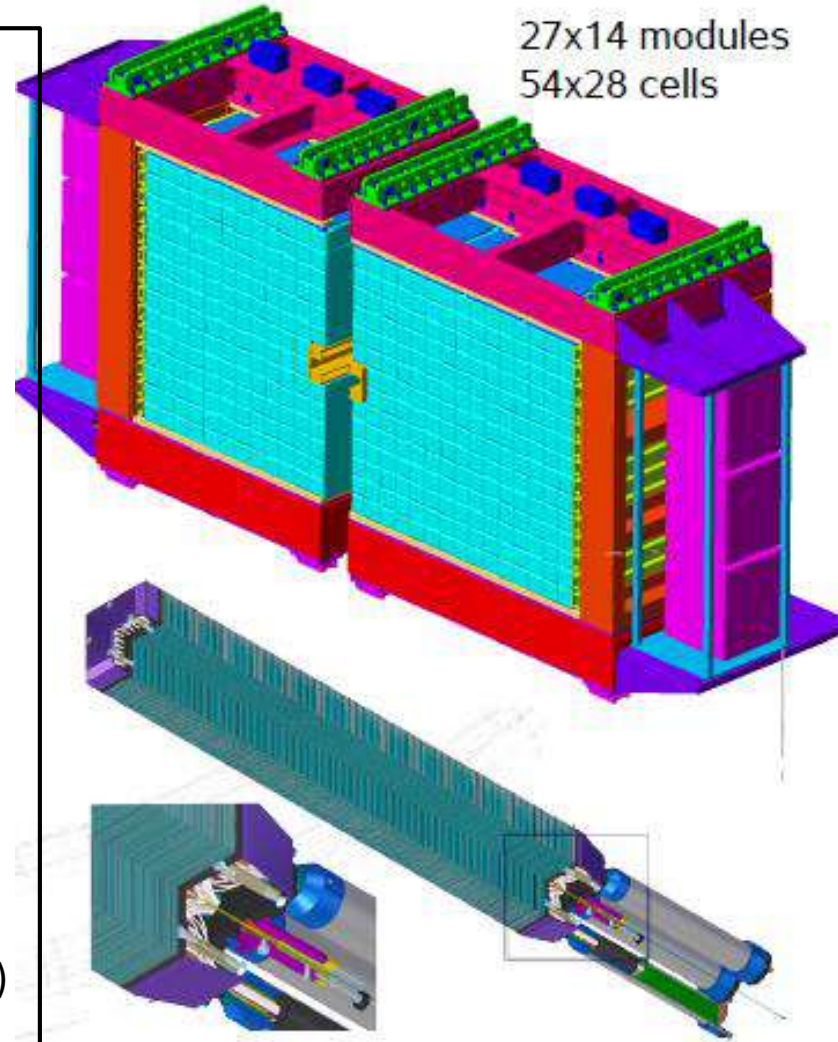


The PANDA Detector – Particle ID

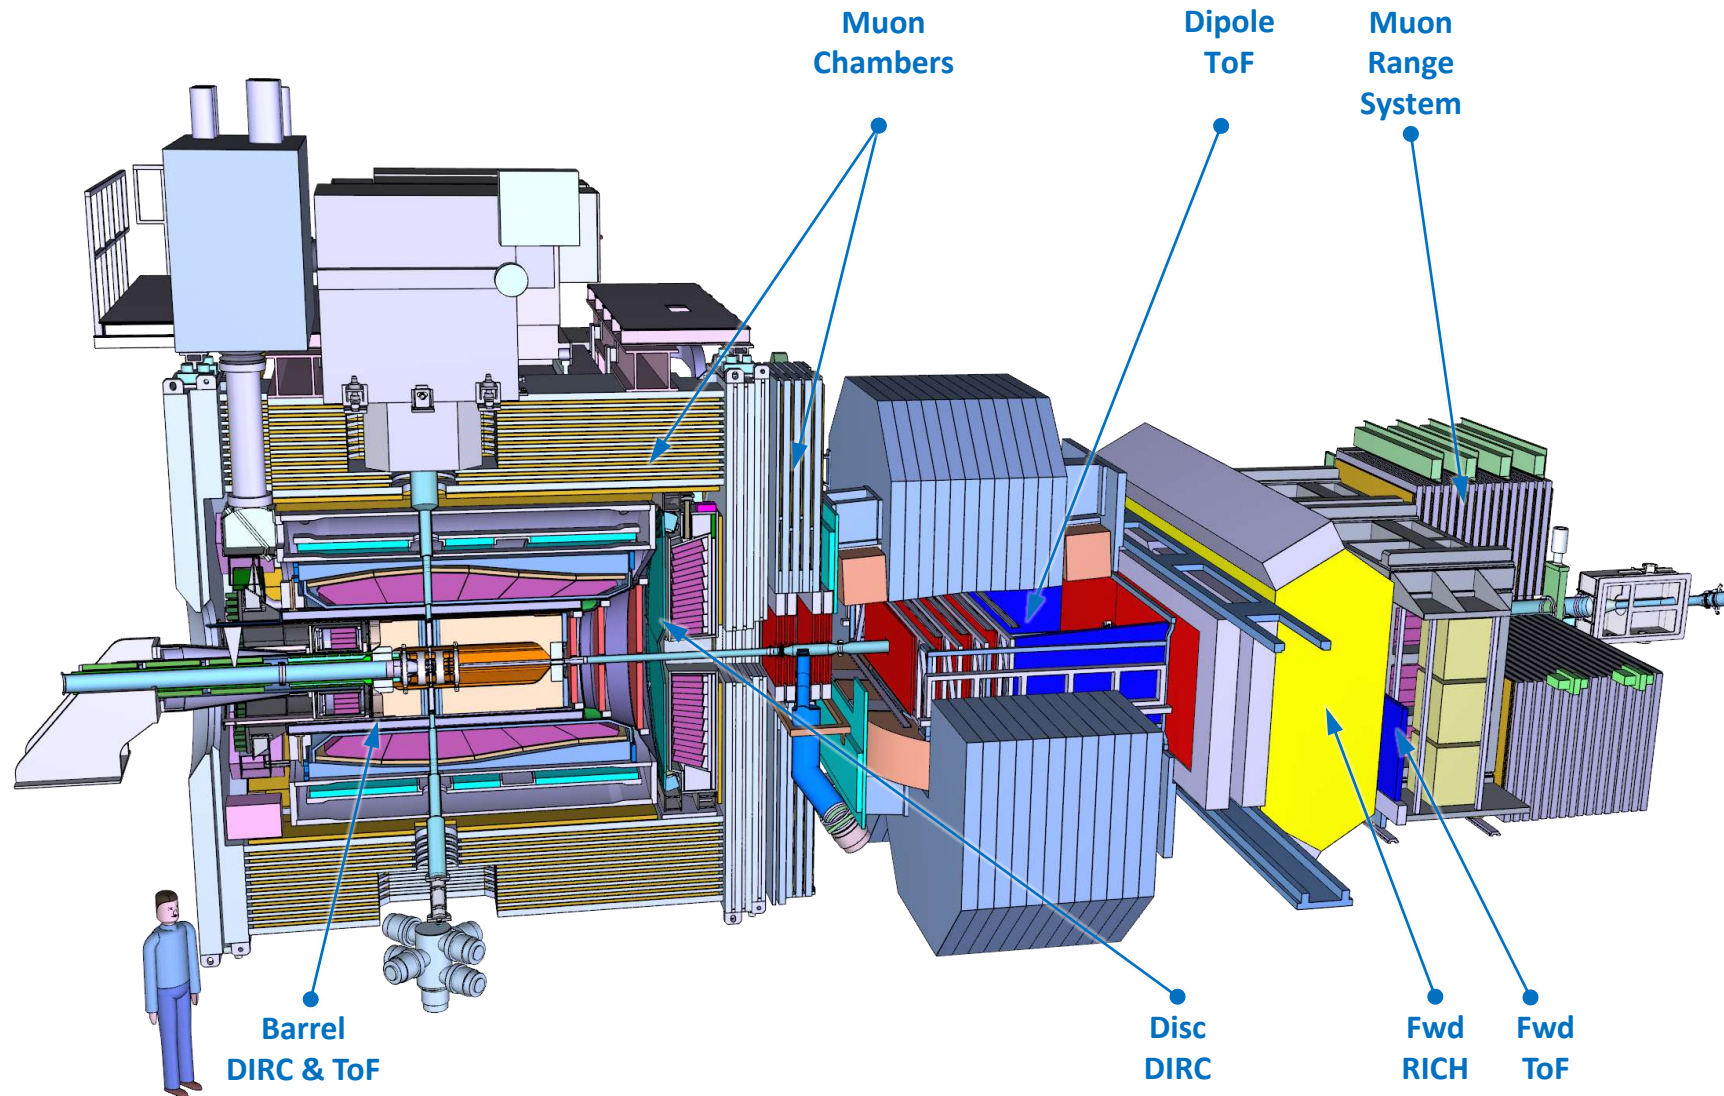

Target Spectrometer – DIRC Counters

Detection of Internally Reflected Cherenkov light
pioneered by BaBar

- Cherenkov detector with SiO_2 radiator
- Detected patterns give β of particles

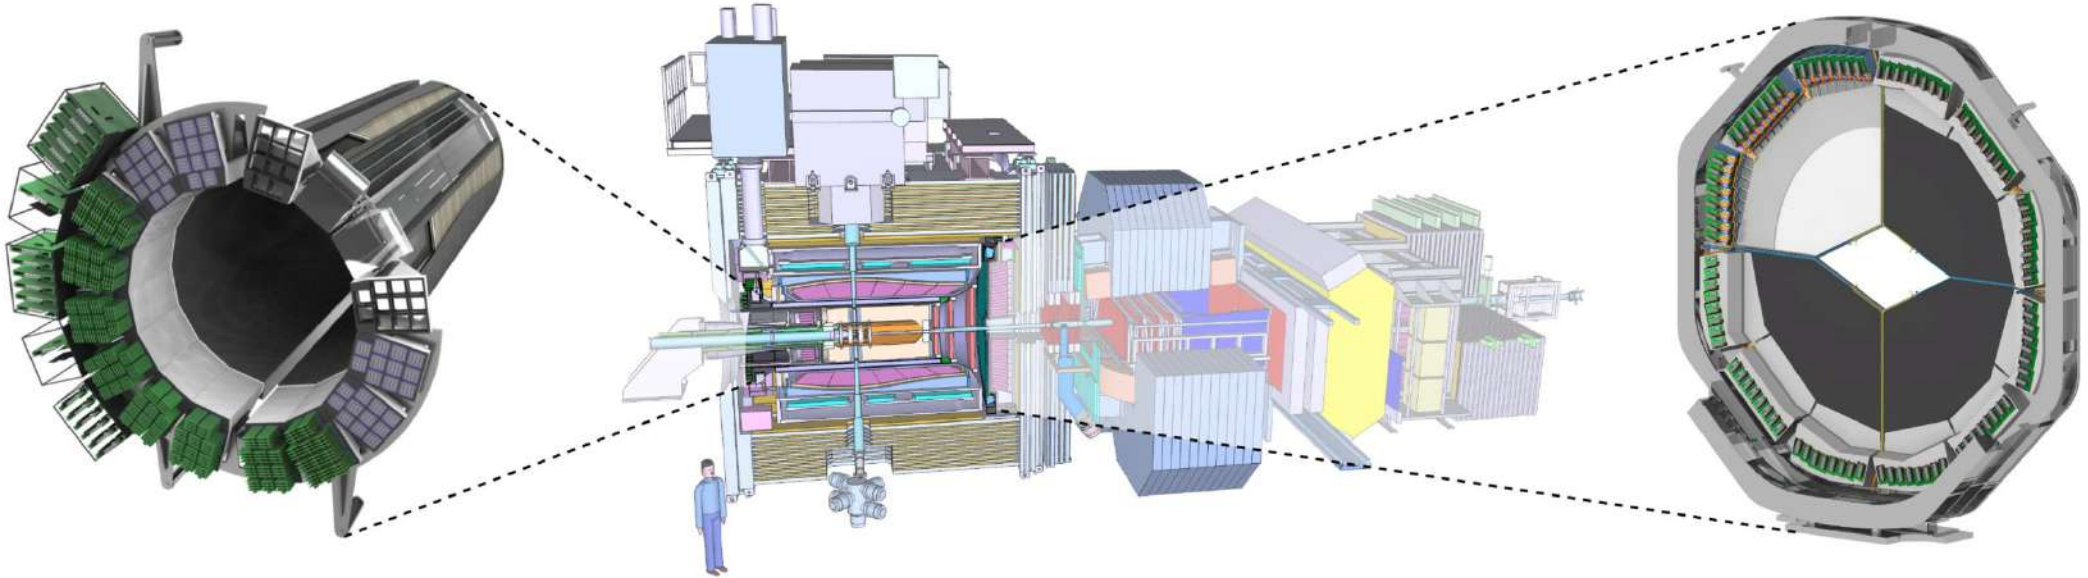

Barrel DIRC

- Design similar to BaBar DIRC
- Polar angle coverage:
 $22^\circ < \theta < 140^\circ$
- PID goal:
 3σ π/K separation up to 3.5 GeV/c
- *Barrel DIRC Leader: J. Schwiening (GSI)*

Endcap Disc DIRC

- Novel type of DIRC
- Polar angle coverage:
 $5^\circ < \theta < 22^\circ$
- PID goal:
 3σ π/K separation up to 4 GeV/c

Barrel DIRC

Optimization and challenges

- Barrel \varnothing : 1 m, L: 2.5 m
- Focusing by lenses/mirrors
- More compact design
- Magnetic field \rightarrow MCP PMT
- Fast readout to suppress BG





Testbeams at CERN

- Several campaigns with improved prototypes
- Measurements agree well with simulation
- Developments of reconstruction methods
- Optimization of readout options
- π/K separation of 4.3σ reached


Status

- TDR approved by FAIR ECE
- In-kind contract signed, tendering started
- Mechanics and optics production design
- QA of optics and MCP PMT developed
- Readout with PaDiWA / TDC (DiRICH, GSI)

A. Belias / GSI

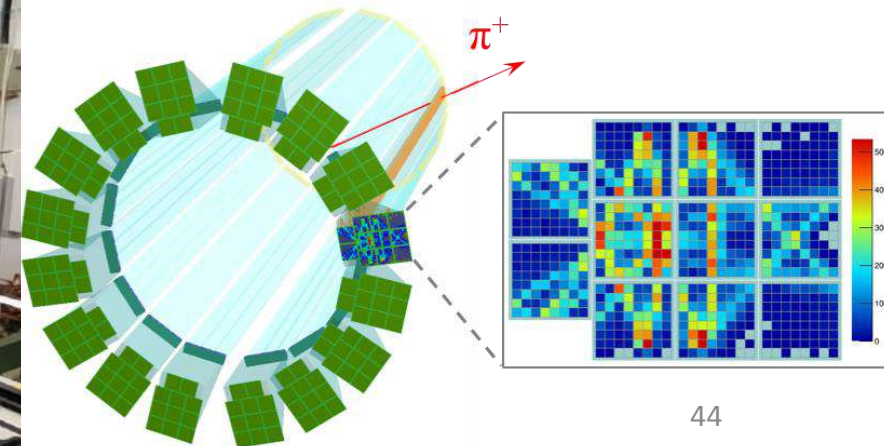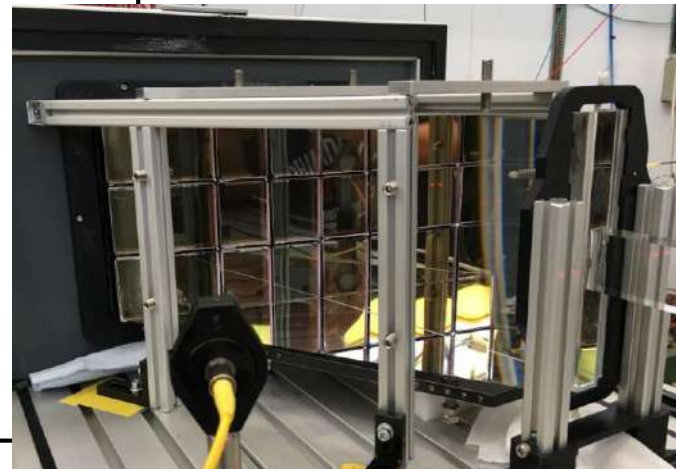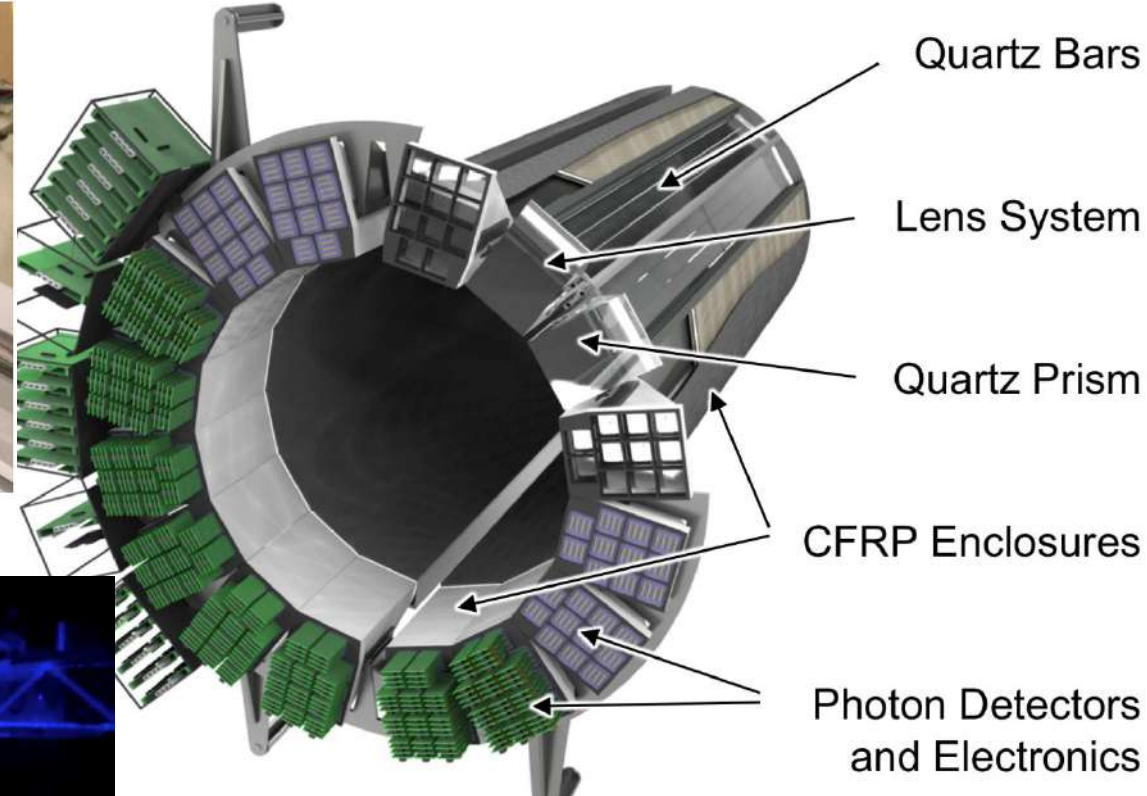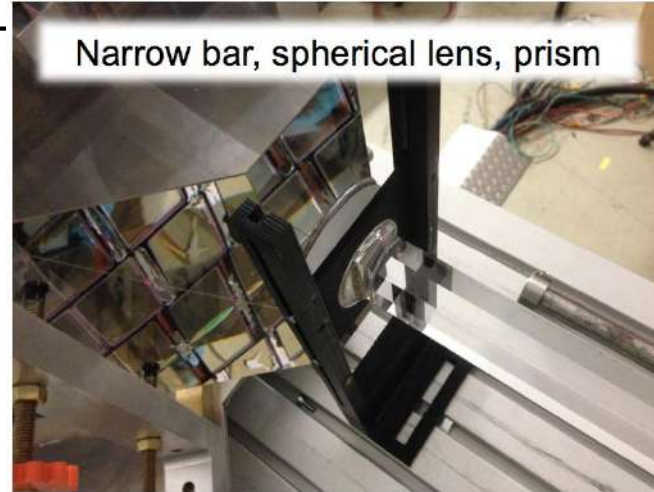

Endcap Disc DIRC

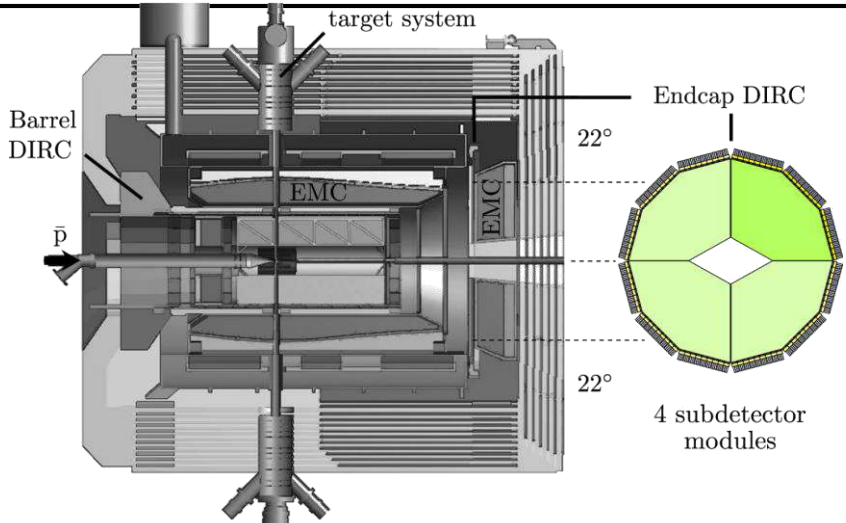

target system

Barrel DIRC

Endcap DIRC

22°

EMC

22°


4 subdetector modules

Novel concept for forward PID

- Based on DIRC principle
- Disc shaped radiator
- Readout at the disc rim

Status

- Advanced design
- Several testbeams at CERN
- TDR submitted to FAIR ECE
- Goal: Full quarter disc prototype

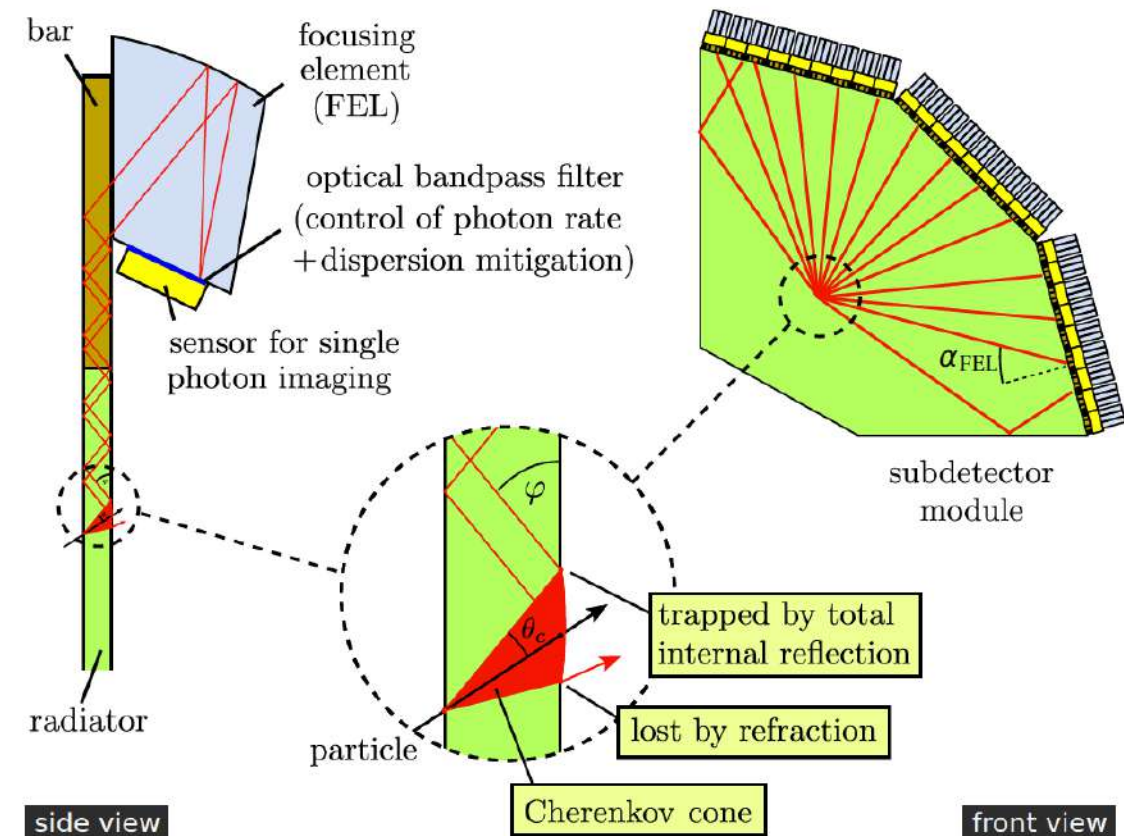

Basic components

- SiO₂ radiator disc - 4 quadrants
- Focusing elements
- Optical bandpass filter
- MCP PMT for photon readout in magnetic field
- Readout of MCP PMT with ToFPET ASIC

Barrel Time of Flight

Target Spectrometer



ToF in-between Barrel DIRC and Barrel EMC

Scintillator Tile Hodoscope


- Scintillator tiles 5 mm thick
- Photon readout with SiPMs (3x3 mm²)
 - High PDE, time resolution, rate capability
 - Work in B-fields, small, robust, low bias
- System time resolution: <100 ps achieved
- ASIC ToFPET for SiPM readout – Co-development
- Layout: long multilayer PCB for transmission (“railboard”)

Status

- TDR approved by FAIR ECE
- Study of scintillator thickness (3-6 mm):
 - 5mm thickness confirmed as optimal
- SiPM radiation hardness studies planned
- Full Prototype readout “railboard” required
- QA of SiPM required

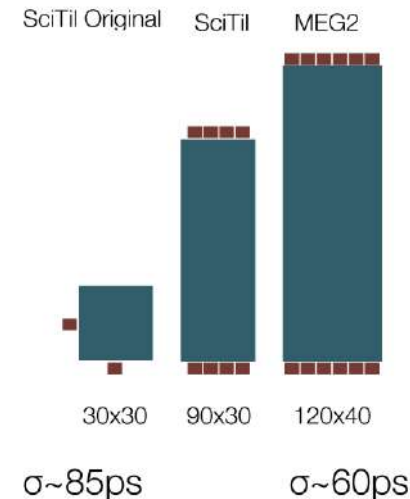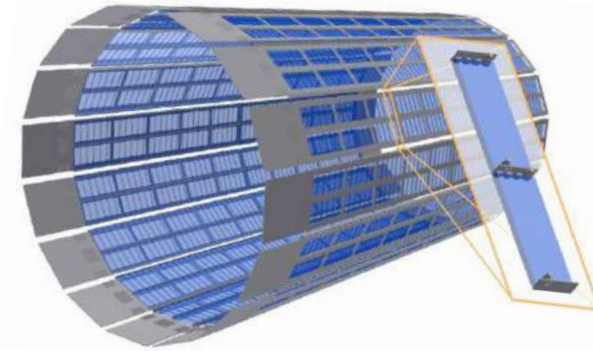

very first result
 $\sigma < 75$ ps

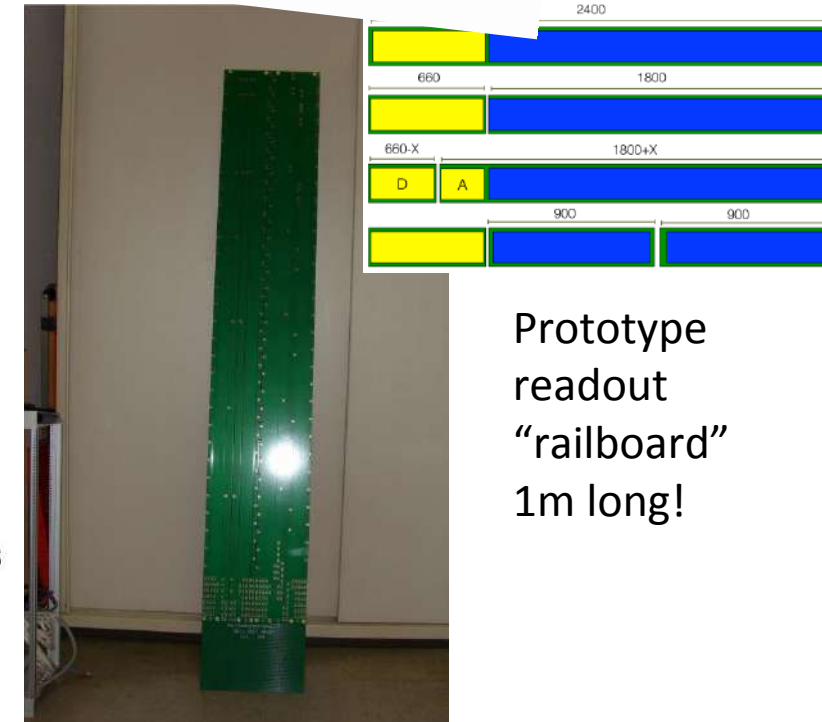

Prototype
readout
“railboard”
1m long!

Forward Time of Flight

Forward Spectrometer PID


- Time of Flight essential
- No start detector
- Relative timing to Barrel ToF

Detector layout

- Scintillator wall at $z=7.5\text{m}$
made of 140 cm long slabs
- Bicron 408 scintillator
- PMT readout on both ends
- 10 cm slabs on the sides,
5 cm slabs in the center
- Readout FPGA

Status


- TDR approved by FAIR ECE
- Readout optimization ongoing
- Design laser calibration system

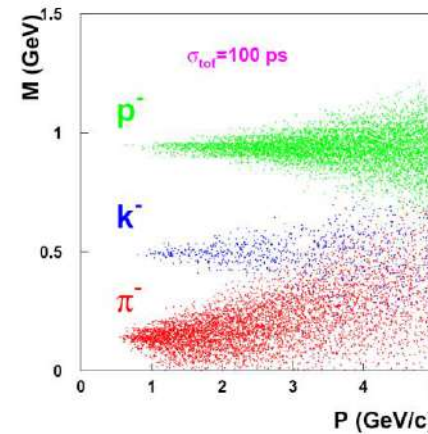

Goal: Time-of-flight with $\sigma(t)$ better than 100 ps

Side parts

2x23 counters
46 plastic scintillators
Bicron 408
140x10x2.5 cm
92 Hamamatsu R2083 (2")

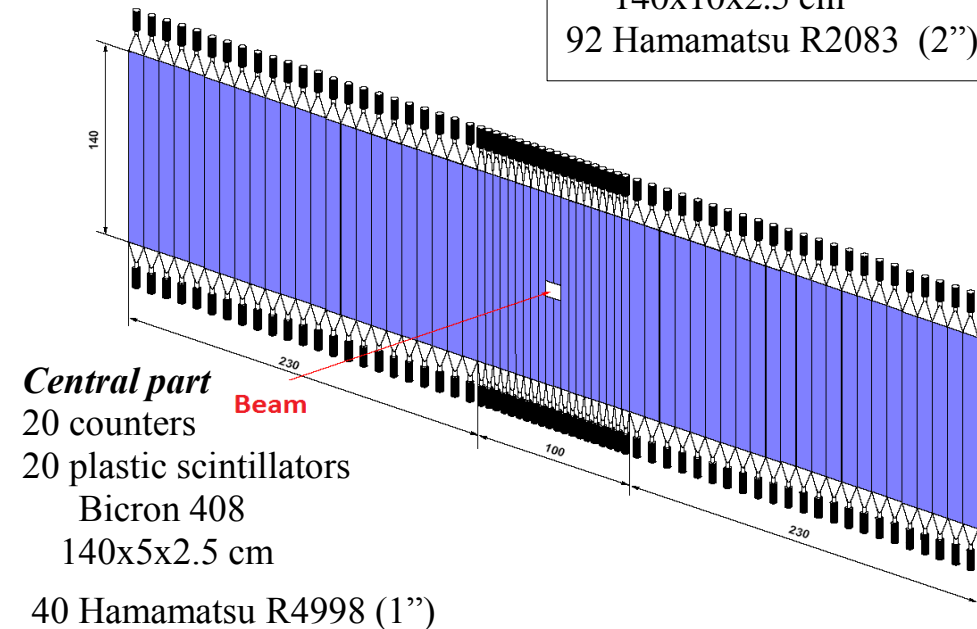

Central part

20 counters
20 plastic scintillators
Bicron 408
140x5x2.5 cm
40 Hamamatsu R4998 (1")


Muon Detector System

Muon system rationale

- Low momenta, high BG of pions
→ Multi-layer range system



Muon system layout

- *Barrel*: 12+2 layers in yoke
- *Endcap*: 5+2 layers
- *Muon Filter*: 4 layers
- *Fw Range System*: 16+2 layers
- *Detectors*: Drift tubes with wire & cathode strip readout

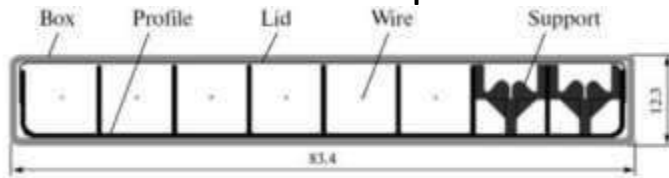


Status

- TDR approved by FAIR ECE
- Testbeams at CERN, aging, cosmics
- Aging tests up to 3C/cm²
- Digital FEE (Artix-7) development
- Production designs starting


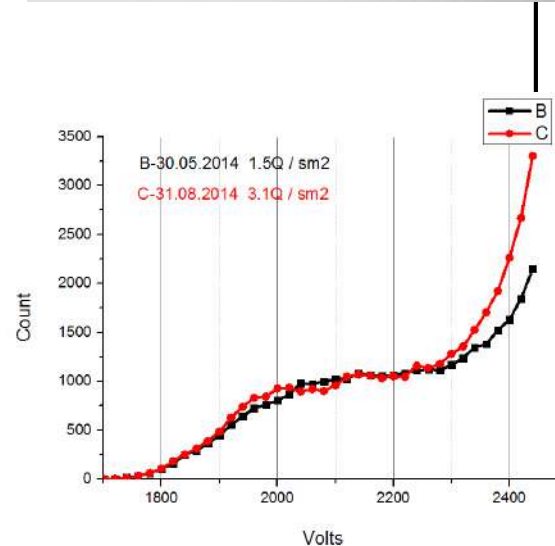
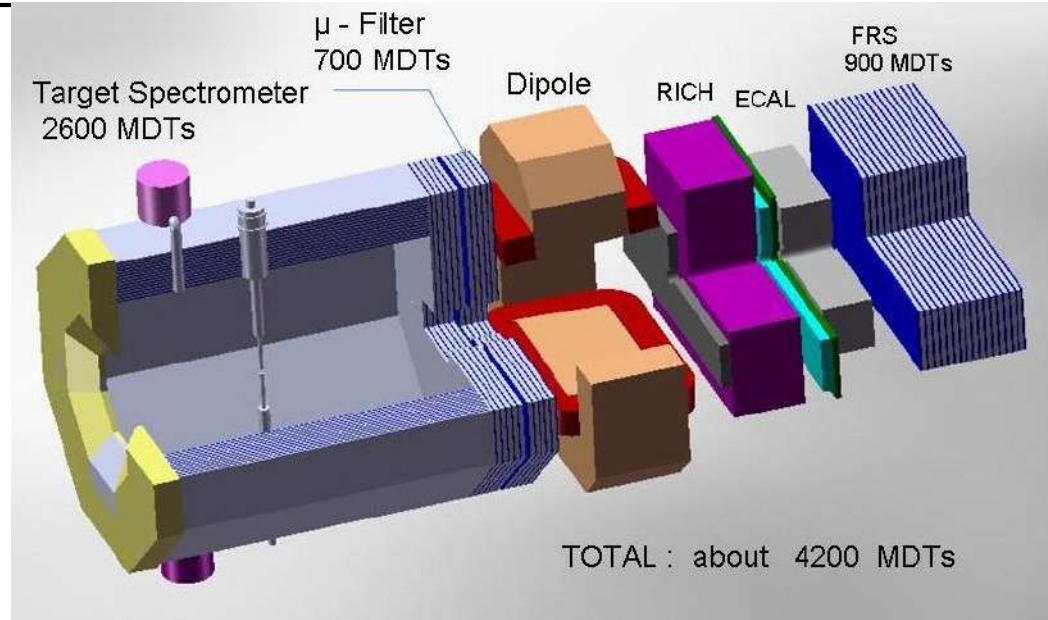


Testbeam results:

- μ , p and n easily resolved

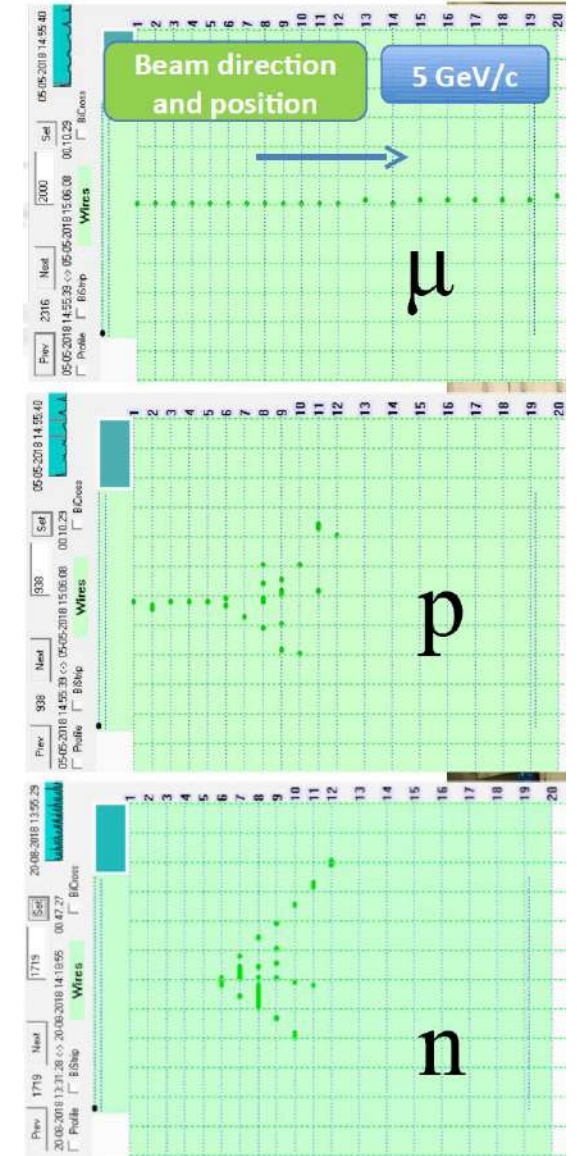

Forward RICH

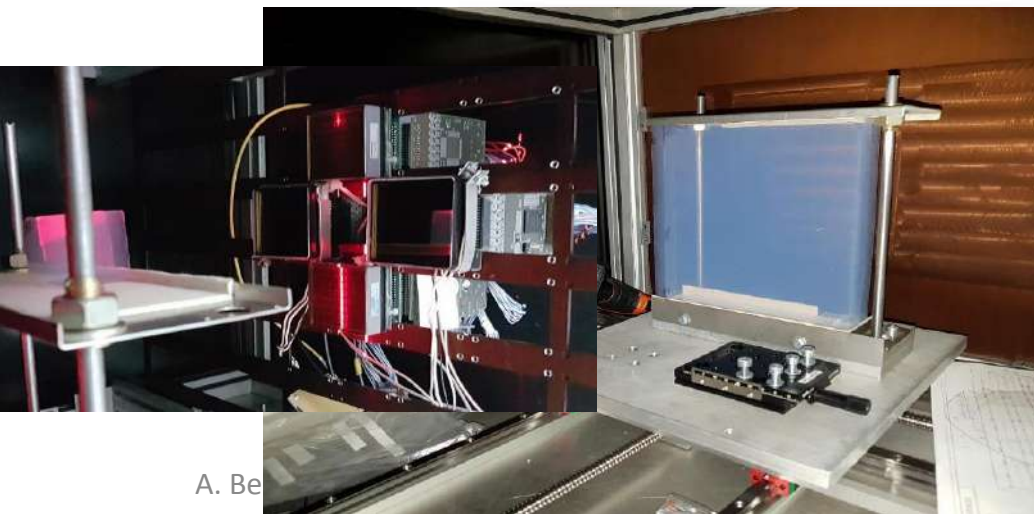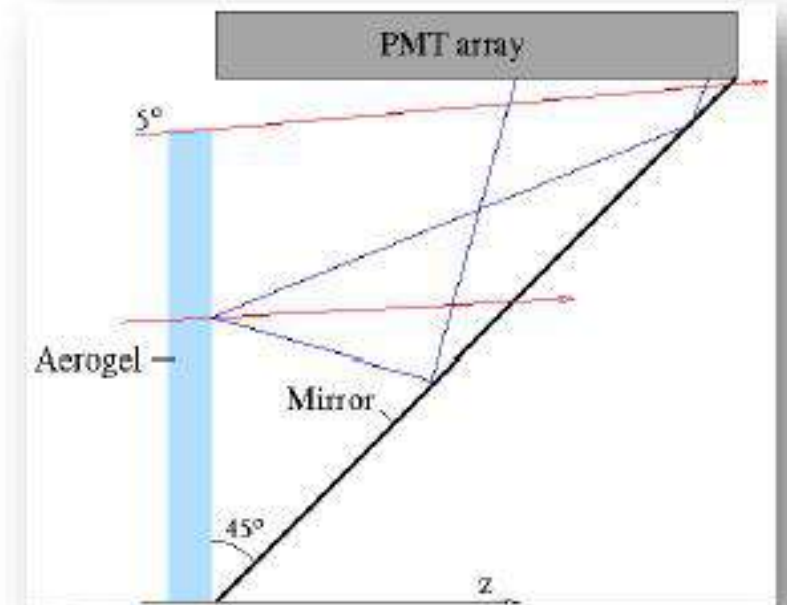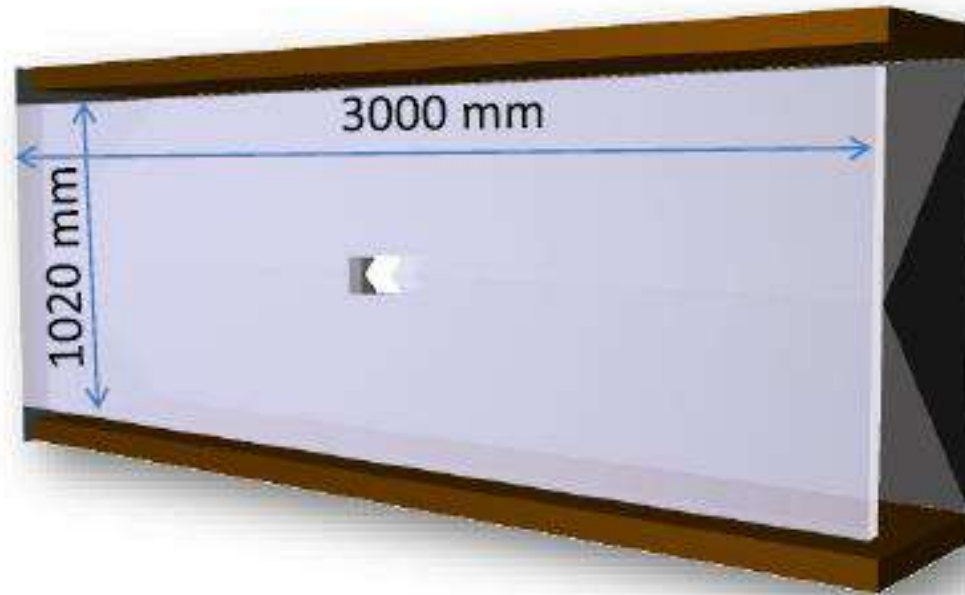

Hamamatsu H8500 MaPMT

- flat panel,
- 8x8 anode pixels of 6mm size
- 89% active area ratio
- Bialkali photocathode
- Gain: $1.5 \cdot 10^6$
- Relatively cheap ($\approx \text{€}1800$ / unit)
- Robust
- Long lifetime

- 2-layer aerogel $n_1=1.050$, $n_2=1.047$ (no gas)
- Flat mirrors only
- MaPMT readout
- MC simulated PID performance:
 - π/K up to $P = 10 \text{ GeV}/c$
 - μ/π up to $P = 2 \text{ GeV}/c$


Hypernuclear Setup

Principle:

- Produce hypernuclei from captured Ξ


Modified Setup:

- Primary retractable wire/foil target
- Secondary active target to capture Ξ and track products with Si strips
- HP Ge detector for γ -spectroscopy

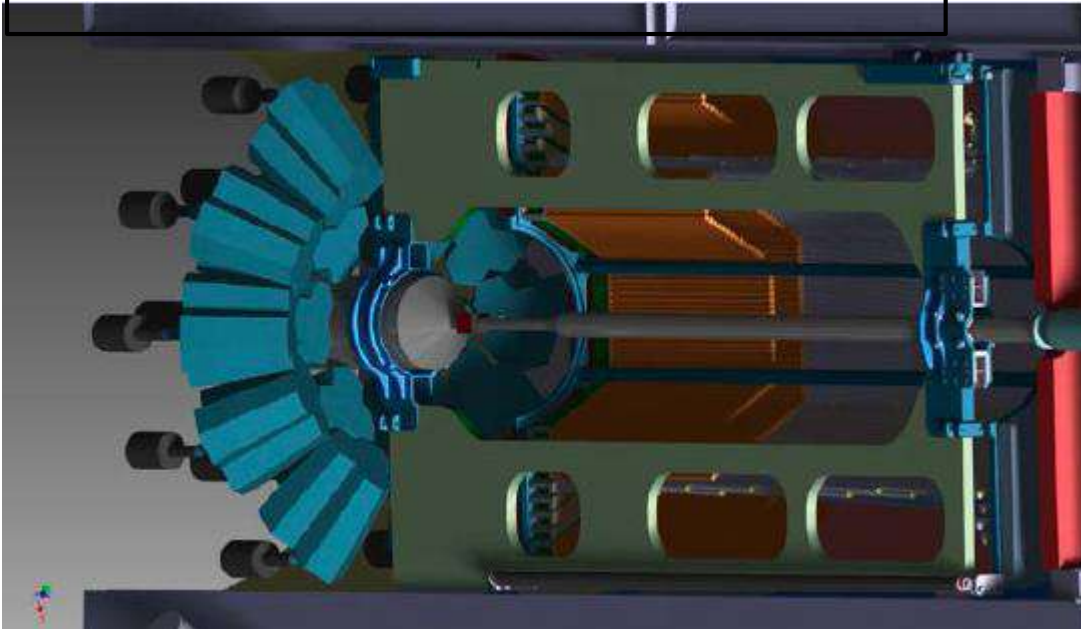


Primary target:

- Diamond wire
- Piezo motored wire holder

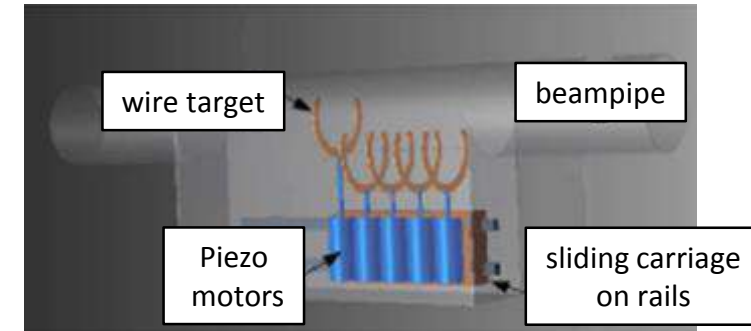

Active secondary target:

- Silicon microstrips
- Absorbers

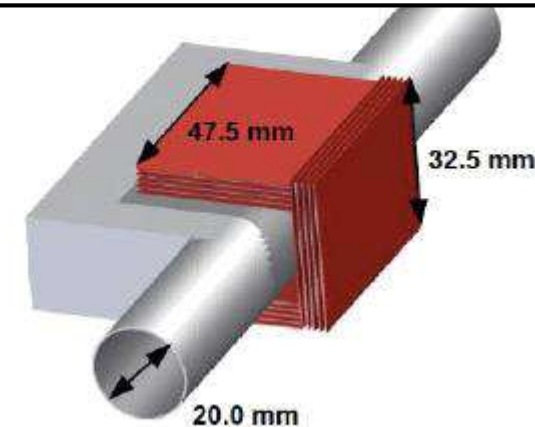

Data Acquisition System (DAQ)

Continuous Acquisition

Components:


- Time distribution: SODA
- Intelligent frontends
- Powerful compute nodes
- High speed network

Data Flow:


- Data reduction
- Local feature extraction
- Data burst building
- Event selection
- Data logging after online reconstruction

→ Programmable Physics Machine

Online selection schemes and physics algorithms are a key for successful measurements

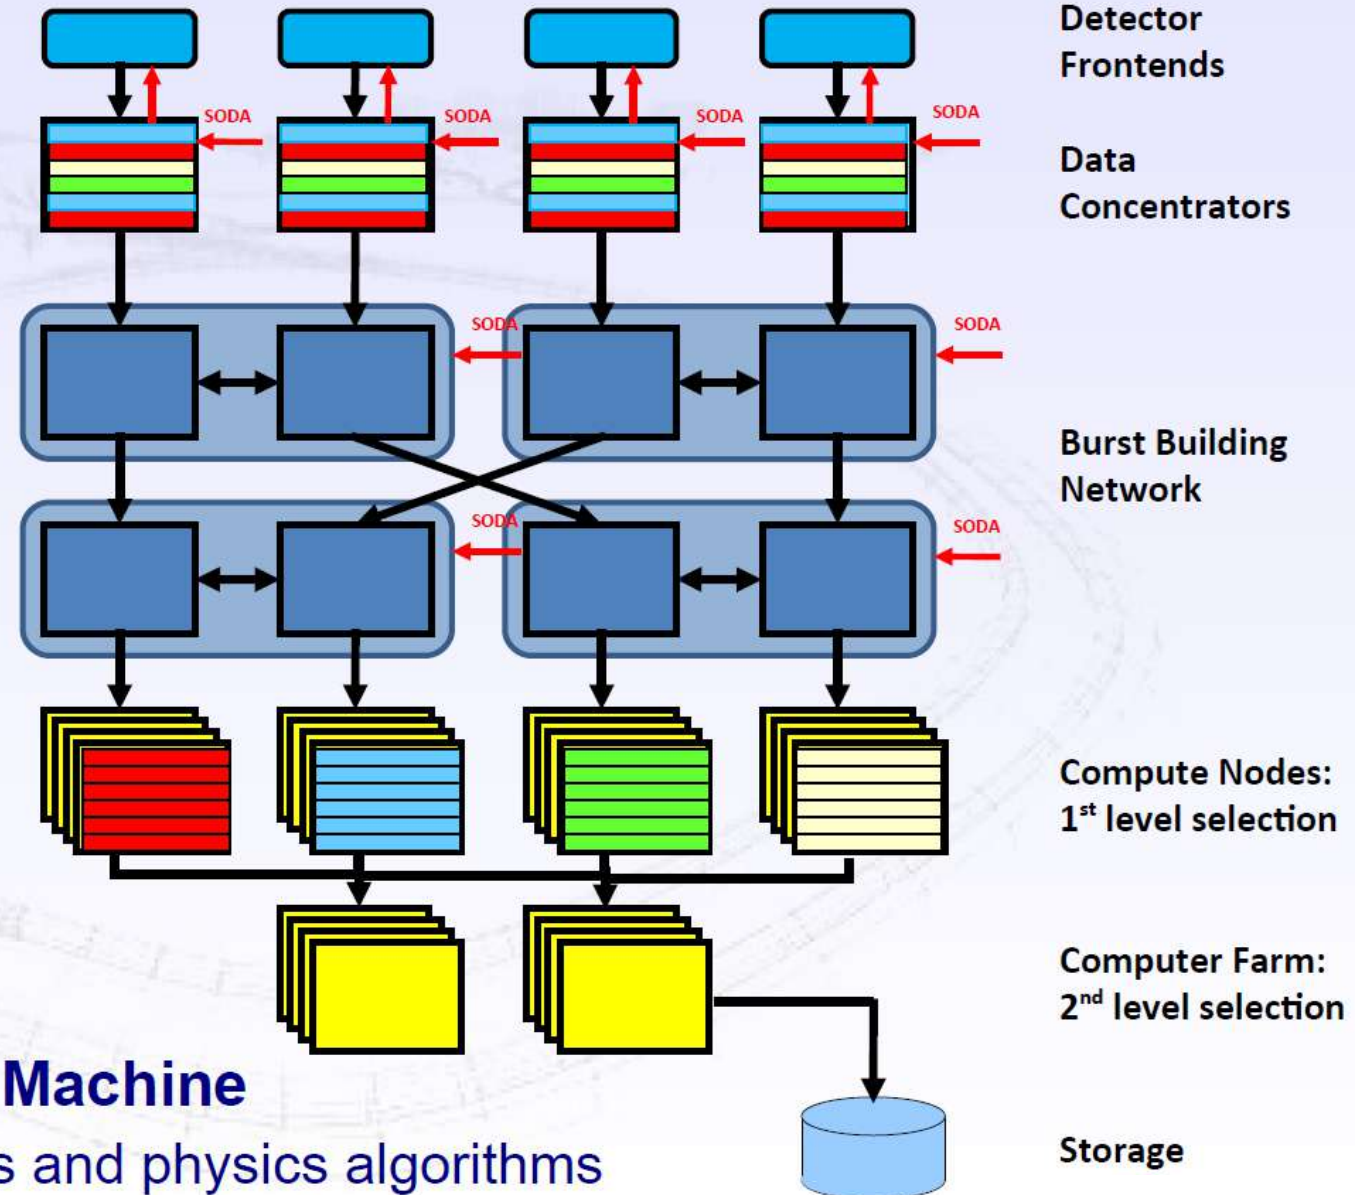

Intelligent *in-situ* data processing

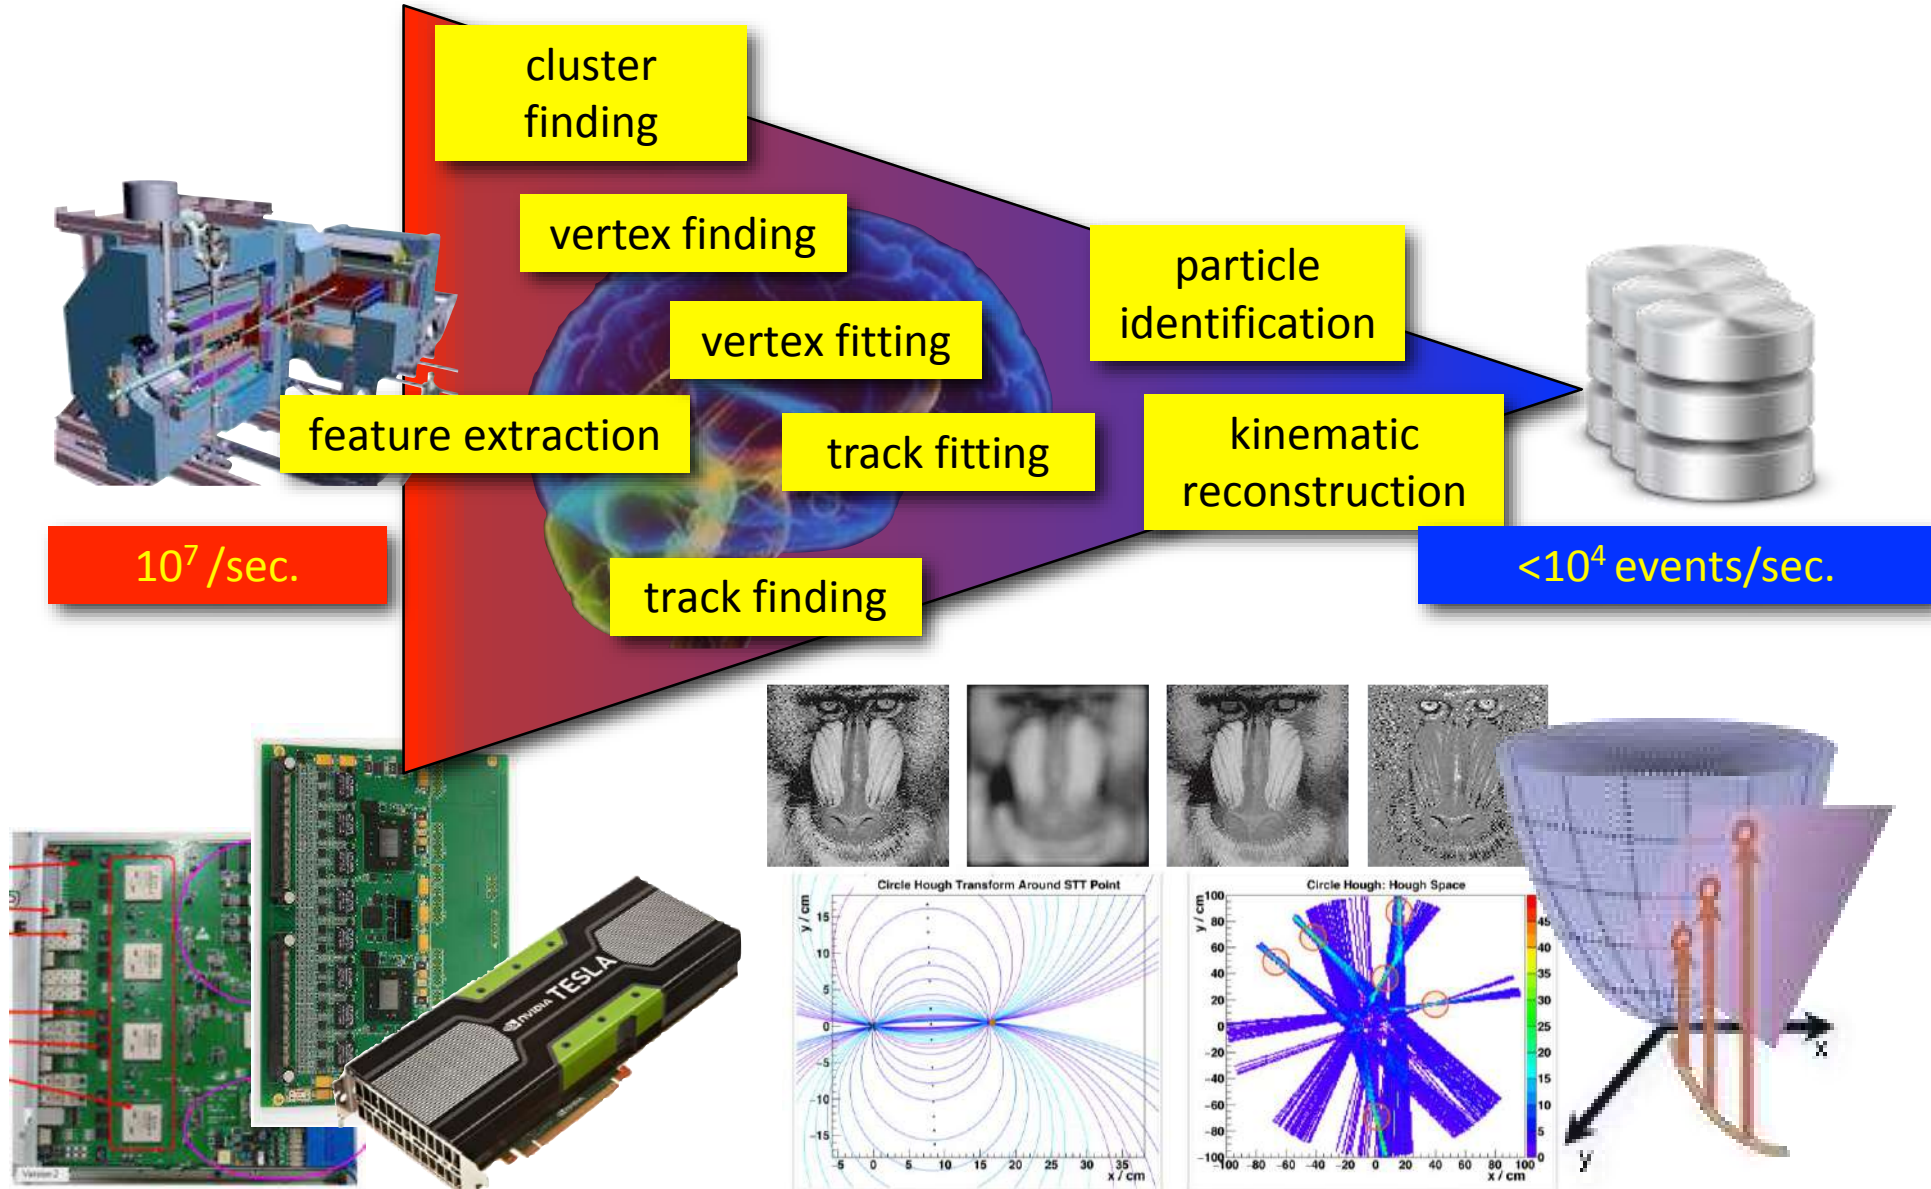

Detector Control System (DCS)



Operations parameters:


- HV, LV, currents,
- Gas-flow, cooling

Environmental parameters:

- Temp., Hum.

Interface to HESR, Magnets

Detector Safety

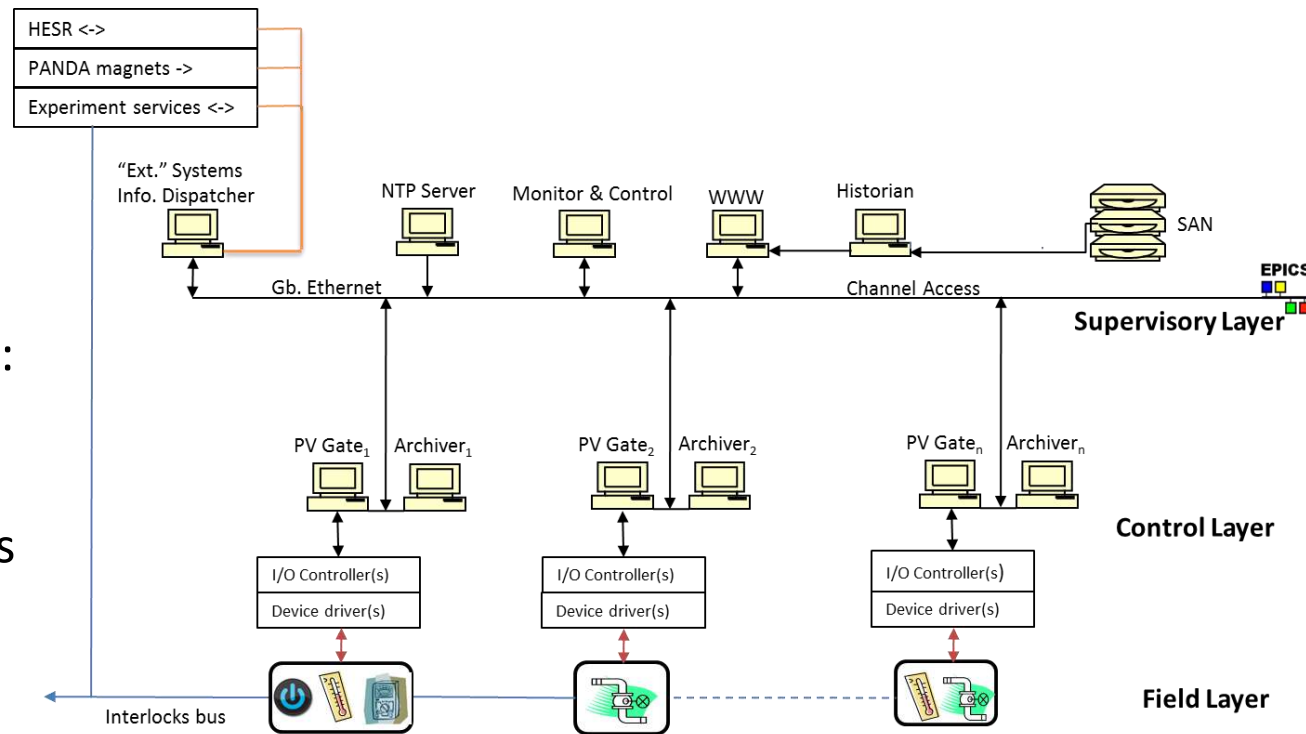

Supervisory Layer

Controls GUI interface
Databases & configurations
Interface: HESR, DAQ

Control Layer

I/O controllers
Device Drivers
Archiving sub-system


Field Layer

PANDA sub-systems specific
Interface: Detector Safety System

EPICS - Experimental Physics and Industrial Control System


- ❑ Decentralized architecture
- ❑ Freely scalable
- ❑ Allows "partitioning"

Schedule

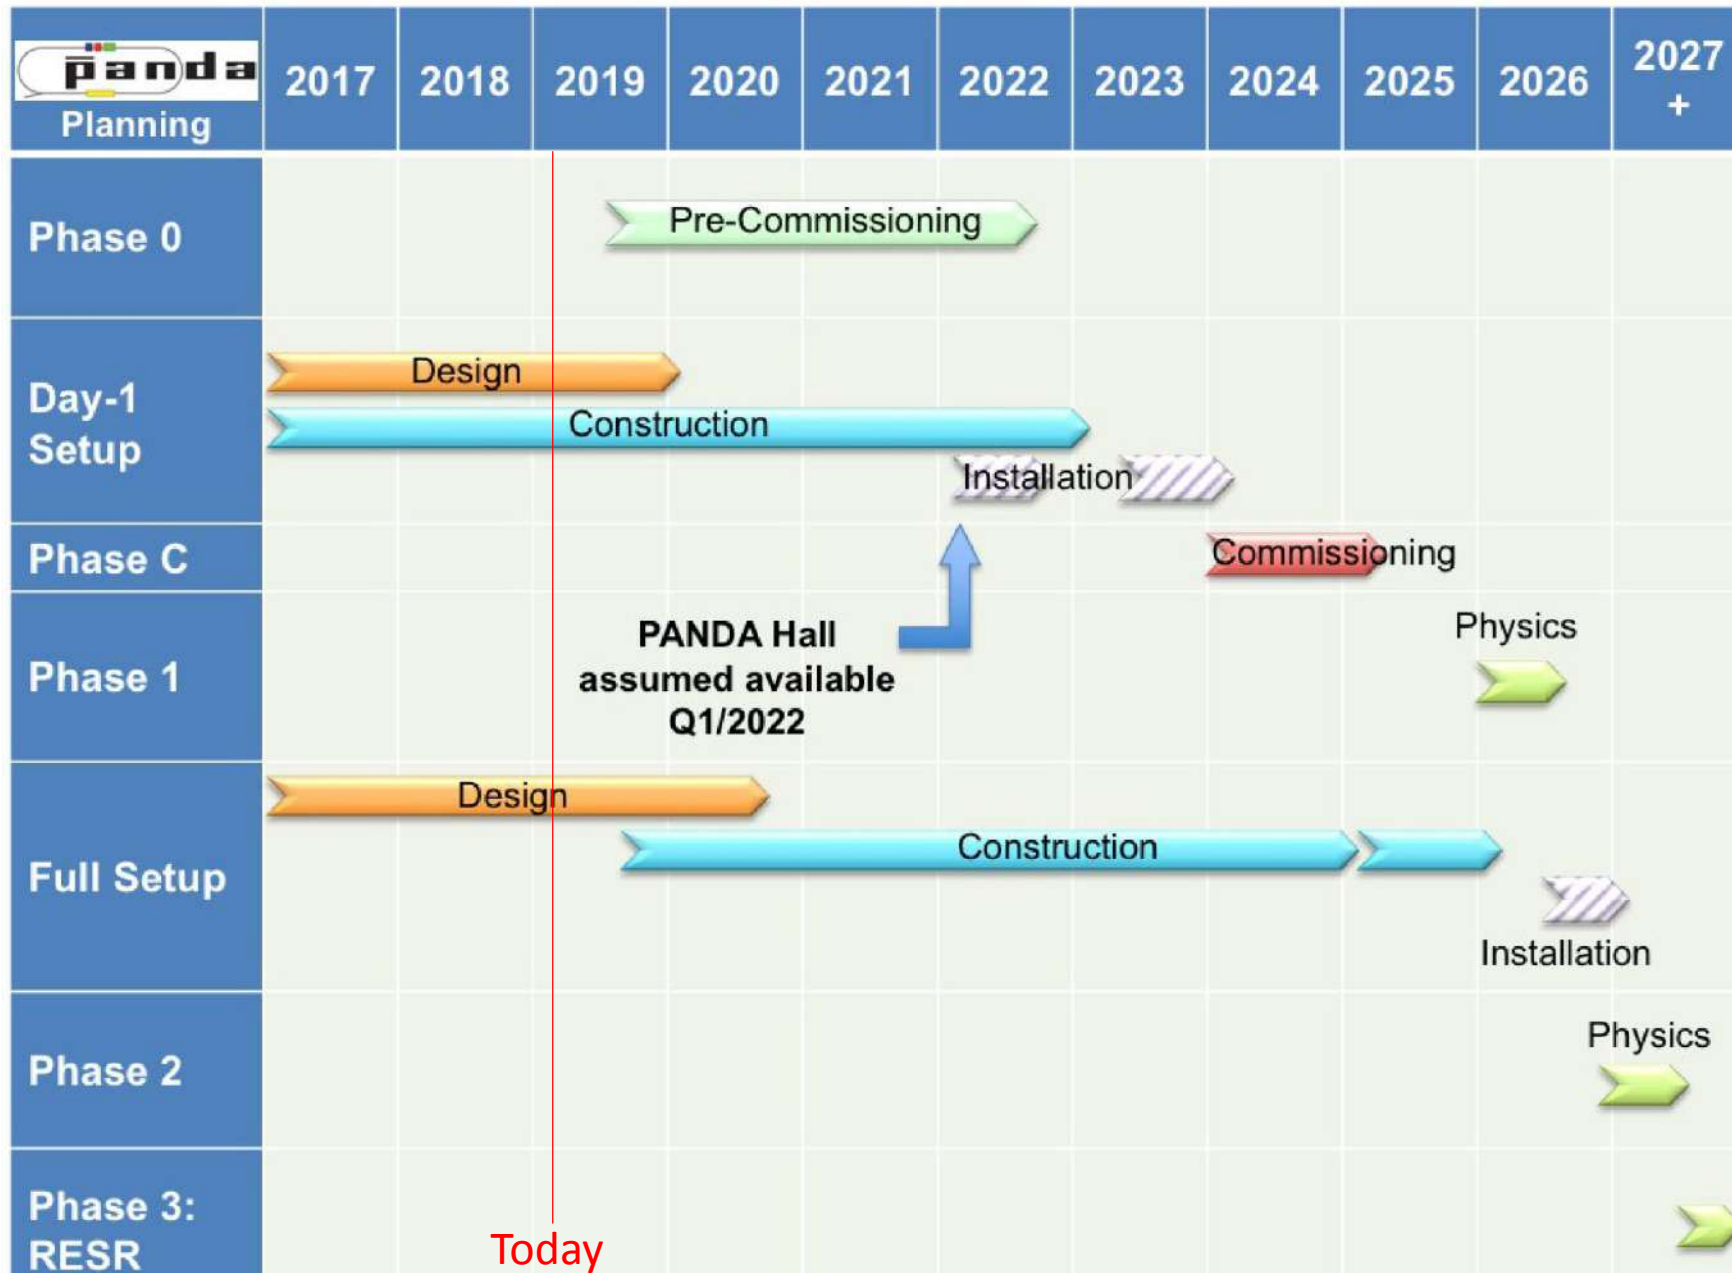



- Construction of Phase 1 systems
- Installation periods
 1. Solenoid, Dipole, Supports
 2. All Detectors
- Commissioning with protons
- Physics with antiprotons

Start Setup (Phase 1)

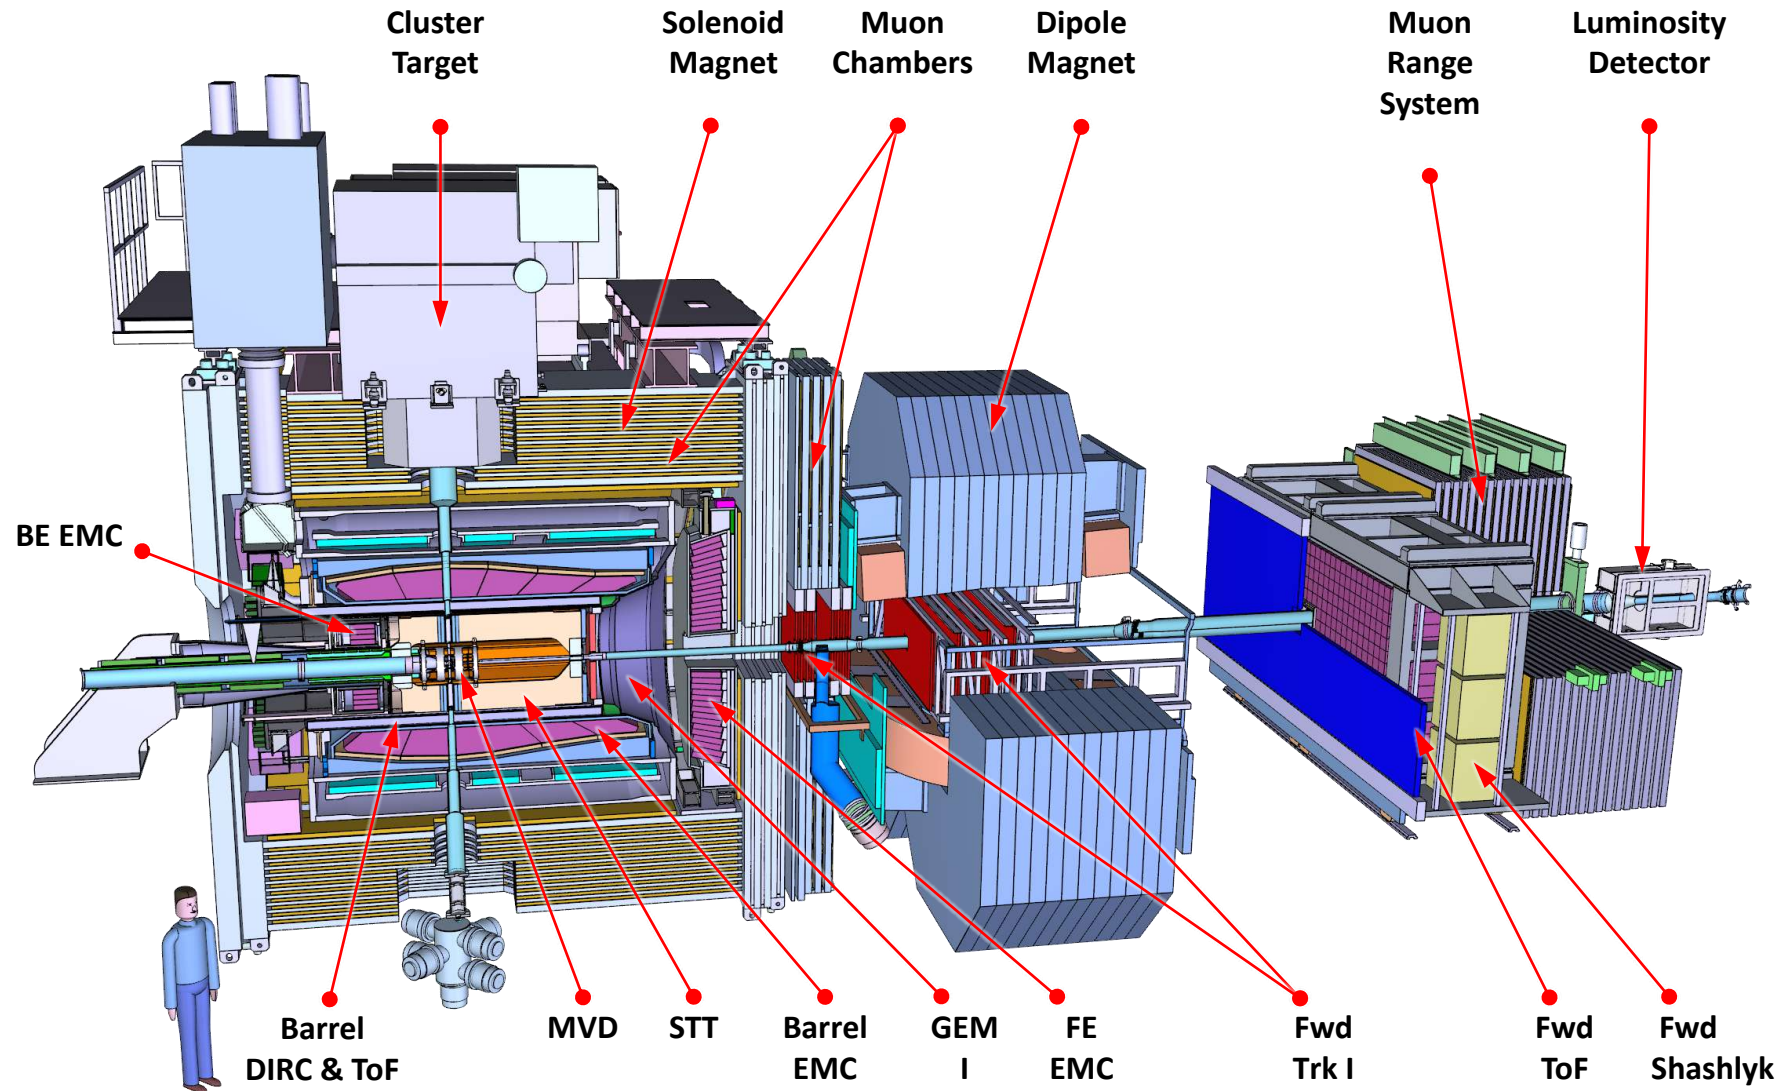

Full Setup (Phase 2)

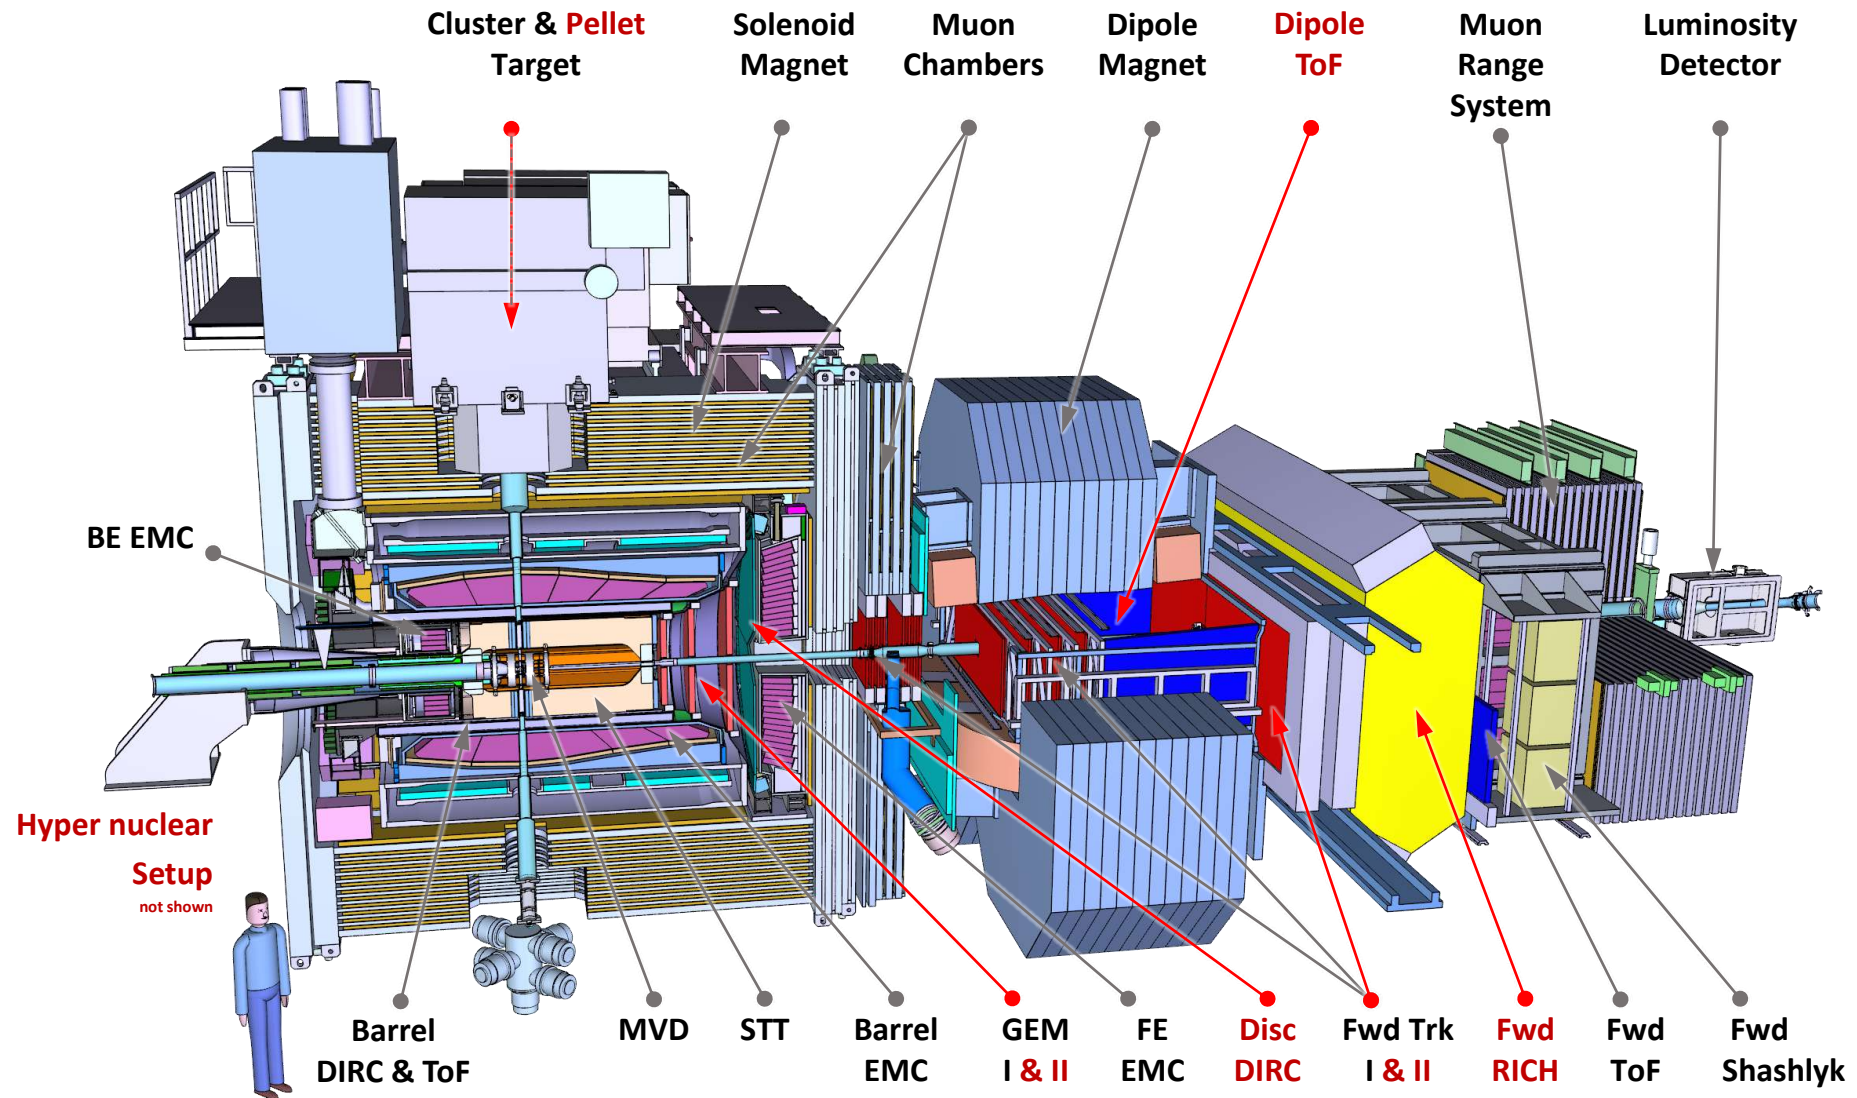

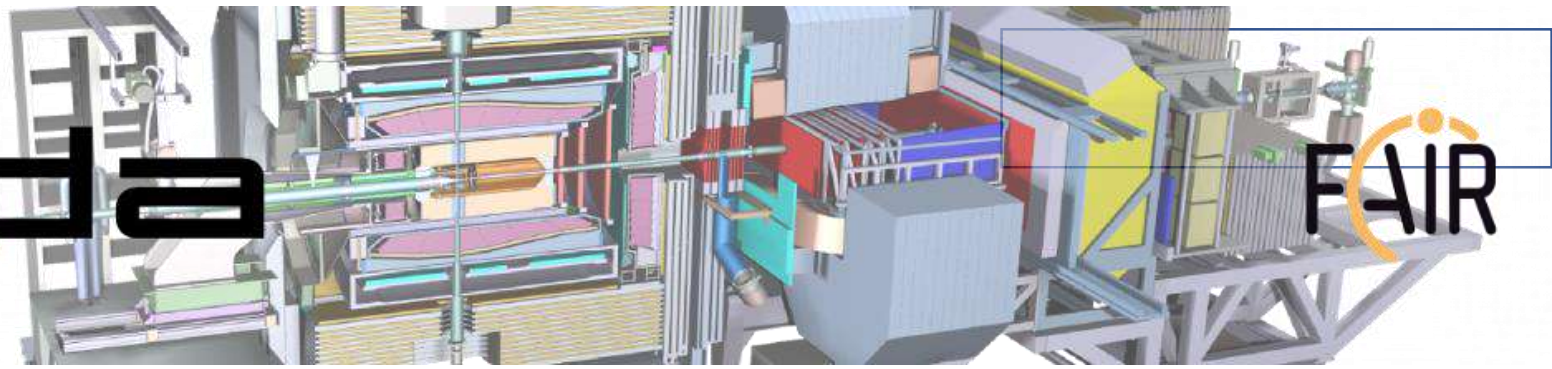

Present Status of PANDA

- Most Phase 1 detector TDRs complete
- Preparation for Construction MoUs ongoing
- Sharpened physics focus and detector start sequence

Timeline for PANDA Construction

- Construction of detector systems has started
- Pre-assembly of first components has started
- Installation at FAIR planning 2022 - 2023
- Commissioning with proton beam 2024 - 2025

PANDA physics with antiproton beam 2026

- Versatile physics machine with full detection capabilities
- PANDA will shed light on many of today's QCD puzzles

Opportunities for significant contributions in PANDA

Opportunities – Aspects of Contributions



- Scope for R&D

- Phased schedule allows for R&D
- Detectors Phase 1 - TDR process
- Detectors Phase 2
- Upgrades Higher Luminosity

- Prototype tests & developments

- Readout electronics
 - analog / digital
- DAQ algorithms FPGA, GPU
- Detector Controls software

- First of Series

- Detector module integration
- Mechanical interfaces
- Operations

- Production

- QA/QC processes
- Construction, mechanics, supports
- Detector module assembly
- Overall detector integration

Opportunities - Detector specific areas



- **GEM Tracker**

- Readout Electronics – SAMPA (!)

- **Detector Controls**

- EPICS interface s/w
- Embedded systems s/w
- Sensors Driver s/w

- **Tracking**

- Barrel & Forward Stations
- Readout Electronics upgrades

- **Barrel ToF**

- Readout Co-development
- SiPM Characterization

- **Data Acquisition**

- Versatile Readout Selection (TRB)
- Real-time processing (FPGA)
- On-line feature extraction (GPU/CPU)

- **Disc DIRC / Forward RICH**

- Readout Co-development
- Mechanics integration

PANDA Collaboration



More than 450 physicists from 70 institutions in 19 countries



Aligarh Muslim University
U Basel
IHEP Beijing
U Bochum
Magadh U, Bodh Gaya
BARC Mumbai
IIT Bombay
U Bonn
IFIN-HH Bucharest
U & INFN Brescia
U & INFN Catania
NIT, Chandigarh
AGH UST Cracow
JU Cracow
U Cracow
IFJ PAN Cracow
GSI Darmstadt

Karnatak U, Dharwad
TU Dresden
JINR Dubna
U Edinburgh
U Erlangen
NWU Evanston
U & INFN Ferrara
FIAS Frankfurt
LNF-INFN Frascati
U & INFN Genova
U Glasgow
U Gießen
Birla IT&S, Goa
KVI Groningen
Sadar Patel U, Gujarat
Gauhati U, Guwahati
IIT Guwahati
Jülich CHP


Saha INP, Kolkata
U Katowice
IMP Lanzhou
INFN Legnaro
U Lund
HI Mainz
U Mainz
U Minsk
ITEP Moscow
MPEI Moscow
U Münster
BINP Novosibirsk
Novosibirsk State U
IPN Orsay
U & INFN Pavia
Charles U, Prague
Czech TU, Prague
IHEP Protvino

PNPI St. Petersburg
U of Sidney
U of Silesia
U Stockholm
KTH Stockholm
Suranree University
South Gujarat U, Surat
U & INFN Torino
Politecnico di Torino
U & INFN Trieste
U Tübingen
TSL Uppsala
U Uppsala
U Valencia
SMI Vienna
SINS Warsaw
TU Warsaw

Welcome to join
Exciting Physics



<https://panda.gsi.de>

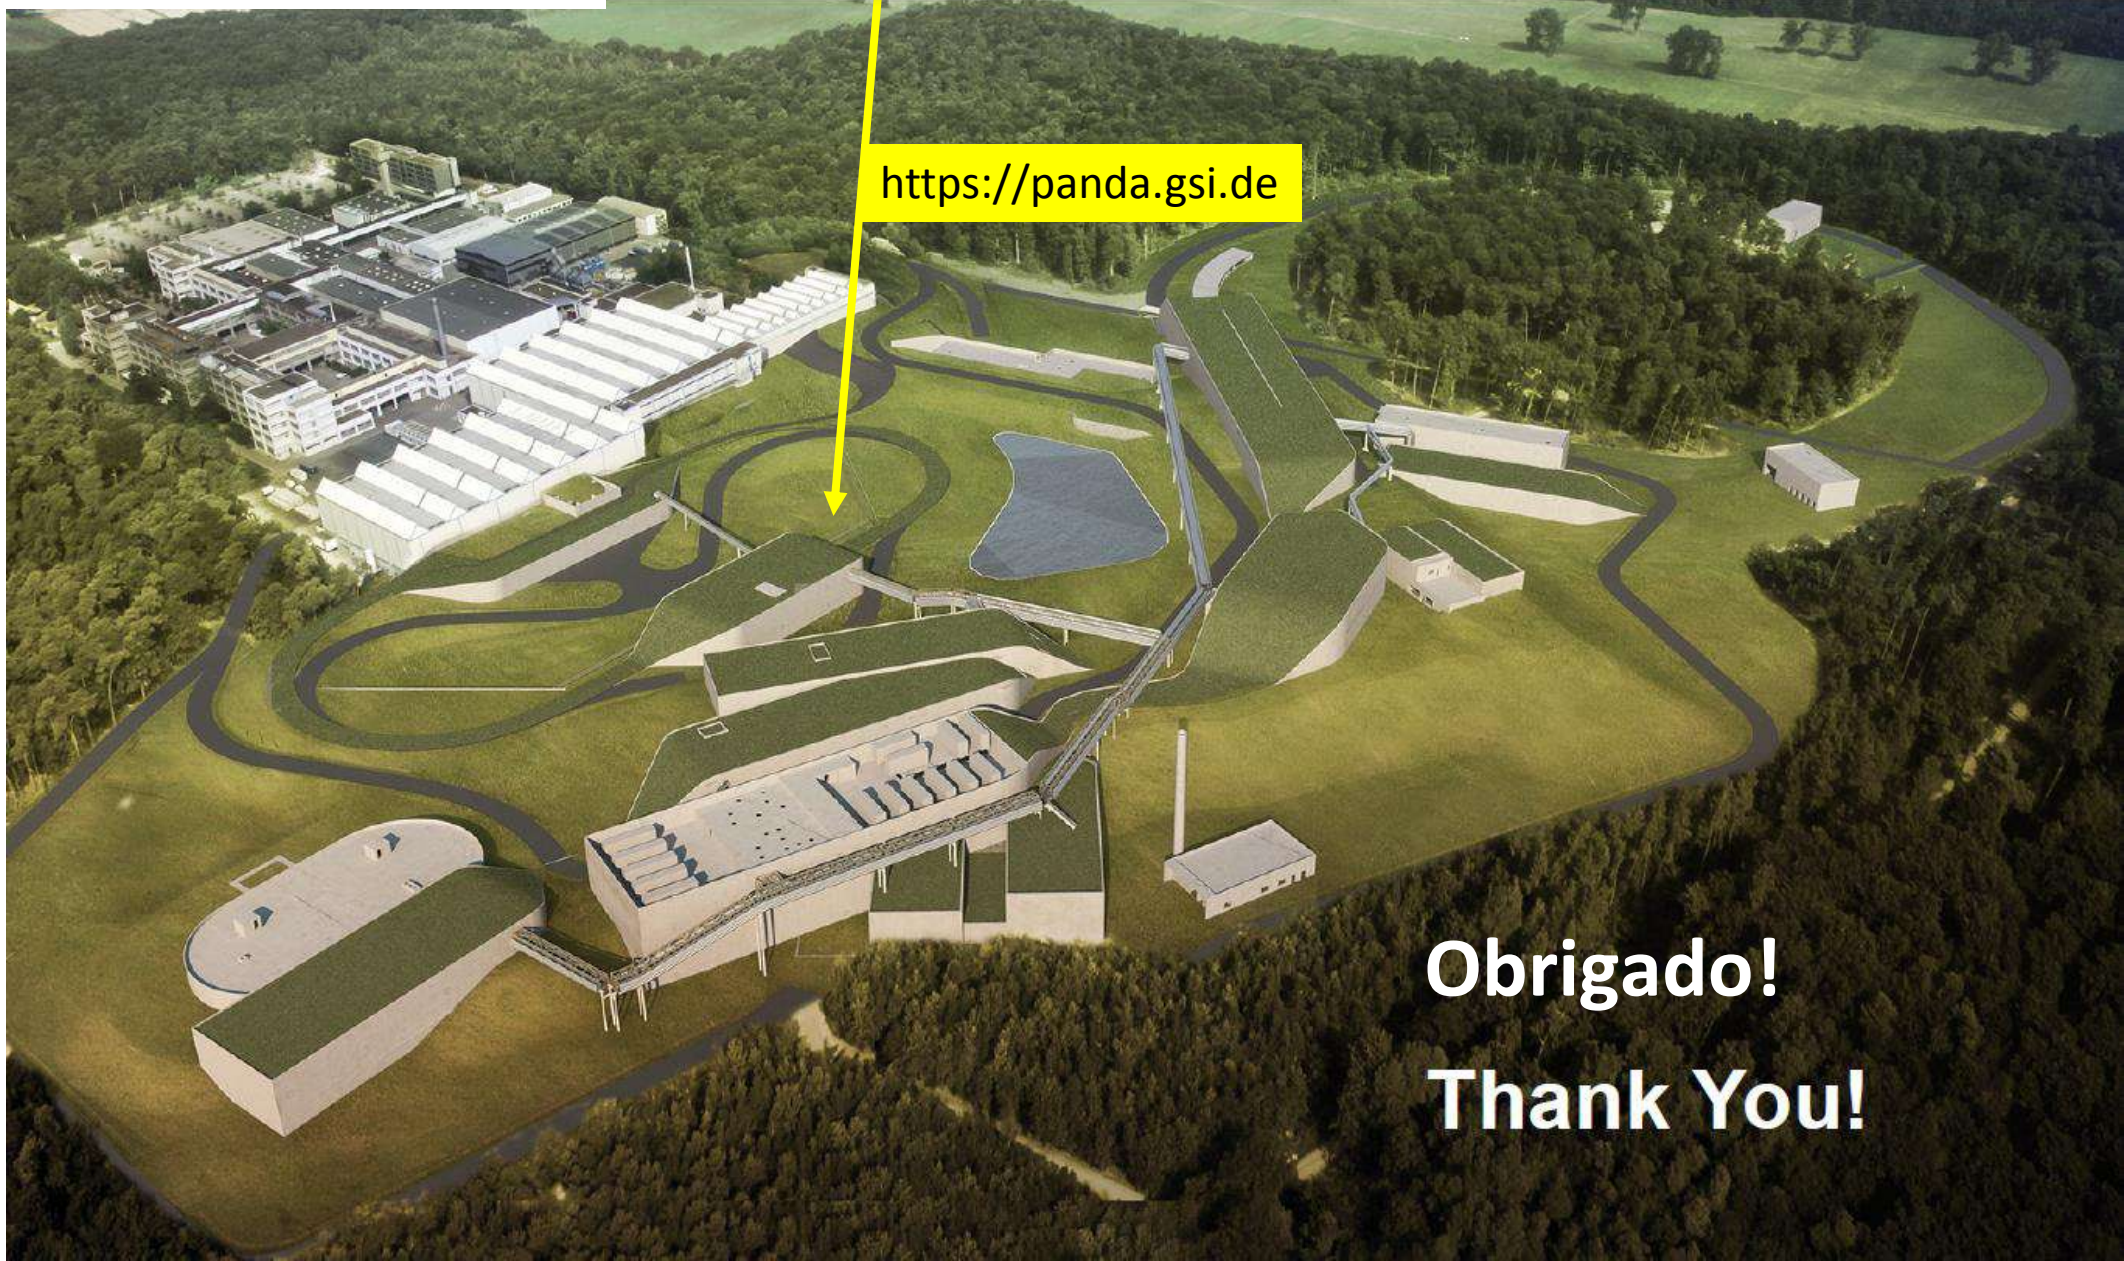

Obrigado!
Thank You!

Extra slides



FAIR Groundbreaking Event – 4-July-2017



FAIR Council members.



Klaus Peters – PANDA Spokesperson.

FAIR Construction Field



Construction Site (almost today)



